


## Glass Passivated Junction Rectifier



### FEATURES

- Superrectifier structure for high reliability application
- Cavity-free glass-passivated junction
- Low forward voltage drop
- Low leakage current
- High forward surge capability
- Meets environmental standard MIL-S-19500
- Solder dip 275 °C max. 10 s, per JESD 22-B106
- AEC-Q101 qualified
- Compliant to RoHS directive 2002/95/EC and in accordance to WEEE 2002/96/EC

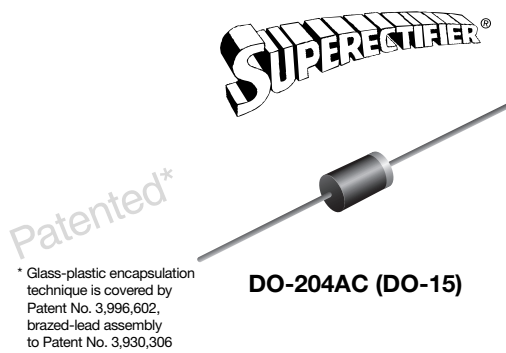

**RoHS**  
COMPLIANT

### TYPICAL APPLICATIONS

For use in general purpose rectification of power supplies, inverters, converters and freewheeling diodes application.

### MECHANICAL DATA

**Case:** DO-204AC, molded epoxy over glass body  
Molding compound meets UL 94 V-0 flammability rating  
Base P/N-E3 - RoHS compliant, commercial grade  
Base P/NHE3 - RoHS compliant, AEC-Q101 qualified

**Terminals:** Matte tin plated leads, solderable per J-STD-002 and JESD 22-B102  
E3 suffix meets JESD 201 class 1A whisker test, HE3 suffix meets JESD 201 class 2 whisker test

**Polarity:** Color band denotes cathode end

| PRIMARY CHARACTERISTICS |                |
|-------------------------|----------------|
| $I_{F(AV)}$             | 1.0 A          |
| $V_{RRM}$               | 200 V to 800 V |
| $I_{FSM}$               | 50 A           |
| $I_R$                   | 5.0 $\mu$ A    |
| $V_F$                   | 1.2 V          |
| $T_J$ max.              | 175 °C         |

| MAXIMUM RATINGS ( $T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)                                   |                                  |               |          |          |          |                  |
|--|----------------------------------|---------------|----------|----------|----------|------------------|
| PARAMETER  | SYMBOL                           | 1N5059GP      | 1N5060GP | 1N5061GP | 1N5062GP | UNIT             |
| Maximum repetitive peak reverse voltage  | $V_{RRM}^{(1)}$                  | 200           | 400      | 600      | 800      | V                |
| Maximum RMS voltage  | $V_{RMS}$                        | 140           | 280      | 420      | 560      | V                |
| Maximum DC blocking voltage  | $V_{DC}^{(1)}$                   | 200           | 400      | 600      | 800      | V                |
| Maximum average forward rectified current<br>0.375" (9.5 mm) lead length at $T_A = 75\text{ }^\circ\text{C}$ | $I_{F(AV)}^{(1)}$                | 1.0           |          |          |          | A                |
| Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load                           | $I_{FSM}^{(1)}$                  | 50            |          |          |          | A                |
| Maximum full load reverse current, full cycle average 0.375" (9.5 mm) lead length at                         | $T_A = 25\text{ }^\circ\text{C}$ | 5.0           |          |          |          | $\mu$ A          |
|  | $T_A = 75\text{ }^\circ\text{C}$ | 150           |          |          |          |                  |
| Operating junction and storage temperature range   | $T_J, T_{STG}$                   | - 65 to + 175 |          |          |          | $^\circ\text{C}$ |

**Note**

<sup>(1)</sup> JEDEC registered values

# 1N5059GP thru 1N5062GP

Vishay General Semiconductor



| ELECTRICAL CHARACTERISTICS (T <sub>A</sub> = 25 °C unless otherwise noted) |  |                         |                               |          |          |          |          |      |
|--|--|-------------------------|-------------------------------|----------|----------|----------|----------|------|
| PARAMETER  | TEST CONDITIONS  |                         | SYMBOL                        | 1N5059GP | 1N5060GP | 1N5061GP | 1N5062GP | UNIT |
| Max. instantaneous forward voltage   | 1.0 A  | T <sub>A</sub> = 75 °C  | V <sub>F</sub> <sup>(1)</sup> |          |          | 1.2      |          | V    |
| Maximum DC reverse current at rated DC blocking voltage                    |  | T <sub>A</sub> = 25 °C  | I <sub>R</sub> <sup>(1)</sup> |          |          | 5.0      |          | μA   |
|  |  | T <sub>A</sub> = 175 °C |                               |          |          | 300      |          |      |
| Typical reverse recovery time  | I <sub>F</sub> = 0.5 A, I <sub>R</sub> = 1.0 A, I <sub>rr</sub> = 0.25 A |                         | t <sub>rr</sub>               |          |          | 2.0      |          | μs   |
| Typical junction capacitance   | 4.0 V, 1 MHz   |                         | C <sub>J</sub>                |          |          | 15       |          | pF   |

**Note**

<sup>(1)</sup> JEDEC registered values

| THERMAL CHARACTERISTICS (T <sub>A</sub> = 25 °C unless otherwise noted) |                                 |          |          |          |          |      |
|---|---------------------------------|----------|----------|----------|----------|------|
| PARAMETER   | SYMBOL                          | 1N5059GP | 1N5060GP | 1N5061GP | 1N5062GP | UNIT |
| Typical thermal resistance  | R <sub>θJA</sub> <sup>(1)</sup> |          |          | 45       |          | °C/W |
|   | R <sub>θJL</sub> <sup>(1)</sup> |          |          | 20       |          |      |

**Note**

<sup>(1)</sup> Thermal resistance from junction to ambient at 0.375" (9.5 mm) lead length, P.C.B. mounted

| ORDERING INFORMATION (Example) |                 |                        |               |                                  |
|--------------------------------|-----------------|------------------------|---------------|----------------------------------|
| PREFERRED P/N                  | UNIT WEIGHT (g) | PREFERRED PACKAGE CODE | BASE QUANTITY | DELIVERY MODE                    |
| 1N5061GP-E3/54                 | 0.425           | 54                     | 4000          | 13" diameter paper tape and reel |
| 1N5061GP-E3/73                 | 0.425           | 73                     | 2000          | Ammo pack packaging              |
| 1N5061GPHE3/54 <sup>(1)</sup>  | 0.425           | 54                     | 4000          | 13" diameter paper tape and reel |
| 1N5061GPHE3/73 <sup>(1)</sup>  | 0.425           | 73                     | 2000          | Ammo pack packaging              |

**Note**

<sup>(1)</sup> AEC-Q101 qualified

## RATINGS AND CHARACTERISTICS CURVES

(T<sub>A</sub> = 25 °C unless otherwise noted)

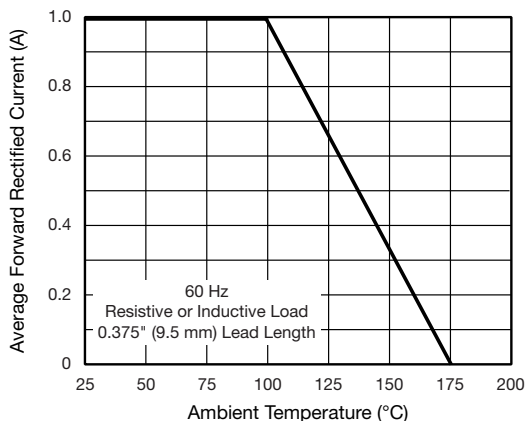


Fig. 1 - Forward Current Derating Curve

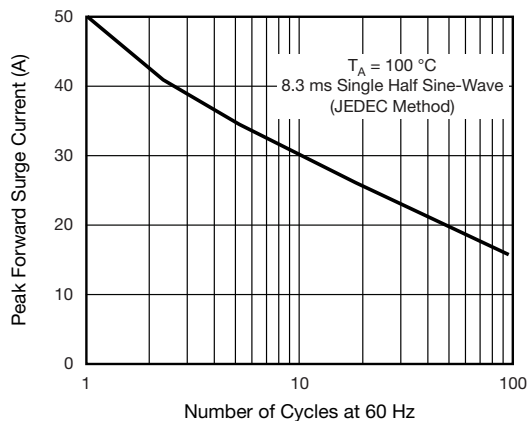


Fig. 2 - Maximum Non-repetitive Peak Forward Surge Current

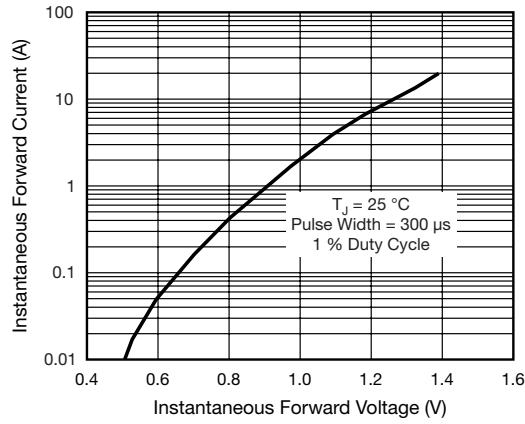


Fig. 3 - Typical Instantaneous Forward Characteristics

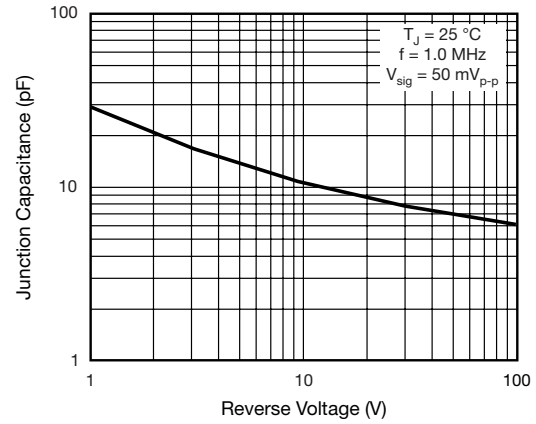


Fig. 5 - Typical Junction Capacitance

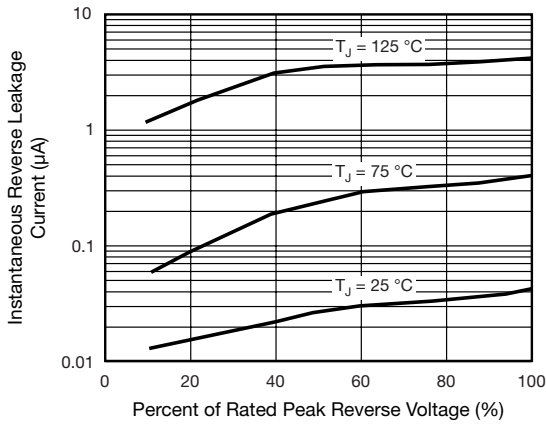


Fig. 4 - Typical Reverse Characteristics


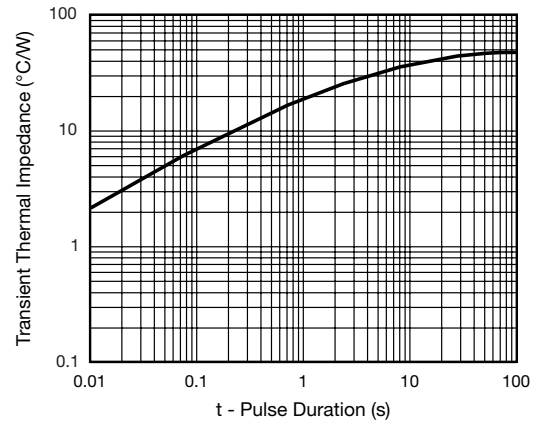


Fig. 6 - Typical Transient Thermal Impedance

### PACKAGE OUTLINE DIMENSIONS in inches (millimeters)

#### DO-204AC (DO-15)



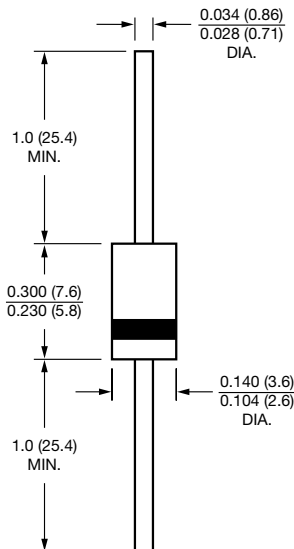

## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.