Technical enquiries - email: mk@murata-ps.com, tel: +44 (0)1908 615232

766 Series

Pulse Transformers

Murata Power Solutions

c		OTI	GU	

Order Code	Turns Ratio ±2%	Min. Primary Inductance	Min. Primary Constant, Er	Max. Leakage Inductance	Max. Interwinding Capacitance	Max. DC Resistance	Max. Isolation Voltage	Pin Connection Style	Mechcanical Dimensions
		μH	Vµs	μH	pF	Ω	Vrms	ē.	_
76600/1C	1:1	1916	17.5	0.60	49	1.50		A	
76600/2C	1:1	492	8.5	0.30	22	0.80			
76600/3C	1:1	219	5.5	0.25	14	0.50			
76600/4C	1:1	50	4.0	0.20	10	0.40			
76601/1C	1:1	1916	17.5	0.60	49	1.50			
76601/2C	1:1	492	8.5	0.30	22	0.80	500 B	1	
76601/3C	1:1	219	5.5	0.25	12	0.50		В	
76601/20C	1:1	20.1	2.5	0.20	5	0.20			
76601/23C	1:1	938	10.5	0.20	35	0.15			
76601/24C	1:1	11.7mH	50.5	0.40	250	1.35			
76602/1C	1:1:1	2060	17.5	0.60	72	1.50		С	2
76615/1C	1ст:1ст	3200	45	2.00	52	1.00		D	
76616/3C	2ст:1ст	4350	23	3.00	35	1.00		D	

Please note: For additional variants please see 786 series datasheet.

	ABSOLUTE MAXIMUM RATINGS	
	Operating free air temperature range	0°C to 70°C
_	Storage temperature range	-60°C to 125°C

SOLDERING INFORMATION¹

Peak wave solder temperature	300°C for 10 seconds
Pin finish	Matte tin with nickel pre-plate

1 For further information, please visit www.murata-ps.com/rohs All specifications typical at T,=25°C.



muRata 🚺

FEATURES

- RoHS compliant
- 4 Configurations
- Inductance to 11.7mH
- Up to 50 Vµs ET
- Industry standard pinout
- 500Vpc Isolation
- PCB mounting
- UL 94 V-0 package materials
- Toroidal construction
- Fully encapsulated

DESCRIPTION


The 766 Series is a range of general purpose pulse transformers. Common applications include line coupling, impedance-matching, or isolating. The devices can also be used in small isolated power supplies or as common-mode chokes in filtering applications.



www.murata-ps.com



PACKAGE SPECIFICATIONS

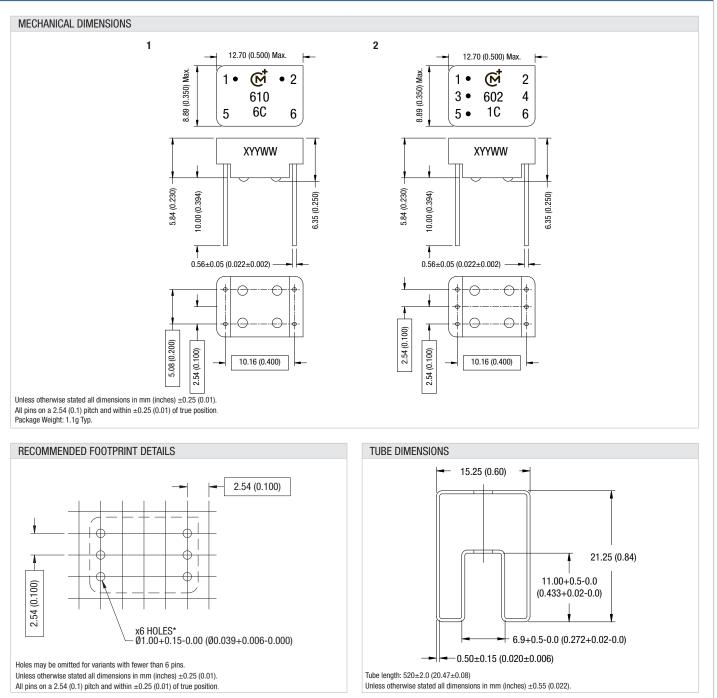


766 Series

Pulse Transformers

766 Series

Pulse Transformers

PACKAGE SPECIFICATIONS (continued)

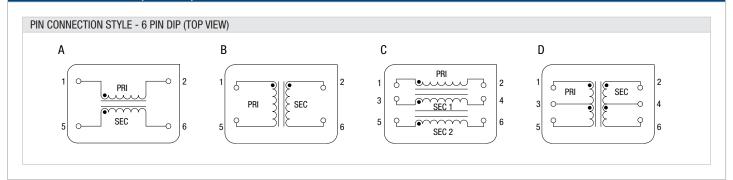

TECHNICAL NOTES

ISOLATION VOLTAGE

'Hi Pot Test', 'Flash Tested', 'Withstand Voltage', 'Proof Voltage', 'Dielectric Withstand Voltage' & 'Isolation Test Voltage' are all terms that relate to the same thing, a test voltage, applied for a specified time, across a component designed to provide electrical isolation, to verify the integrity of that isolation.

All products in this series are 100% production tested at their stated isolation voltage.

A question commonly asked is, "What is the continuous voltage that can be applied across the part in normal operation?"

For a part holding no specific agency approvals both input and output should normally be maintained within SELV limits i.e. less than 42.4V peak, or 60VDC. The isolation test voltage represents a measure of immunity to transient voltages and the part should never be used as an element of a safety isolation system. The part could be expected to function correctly with several hundred volts offset applied continuously across the isolation barrier; but then the circuitry on both sides of the barrier must be regarded as operating at an unsafe voltage and further isolation/insulation systems must form a barrier between these circuits and any user-accessible circuitry according to safety standard requirements.

REPEATED HIGH-VOLTAGE ISOLATION TESTING

It is well known that repeated high-voltage isolation testing of a barrier component can actually degrade isolation capability, to a lesser or greater degree depending on materials, construction and environment. This series has toroidal isolation transformers, with no additional insulation between primary and secondary windings of enameled wire. While parts can be expected to withstand several times the stated test voltage, the isolation capability does depend on the wire insulation. Any material, including this enamel (typically polyurethane) is susceptible to eventual chemical degradation when subject to very high applied voltages thus implying that the number of tests should be strictly limited. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage.

This consideration equally applies to agency recognized parts rated for better than functional isolation where the wire enamel insulation is always supplemented by a further insulation system of physical spacing or barriers.

muRata Ps Murata Power Solutions

Murata Power Solutions, Inc. 11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A. Tel: (508) 339-3000 (800) 233-2765 Fax: (508) 339-6356

www.murata-ps.com email: sales@murata-ps.com ISO 9001 REGISTERED

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.

USA:	Mansfield (MA), Tel: (800) 233 2765, email: sales@murata-ps.com			
Canada:	Toronto, Tel: (866) 740 1232, email: toronto@murata-ps.com			
UK:	Milton Keynes, Tel: +44 (0)1908 615232, email: mk@murata-ps.com			
France:	Montigny Le Bretonneux, Tel: +33 (0)1 34 60 01 01, email: france@murata-ps.com			
Germany:	München, Tel: +49 (0)89-544334-0, email: munich@murata-ps.com			
Japan:	Tokyo, Tel: 3-3779-1031, email: sales_tokyo@murata-ps.com Osaka, Tel: 6-6354-2025, email: sales_osaka@murata-ps.com Website: www.murata-ps.jp			
China:	Shanghai, Tel: +86 215 027 3678, email: shanghai@murata-ps.com Guangzhou, Tel: +86 208 221 8066, email: guangzhou@murata-ps.com			

Technical enquiries - email: mk@murata-ps.com, tel: +44 (0)1908 615232