

Inductive Coupler

F92A

Coupler Transmits Mechanical Switch Closure Signals to Inductive Proximity Sensors

- Ideal for reliable detection of revolving, moving objects
- Works with any M18 size inductive proximity sensor, such as E2E-X5 or E2F-X5
- Coupler operates without power supply
- Provides positive signal transmission even through non-metallic walls of glass or resin
- Water, oil and dust resistant to IP67 standards
- Prewired with 2 m (6.56 ft) of cable



Ordering Information.


Size	Transmitting distance	Applicable receiver type	Part number
M18	5 mm (0.20 in)	Inductive proximity sensor such as E2E-X5, E2F-X5	F92A-C-1

Specifications _____

Part number		F92A-C-1	
Body		M18 size	
Supply voltage		None required	
Input signal device	Туре	Mechanical contact switch	
	Switching capacity	0.1 mA, 100 mV	
	Control resistance	300 m $Ω$ max.	
Receiver	Туре	M18 size inductive proximity sensor, such as Omron's E2E-X5 or E2F-X5	
	Effective transmitting distance	5 mm (0.2 in) maximum	
	Sensing distance	0.5 to 4.5 mm (0.02 to 0.18 in) from inductive proximity sensor	
Response time		1 ms max. from contact closure input to output transmission	
Materials	Housing	Nickel-plated brass	
	Transmission face	Plastic	
	Cable sheath	Plastic	
Mounting		Two lock washers and M18 nuts included	
Connections	Prewired	2-conductor cable, 2 m (6.56 ft) length; 5 m (16.4 ft) max. cable extension	
Weight		Approx. 165 g (5.8 oz)	
Enclosure ratings	UL	_	
	NEMA	1, 3, 4X, 6, 12, 13	
	IEC 144	IP67	
Ambient operating temperature		-25°C to 70°C (-13°F to 158°F)	


■ CIRCUIT DIAGRAM AND CONNECTIONS

Signal initiation must originate from a small voltage/current type switch.

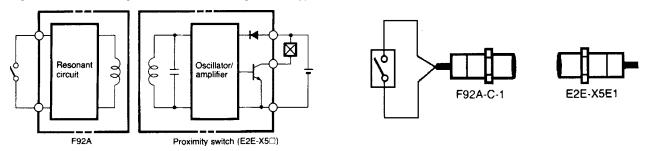

Dimensions .

Unit: mm (inch)





OMRON ELECTRONICS LLC

Schaumburg, IL 60173 1-800-55-OMRON

One East Commerce Drive

OMRON ON-LINE

Global - http://www.omron.com USA - http://www.omron.com/oei Canada - http://www.omron.com/oci **OMRON CANADA, INC.**

885 Milner Avenue Scarborough, Ontario M1B 5V8 416-286-6465