

**MICRO SWITCH**FREEPORT, ILLINOIS, U.S.A.  
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

**ASSEMBLY -  
TOGGLE SWITCH**

CATALOG LISTING

**23AT118-T2****23AT118-T2****M**  
DRAWING  
NUMBERISSUE  
**4**

RELEASE NO. PR-12200 REPLACES

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK



CHECK

CHECK

CHECK

CHECK

CHECK

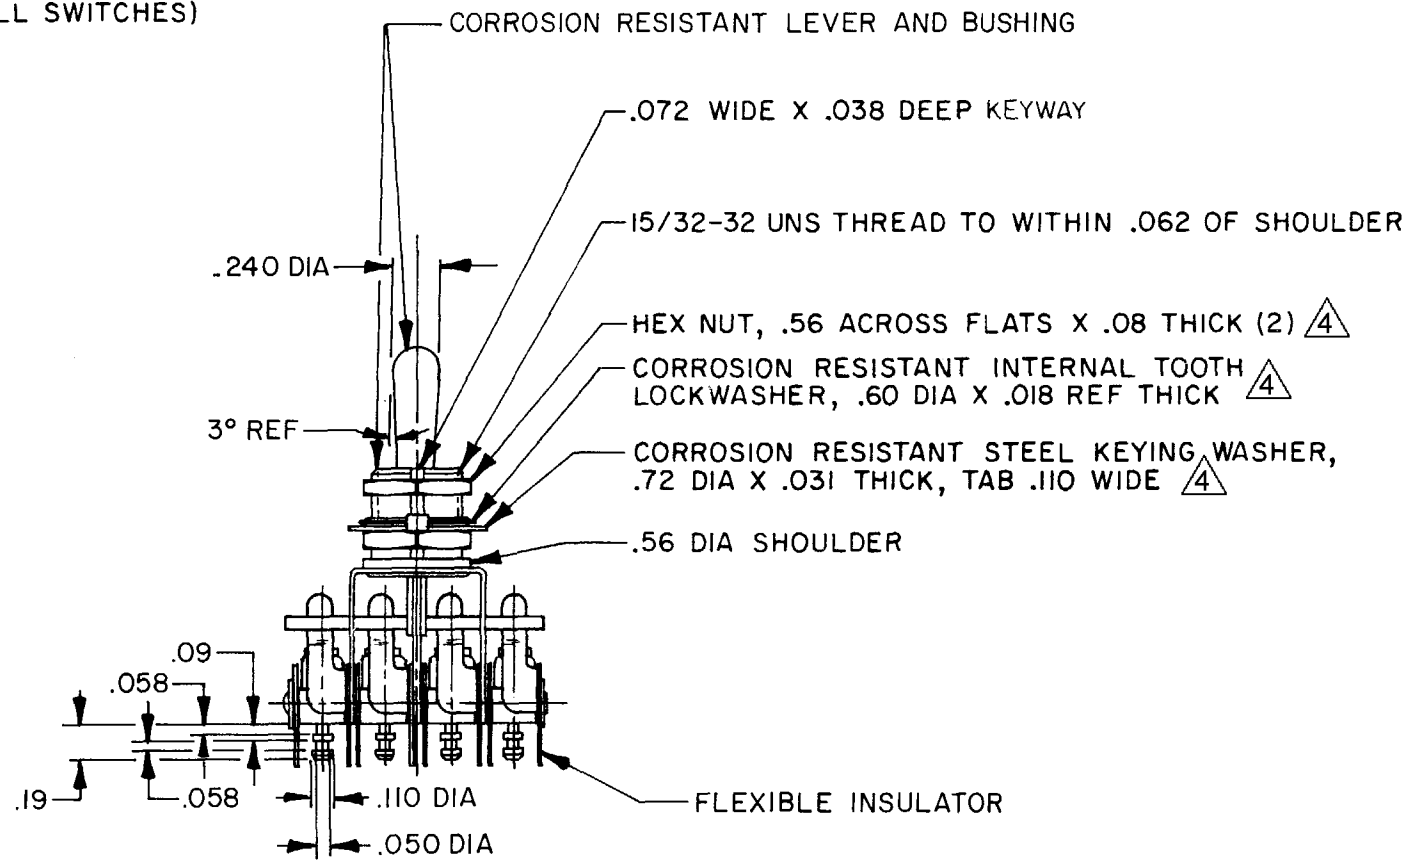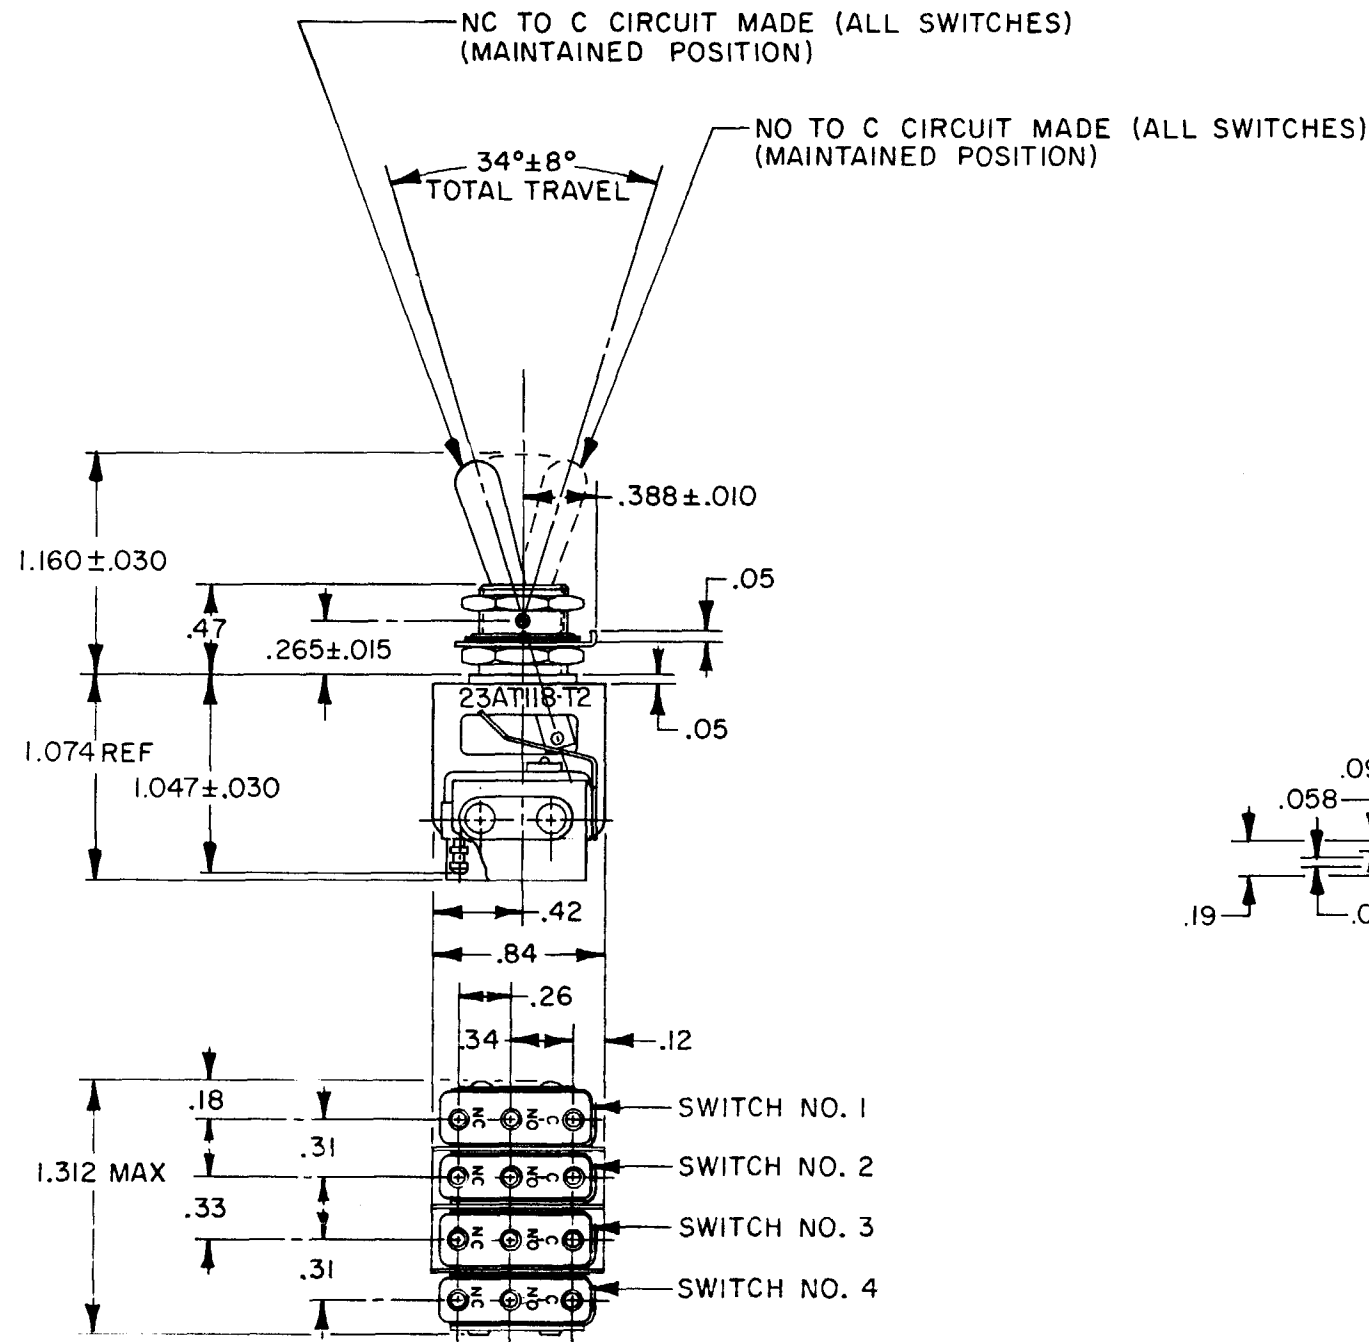

- NOTES
- 1 - SWITCH NO. 1 AND 2 ARE CATALOG LISTING 22SM157-T2 TYPE (SILVER CONTACTS)  
SWITCH NO. 3 AND 4 ARE CATALOG LISTING 11SM23-T2 TYPE (GOLD CONTACTS)
  - 2 - SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY
  - 3 - TERMINALS ARE PLATED FOR SOLDERING
  - 4 - HARDWARE FURNISHED ASSEMBLED WITH SWITCH OR IN PACKET PER MIL-PRF-8805
  - 5 - REPLACEMENT MOUNTING HARDWARE PACKET 15PA312-AT

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

SCALE FULL


DO NOT SCALE PRINT

TOLERANCES  
APPLY TO DESIGN UNITS CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

DIM.	TOL.	DIM.	TOL.
mm	mm/in	in	mm/in
NO PLACES	X	1/04	X X
ONE PLACE	X, X	0.4/018	X XX
TWO PLACES	X, XX	0.15/008	X XXX
THREE PLACES	X, XXX		X XXXX
ANGLES			

DESIGN UNITS  SI METRIC  US CUSTOMARY

THIRD ANGLE PROJECTION



WEIGHT

## ELECTRICAL DATA

CONTACT ARRANGEMENT  
SPDT (4)

SWITCH NO. 3 AND 4  
30 VOLTS DC RATING  
INDUCTIVE - - SEA LEVEL - - 1/2 AMP  
50,000 FT - - - - 1/2 AMP  
RESISTIVE SEA LEVEL - - - - 1 AMP  
50,000 FT - - - - 1 AMP  
MAXIMUM INRUSH - - - - - 2 AMP

SWITCH NO. 1 AND 2  
30 VOLTS DC RATING (SEA LEVEL)  
INDUCTIVE - - - - - 5 AMP  
RESISTIVE - - - - - 10 AMP

FO-32851-B

DRAWN

CJH 2 JUN 83

CHECK

CHECK

CHECK