
Flat Inductive Proximity Sensor

CSM_TL-W_DS_E_3_1

Standard Flat Sensors in Many Different Variations

- Only 6 mm thick yet provides a sensing distance of 3 mm (TL-W3MC1).
- Aluminum die-cast models also available.





Ordering Information

Sensors [Refer to *Dimensions* on page 8.] DC 2-Wire Models

	Sensing distance			Model		
Appearance			stance	Operation mode		
				NO	NC	
Unshielded	5 n	nm		TL-W5MD1 *1	TL-W5MD2 *1	

DC 3-Wire Models

Appearance	Appearance Sensing distance		Output configuration	Model Operation mode	
				NO	NC
	1 .5 mm			*1 TL-W1R5MC1 2M *2	
Unshielded	3 mm		DC 3-wire, NPN	*1 TL-W3MC1 2M *2	TL-W3MC2 2M
	5 mm		,	*1 TL-W5MC1 2M *2	TL-W5MC2 2M
		20 mm		TL-W20ME1 2M *1	TL-W20ME2 2M *1
Shielded			DC 3-wire, NPN	TL-W5E1 2M	TL-W5E2 2M
	5 mm		DC 3-wire, PNP	TL-W5F1 2M	TL-W5F2 2M

*1. Models with a different frequency are also available to prevent mutual interference. The model numbers are TL-WDMD5 (e.g., TL-W5MD15). *2. Models with robotics cables are also available. The model numbers are TL-WDMC1-R (e.g., TL-W1R5MC1-R).

Ratings and Specifications

DC 2-Wire Models

Item Model		TL-W5MD		
Sensing distance		5 mm ±10%		
Set dista	ance	0 to 4 mm		
Differen	tial travel	10% max. of sensing distance		
Detectable object		Ferrous metal (The sensing distance decreases with non-ferrous metal. Refer to <i>Engineering Data</i> on page 5.)		
Standar	d sensing object	Iron, $18 \times 18 \times 1$ mm		
Respon	se frequency *	500 Hz		
	upply voltage ng voltage range)	12 to 24 VDC (10 to 30 VDC), ripple (p-p): 10% max.		
Leakage	e current	0.8 mA max.		
Con-	Load current	3 to 100 mA		
trol output	Residual voltage	3.3 V max. (under load current of 100 mA with cable length of 2 m)		
Indicators		D1 Models: Operation indicator (red), Setting indicator (green) D2 Models: Operation indicator (red)		
Operation mode (with sensing object approaching)		D1 Models: NO Refer to the timing charts under <i>I/O Circuit Diagrams</i> on page 6 for details. D2 Models: NC		
Protection circuits		Load short-circuit protection, Surge suppressor		
Ambient temperature range		Operating/Storage: -25 to 70°C (with no icing or condensation)		
Ambient humidity range		Operating/Storage: 35% to 95% (with no condensation)		
Tempera	ature influence	$\pm 10\%$ max. of sensing distance at 23°C in the temperature range of –25 to 70°C		
Voltage	influence	$\pm 2.5\%$ max. of sensing distance at rated voltage in the rated voltage $\pm 15\%$ range		
Insulatio	on resistance	50 M Ω min. (at 500 VDC) between current-carrying parts and case		
Dielectri	ic strength	1,000 VAC for 1 min between current-carrying parts and case		
Vibratio	n resistance	Destruction: 10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions		
Shock resistance		Destruction: 500 m/s ² 3 times each in X, Y, and Z directions		
Degree of protection		IEC 60529 IP67, in-house standards: oil-resistant		
Connection method		Pre-wired Models (Standard cable length: 2 m)		
Weight (packed state)		Approx. 45 g		
Materials		Heat-resistant ABS		
	Sensing surface			
Accessories		Instruction manual		


* The response frequency is an average value. Measurement conditions are as follows: standard sensing object, a distance of twice the standard sensing object, and a set distance of half the sensing distance.


DC 3-Wire Models


ltem	Model	TL-W1R5MC1	TL-W3MC	TL-W5MC	TL-W5E1, TL-W5E2 TL-W5F1, TL-W5F2	TL-W20ME1 TL-W20ME2		
Sensing o	distance	1.5 mm ±10%	3 mm ±10%	5 mm ±10%		20 mm ±10%		
Set distar	nce	0 to 1.2 mm	0 to 2.4 mm	0 to 4 mm		0 to 16 mm		
Differential travel 10% max. of sensing distance					1% to 15% of sensing distance			
Detectable object Fe		Ferrous metal (The se	Ferrous metal (The sensing distance decreases with non-ferrous metal. Refer to Engineering Data or					
Standard sensing object		Iron, $8 \times 8 \times 1$ mm	, $8 \times 8 \times 1 \text{ mm}$ Iron, $12 \times 12 \times 1 \text{ mm}$ Iron, $18 \times 18 \times 1 \text{ mm}$			Iron, $50 \times 50 \times$ 1 mm		
Response frequency	y	1 kHz min.	600 Hz min.	500 Hz min.	300 Hz min.	40 Hz min.		
age (oper age range	pply volt- ating volt- e)	12 to 24 VDC (10 to 3	0 VDC), ripple (p-p): 10)% max.	12 to 24 VDC (10 to 30 VDC), ripple (p-p): 20% max.	12 to 24 VDC (10 to 30 VDC), ripple (p-p): 10% max.		
Current consump	tion	15 mA max. at 24 VD	C (no-load)	10 mA max.	15 mA max. at 24 VDC (no-load)	8 mA at 12 VDC, 15 mA at 24 VDC		
Control output		NPN open collector 50 mA max. at 12 VDC (30 VDC max.) 100 mA max. at 24 VDC (30 VDC max.)	200 mA	100 mA max. at 12 VDC 200 mA max. at 24 VDC				
	Residual voltage	1 V max. (under load current of 100 mA with cable length of 2 m)		1 V max. (under load current of 50 mA with cable length of 2 m)	2 V max. (under load current of 200 mA with cable length of 2 m)	1 V max. (under load current of 200 mA with ca- ble length of 2 m)		
Indicators	S	Detection indicator (re	ed)					
(with sensing ob-		NO C1 Models: NO C2/B2 Models: NC E1/F1 Models: NO E2/F2 Models: NC						
		-	offer to the timing charts under I/O Circuit Diagrams on page 6 for details.					
Ambient temperatu	mbient emperature range Operating/Storage: -25 to 70°C (with no icing or condensation)							
Ambient humidity range Operating/Storage: 35% to 95% (with no condensation)								
Temperat influence		±10% max. of sensing	g distance at 23°C in the		–25 to 70°C			
Voltage influence ±2.5% max. of sensin age in the rated volta		g distance at rated volt- ge $\pm 10\%$ range			at rated voltage in			
Insulatior resistanc		50 M Ω min. (at 500 V	DC) between current-ca	arrying parts and case				
	strength	1,000 VAC, 50/60 Hz	for 1 minute between c	urrent-carrying parts ar	nd case			
Vibration resistanc		Destruction: 10 to 55	Hz, 1.5-mm double am	olitude for 2 hours each	i in X, Y, and Z directions	Destruction		
Shock resistance Destruction: 500 m/s ² 3 times each in X, Y		3 times each in X, Y, a	nd Z directions		Destruction: 500 m/s ² 10 times each in X, Y, and Z direc- tions			
Degree of protection IEC 60529 IP67, in-house standards: oil-resistant								
Connection method Pre-wired Models (Standard cable length: 2 m)		m)						
Weight (packed s	state)	Approx. 30 g		Approx. 45 g	Approx. 70 g	Approx. 180 g		
Materi-	Case	Heat-resistant ABS			Aluminum die-cast	Heat-resistant ABS		
als	Sensing surface	Heat-resistant ABS						
Accessor	ies	Mounting Bracket, Ins	truction manual	Instruction manual				

Engineering Data (Typical)


Sensing Area



















Influence of Sensing Object Size and Material


TL-W1R5MC1












TL-W5MC1



I/O Circuit Diagrams

DC 2-Wire Models

Operation mode	Model	Timing chart	Output circuit
NO	TL-W5MD1	Unstable Set position sensing object Stable sensing area Proximity Sensor Sensing object 100 80 (TYP) 0 (%) 100 80 (TYP) 0 (%) Tated sensing i distance 0N OFF Setting indicator (green) 0N OFF Operation indicator (red) 0N OFF 0N OFF Control output	Proximity Sensor circuit Blue
NC	TL-W5MD2	Non-sensing area Sensing area Proximity Sensor Sensing isolated 100 0 (%) 100 0 Rated sensing distance ON OFF Operation indicator (red) ON OFF OFF Control output	Note: The load can be connected to either the +V or 0 V side.

DC 3-Wire Models

Operation mode	Model	Timing chart	Output circuit
NO	TL-W1R5MC1 TL-W3MC1 TL-W5MC1	Sensing object Present Not present Output transistor ON (load) OFF Detection indicator (red) ON OFF	Proximity Sensor
NC	TL-W3MC2 TL-W5MC2	Sensing object Present Not present Output transistor (load) OFF Detection indicator (red) OFF	* Load current: 100 mA max.
NO	TL-W5E1 TL-W20ME1	Sensing object Present Not present Load (between brown and black leads) Operate Reset Output voltage (between black and blue leads) High Low Detection indicator (red) ON OFF	Proximity Sensor main circuit 2.2 Ω Output
NC	TL-W5E2 TL-W20ME2	Sensing object Present Not present Load (between brown and black leads) Operate Reset Output voltage (between black and blue leads) High Low Detection indicator (red) ON OFF	*1. Load current: 200 mA max. *2. When a transistor is connected.
NO	TL-W5F1	Sensing object Present Not present Load (between blue and black leads) Operate Reset Output voltage (between blue and black leads) High Low Detection indicator (red) ON OFF	Proximity Sensor main 2.2.Ω Output
NC	TL-W5F2	Sensing object Present Not present Load (between blue and black leads) Operate Reset Output voltage (between blue and black leads) High Low Detection indicator (red) ON OFF	4.7 kΩ 4.7 kΩ 4.7 kΩ 4.7 kΩ 4.7 kΩ 4.7 kΩ Blue 0 V *1. Load current: 200 mA max. *2. When a transistor is connected.

Safety Precautions

Refer to Warranty and Limitations of Liability.

<u> WARNING</u>

This product is not designed or rated for ensuring safety of persons either directly or indirectly. Do not use it for such purposes.



Precautions for Correct Use


Do not use this product under ambient conditions that exceed the ratings.

Design

Influence of Surrounding Metal


When mounting the Sensor within a metal panel, ensure that the clearances given in the following table are maintained. Failure to maintain these distances may cause deterioration in the performance of the Sensor.

Metal on a Single Side (Not Exceeding the Height of the Sensor Surface)



Metals on Both Sides and in Front of the Sensor





Influence of Surrounding Metal (Unit: mm)

Model Distance	I	m	n
TL-W1R5MC1	2		8
TL-W3MC	3	0	12
TL-W5MD	5	0	20
TL-W5MC1	5		20
TL-W20ME	25	16	100
TL-W5E /-W5F	0	0	20


Applicable e-CON Connector Models and Manufacturers

The companies and model number of e-CON connections that can be used with Sensor cables are listed in the following table. Confirm applicability when purchasing e-CON connectors for connection to Pre-wired Sensors.

Model	Tyco Electronics AMP K.K.
TL-W1R5□/-W3□	1-1473562-4 (red)

Mutual Interference

When installing Sensors face-to-face or side-by-side, ensure that the minimum distances given in the following table are maintained.



Mutual Interference (Unit: mm)

Model Distance	A	В	
TL-W1R5MC1	75 (50)	25 (8)	
TL-W3MC	90 (60)	30 (10)	
TL-W5MD	120 (80)	60 (30)	
TL-W5MC1	120 (80)	00 (00)	
TL-W20ME	200 (100)	200 (100)	
TL-W5E /-W5F	50	35	

Note: Values in parentheses apply to Sensors operating at different frequencies.

Mounting

- Use M3 flat-head screws to mount the TL-W1R5MC1 and TL-W3MC1.
- Do not exceed the torque in the following table when tightening the resin cover screws.

Model	Torque
TL-W1R5MC1	
TL-W3MC	0.98 N⋅m
TL-W5MD	
TL-W20M	1.5 N⋅m

Adjustment

Turning ON the Power

An error pulse will occur (approximately 1 ms) if adjustments are made when turning ON the power or making AND connections.


Dimensions

(Unit: mm) Tolerance class IT16 applies to dimensions in this data sheet unless otherwise specified.

TL-W

TL-W1R5MC1

TL-W3MC

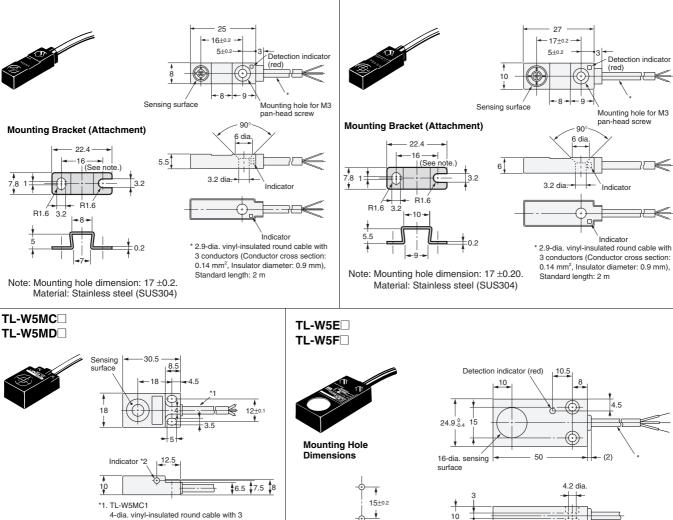


conductors (Conductor cross section: 0.2 mm² Insulator diameter: 1.2 mm), Standard length: 2 m TL-W5MD 4-dia. vinyl-insulated round cable with 2 conductors (Conductor cross section: 0.3 mm², Insulation diameter: 1.3 mm), Standard length: 2 m

- *2. C Models: Detection indicator (red) D Models: Operation indicator (red)
- Setting indicator (green)

7.2 dia. * 4-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.2 mm², Insulator diameter: 1.2 mm), Standard length: 2 m

TL-W20ME

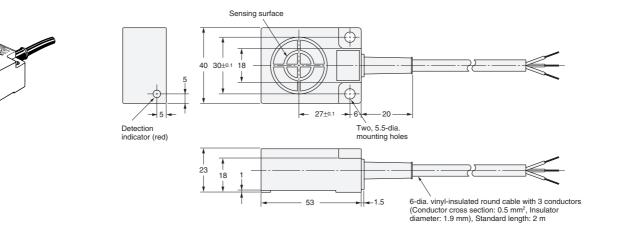

Two, 4.5 dia

Read and Understand This Catalog

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

Warranty and Limitations of Liability

WARRANTY

OMRON's exclusive warranty is that the products are free from defects in materials and workmanship for a period of one year (or other period if specified) from date of sale by OMRON.

OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, REGARDING NON-INFRINGEMENT, MERCHANTABILITY, OR FITNESS FOR PARTICULAR PURPOSE OF THE PRODUCTS. ANY BUYER OR USER ACKNOWLEDGES THAT THE BUYER OR USER ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. OMRON DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED.

LIMITATIONS OF LIABILITY

OMRON SHALL NOT BE RESPONSIBLE FOR SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED ON CONTRACT, WARRANTY, NEGLIGENCE, OR STRICT LIABILITY.

In no event shall the responsibility of OMRON for any act exceed the individual price of the product on which liability is asserted.

IN NO EVENT SHALL OMRON BE RESPONSIBLE FOR WARRANTY, REPAIR, OR OTHER CLAIMS REGARDING THE PRODUCTS UNLESS OMRON'S ANALYSIS CONFIRMS THAT THE PRODUCTS WERE PROPERLY HANDLED, STORED, INSTALLED, AND MAINTAINED AND NOT SUBJECT TO CONTAMINATION, ABUSE, MISUSE, OR INAPPROPRIATE MODIFICATION OR REPAIR.

Application Considerations

SUITABILITY FOR USE

OMRON shall not be responsible for conformity with any standards, codes, or regulations that apply to the combination of products in the customer's application or use of the products.

At the customer's request, OMRON will provide applicable third party certification documents identifying ratings and limitations of use that apply to the products. This information by itself is not sufficient for a complete determination of the suitability of the products in combination with the end product, machine, system, or other application or use.

The following are some examples of applications for which particular attention must be given. This is not intended to be an exhaustive list of all possible uses of the products, nor is it intended to imply that the uses listed may be suitable for the products:

- · Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this catalog.
- Nuclear energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations.
- · Systems, machines, and equipment that could present a risk to life or property.

Please know and observe all prohibitions of use applicable to the products.

NEVER USE THE PRODUCTS FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCTS ARE PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

PROGRAMMABLE PRODUCTS

OMRON shall not be responsible for the user's programming of a programmable product, or any consequence thereof.

Disclaimers

CHANGE IN SPECIFICATIONS

Product specifications and accessories may be changed at any time based on improvements and other reasons.

It is our practice to change model numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the products may be changed without any notice. When in doubt, special model numbers may be assigned to fix or establish key specifications for your application on your request. Please consult with your OMRON representative at any time to confirm actual specifications of purchased products.

DIMENSIONS AND WEIGHTS

Dimensions and weights are nominal and are not to be used for manufacturing purposes, even when tolerances are shown.

PERFORMANCE DATA

Performance data given in this catalog is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of OMRON's test conditions, and the users must correlate it to actual application requirements. Actual performance is subject to the OMRON Warranty and Limitations of Liability.

ERRORS AND OMISSIONS

The information in this document has been carefully checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical, or proofreading errors, or omissions.

2008.11

In the interest of product improvement, specifications are subject to change without notice.

OMRON Corporation Industrial Automation Company

http://www.ia.omron.com/