




Heyco® Thick Panel Dome Plugs

PANEL DIMENSIONS				PART NO.		DESCRIPTION	PART DIMENSIONS			
Maximum Thickness in.	mm.	Mounting Hole Diameter		Black	White		A		B	
		in.	mm.			Head in.	Diameter mm.	Overall in.	Height mm.	
.250	6,4	.500	12,7	3004	3005	DPT-500	.578	14,7	.562	14,3
.250	6,4	.625	15,9	3006*	3007*	DPT-625	.718	18,2	.562	14,3
.250	6,4	.750	19,1	3008*	3009*	DPT-750	.921	23,4	.562	14,3
.250	6,4	.875	22,2	3044	3045	DPT-875	1.015	25,8	.562	14,3
.250	6,4	1.000	25,4	3046	3047	DPT-1000	1.203	30,6	.562	14,3
.250	6,4	1.093- 1.125	27,8- 28,6	3018	3019	DPT-1093	1.218	30,9	.562	14,3
.250	6,4	1.187	30,1	3100	3101	DPT-1187	1.312	33,3	.562	14,3
.250	6,4	1.250	31,7	3102	3103	DPT-1250	1.375	34,9	.562	14,3
.250	6,4	1.375	34,9	3106	3107	DPT-1375	1.500	38,1	.562	14,3
.250	6,4	1.500	38,1	3048	3049	DPT-1500	1.671	42,4	.562	14,3
.250	6,4	1.750	44,5	3027	3028	DPT-1750	1.906	48,4	.562	14,3
.250	6,4	2.000	50,8	3050	3051	DPT-2000	2.170	55,1	.580	14,7

- Closes unneeded panel holes and electrical knock-outs.
- A convex, matte finish head that tapers to a thin edge.
- Locking fingers snap into holes with fingertip pressure for quick and easy installation.
- Withstands a push back force of 35 pounds.
- Available in multiple sizes for use in .500" (12,7 mm) to 2.00" (50,8 mm) diameter holes for panel thickness up to .250" (6,4 mm).

Standard color black. Consult Heyco for other colors.
 Locking fingers in fractional increments up to the maximum panel thickness.
 Approximate Head Thickness: .063" (1,6 mm). Thickness may vary.

*Depicts single panel design.

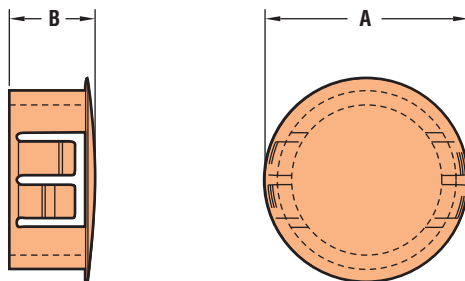

Material	6/6 Nylon
Certifications	Recognized under the Component Program of Underwriters' Laboratories, File E51579 Certified by Canadian Standards Association, File LR8919
Flammability Rating	94V-2
Material Temperature Index	257°F (125°C)—Maximum temperature on part not to exceed 221° (105°C)

Quick Specs