



VIEWING DIRECTION

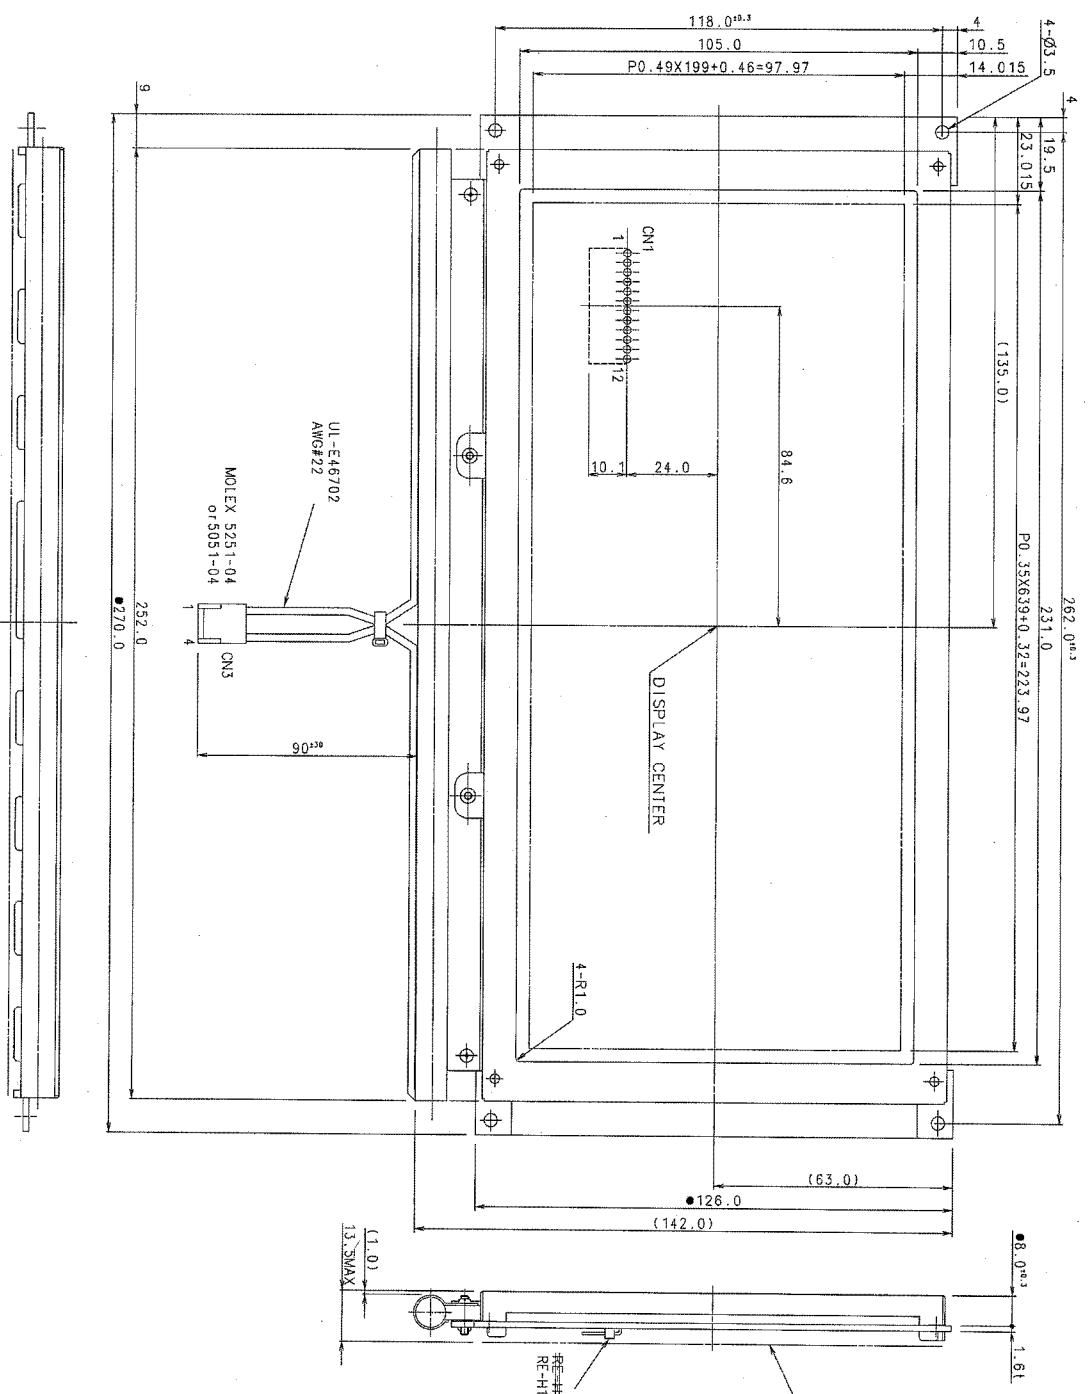

PIN ASSIGNMENT (CN1)

| PIN No. | SYGNAL |
|---------|--------|
| 1 | FLW |
| 2 | LP |
| 3 | CP |
| 4 | M |
| 5 | VADJ |
| 6 | VCC |
| 7 | VSS |
| 8 | VEE |
| 9 | DD |
| 10 | D1 |
| 11 | D2 |
| 12 | D3 |

PIN ASSIGNMENT (CN3)

| PIN No. | SYGNAL |
|---------|---------|
| 1 | FL(HOT) |
| 2 | NC |
| 3 | NC |
| 4 | FL(GND) |

NOTES

1. CFL CABLE SHOWS ONLY FRONT VIEW OF DRAWING.
2. CN1 INDICATED A HALF OF FIT ON THE CONNECTOR.
3. THE DIMENSIONS WITH THE MARK (●) ARE CONTROLLED AS A PARTICULAR CHARACTERISTIC.
4. DON'T USE MATERIAL WHICH ARE PROHIBITED BY ROHS.

| MEASURE | A | B | C |
|-----------|------|------|-------|
| 184.463 | 10.1 | 10.3 | 11 |
| 634.4230 | 10.2 | 10.3 | 11.5 |
| 2304.4500 | 10.3 | 10.8 | 12 |
| 5004 | 10.4 | 11.2 | 13 |
| ANGLE | 11.1 | 15.1 | 110.1 |