



MODEL NO: 94-22UBGC/S2

Device Number : DSE-942-038 REV. 1.0

High Performance with Reflector LEDs

ECN : _____ Page: 1/4


Features :

- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Eia std package.
- IC compatible.

Applications :

- Automotive: backlighting in dashboard and switch,
- Telecommunication: indicator and backlighting in telephone and fax.
- Indicator and backlight for audio and video equipment.
- Indicator and backlight for battery driven equipment.
- Small indicator for outdoor applications.
- Indicator and backlight in office equipment.
- Flat backlight for LED, switches and symbol.
- General use.

Package Dimension :

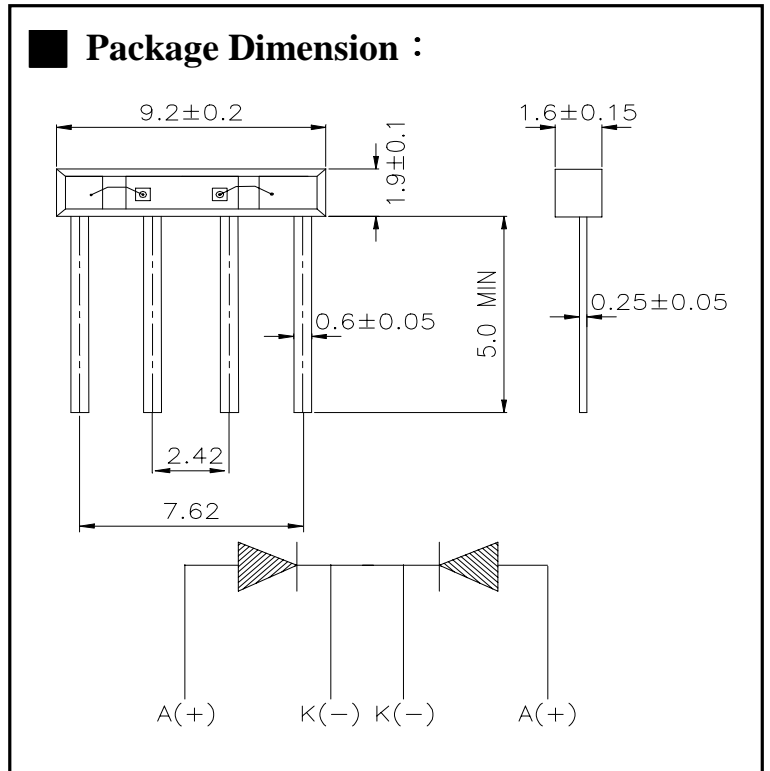

Notes :

Tolerances Unless Dimension $\pm 0.1\text{mm}$
 Angle $\pm 0.5^\circ$
 Unit = mm

PART NO	CHIP		Lens Color
	Material	Emitted Color	
94-22UBGC/S2	InGaN/SiC substrate	Super Blue Green	Water Clear

Office: NO 25,Lane.76, Chung Yang Rd., Sec.3, Tucheng, Taipei 236, Taiwan, R.O.C.

TEL: 886-2-2267-2000, 2266-9936(22 Lines)

FAX: 886-2-2267-6189

<http://www.everlight.com>



MODEL NO: 94-22UBGC/S2

Device Number : DSE-942-038 REV. 1.0

High Performance with Reflector LEDs

ECN : _____ Page: 2/4

■ **Absolute Maximum Ratings at Ta = 25°C**

Parameter	Symbol	Rating	Unit
Reverse Voltage	Vr	5	V
Forward Current	If	30	mA
Operating Temperature	Topr	-40~+85	°C
Storage Temperature	Tstg	-40~+90	°C
Soldering Temperature	Tsol	260(for 5second)	°C
Electrostatic Discharge	ESD	1000	V
Power Dissipation	Pd	120	MW
Peak Forward Current(Duty 1/10 @ 1KHZ)	If(Peak)	100	MA

■ **Electronic Optical Characteristics :**

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous intensity	Iv	-----	5	-----	mcd	If=2mA
		46	79	-----	mcd	If=20mA
Viewing Angle	2θ 1/2	-----	130	-----	deg	If=20mA
Peak Wavelength	λp	-----	502	-----	nm	If=20mA
Dominant Wavelength	λd	-----	505	-----	nm	If=20mA
Spectrum Radiation Bandwidth	Δλ	-----	30	-----	nm	If=20mA
Forward Voltage	Vf	-----	3.5	4.0	V	If=20mA
Reverse Current	Ir	-----	-----	10	μA	Vr=5V



MODEL NO: 94-22UBGC/S2

Device Number : DSE-942-038 REV. 1.0

High Performance with Reflector LEDs

ECN : _____ Page: 4/4

■ **Typical Electro-Optical Characteristic Curves**

