


High Current, Surface Mount Inductors

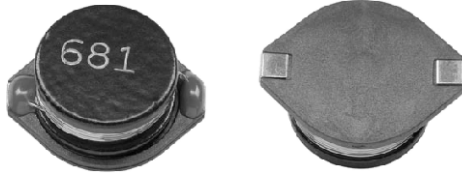

FEATURES

- High energy storage
- Low resistance
- Tape and reel packaging for automatic handling
- Compliant to RoHS directive 2002/95/EC


RoHS
COMPLIANT

ELECTRICAL SPECIFICATIONS

Inductance Range: 1.0 μ H to 1000 μ H, tested at 1.0 V_{RMS}
Inductance Tolerance: 20 %, tighter tolerance available upon request
Operating Temperature: - 40 °C to + 125 °C
Resistance to Solder Heat: 260 °C for 10 s

MECHANICAL SPECIFICATIONS

Core: Ferrite
Wire: Enamelled copper wire
Base: LCP
Terminals: Nickel bronze
Adhesive: Epoxy resin

STANDARD ELECTRICAL SPECIFICATIONS

INDUCTANCE (μ H)	TOLERANCE	TEST FREQUENCY L (kHz)	DCR MAX. (Ω)	I _{SAT} (A)	I _{RMS} (A)
1.0	± 20 %	100	0.009	20.0	8.6
2.2	± 20 %	100	0.014	16.0	7.1
3.3	± 20 %	100	0.018	14.0	6.2
5.6	± 20 %	100	0.020	12.0	5.3
10	± 20 %	100	0.031	10.0	4.3
15	± 20 %	100	0.036	8.0	4.0
22	± 20 %	100	0.047	7.0	3.5
33	± 20 %	100	0.066	5.5	3.0
47	± 20 %	100	0.086	4.5	2.6
68	± 20 %	100	0.13	3.5	2.3
100	± 20 %	100	0.19	3.0	1.8
150	± 20 %	100	0.25	2.6	1.5
220	± 20 %	100	0.38	2.4	1.2
330	± 20 %	100	0.56	1.9	1.0
470	± 20 %	100	0.85	1.4	0.82
680	± 20 %	100	1.1	1.2	0.72
1000	± 20 %	100	1.8	1.0	0.56

Notes

- Inductance drop = 10 % typ. at I_{SAT}
- Δ T = 40 °C typ. at I_{RMS}

DIMENSIONS in inches [millimeters]

A (Max.)	B (Max.)	D (Max.)	E	F	G	H	I	J
0.730 [18.54]	0.600 [15.24]	0.280 [7.11]	0.100 [2.54]	0.100 [2.54]	0.500 [12.70]	0.115 [2.92]	0.490 [12.45]	0.110 [2.79]

DESCRIPTION

IDC-7328	10 μH	± 20 %	ER	e3
MODEL	INDUCTANCE VALUE	INDUCTANCE TOLERANCE	PACKAGE CODE	JEDEC LEAD (Pb)-FREE STANDARD

GLOBAL PART NUMBER

I	D	C	7	3	2	8	E	R	1	0	0	M
PRODUCT FAMILY			SIZE			PACKAGE CODE		INDUCTANCE VALUE			TOL	



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.