


RECOMMENDED CARD LAYOUT
SCALE 2:1

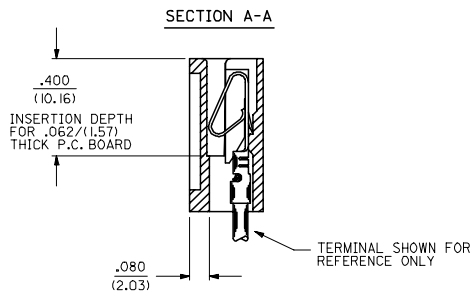

- NOTES:
1. MATERIAL: UL 94V-0 NYLON, GLOW WIRE CAPABLE.
 2. FINISH: N/A
 3. THIS PRODUCT CONFORMS TO MOLEX PROD. SPEC. 08-50.
 4. PACKAGING: BULK
 5. CONNECTOR TO BE USED WITH CRIMP TERMINALS:
2478--: 18-24 GA. WIRE, .110/(2.79) MAX INSULATION DIAMETER.
2578--: 22-26 GA. WIRE, .065/(1.65) MAX INSULATION DIAMETER.
 6. DIMENSIONS GIVEN ACROSS CENTERLINES ARE SYMMETRICAL ABOUT THOSE CENTERLINES WITHIN ONE HALF THE TOTAL TOLERANCE.
 7. PARTS LESS THAN 7 CIRCUITS ARE TO INDICATE ONLY CIRCUIT NO. 1; ALL OTHERS ARE TO IDENTIFY BOTH THE FIRST AND LAST CIRCUITS.

2574 - N * BK A

NO. OF CIRCUITS

UL 94V-0 NYLON

COLOR CODE
BK=BLACK

RIB LOCATION CODE (BETWEEN CKTS)

CODE	MOUNTING EARS	CHAMFERED SLOT	PCB THK	MOUNTING HOLES
A	NO	NO	.062	NO

OPTION CODE

1 = NONE
2 = 2-3
3 = 3-4
4 = 5-6
5 = 3-4, 5-6
6 = 4-5, 7-8
7 = 5-6, 8-9
8 = 5-6, 10-11
9 = 4-5, 7-8, 11-12
10 = 5-6, 10-11, 14-15
11 = 5-6, 10-11, 15-16
12 = 5-6, 11-12, 16-17
13 = 5-6, 11-12, 17-18
14 = 4-5, 7-8, 11-12, 15-16
15 = 4-5, 8-9, 12-13, 16-17, 20-21
16 = 5-6, 11-12, 18-19

2574-NA*					
PART NO.	ENG. NO. (SUFFIX ONLY)	NO. OF CKTS	DIM A	DIM B	DIM C
09-01-6229	-22A12BKA	22	3.562 (90.47)	3.276±.011 (83.21±0.25)	3.596 (91.34)

QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	mm	INCH	IN/MM	INCH			
▽=0	4 PLACES ± .010	± .010	DRAWN BY	DATE	4:1	INCH	
▽=0	3 PLACES ± .025	± .015	L.SCHMIDT	2005/06/03			
	2 PLACES ± 0.36	± .015	CHECKED BY	DATE	TITLE		
	1 PLACE ± 0.36	± .015	ADERR	2005/06/13	EDGE CARD CONNECTOR (3.96)/.156 CENTER CRIMP TYPE - 2574 SERIES		
	ANGULAR ±1/2°		APPROVED BY	DATE	MOLEX INCORPORATED		
			F.SMITH	2005/06/14	MATERIAL NO. DOCUMENT NO. SHEET NO.		
					SD-2574-001 1 OF 1		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			