

INDUCTIVE - - - SEA LEVEL - - 3 AMPS

RESISTIVE — — — SEA LEVEL - — 5 AMPS

MAXIMUM INRUSH — — — — — 24 AMPS

50,000 FT. — — 2.5 AMPS


50,000 FT. — — 5 AMPS

CSL

THREE PLACE (.000) ±.005

ANGLES

WEIGHT

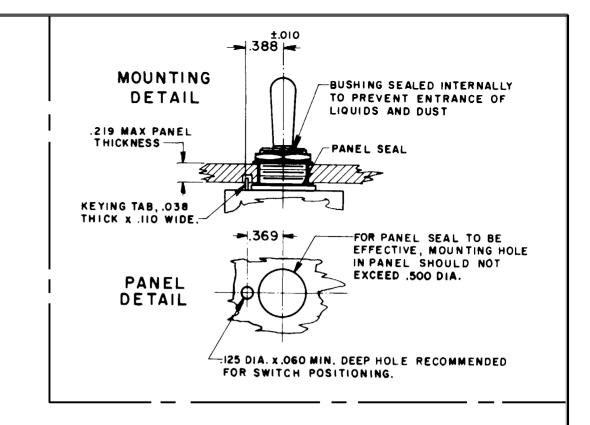

NOTES

- 1 UNIT INCLUDES CATALOG LISTING 1SM1-T BASIC SWITCH (4)
- 2 SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY
- 3 LEAD WIRES MARKED AT APPROXIMATELY 3 INCH INTERVALS WITH SWITCH NO. AND CIRCUIT IDENTIFICATION (1-N.O.) (1-COM.) (1-N.C.) (2-N.O.) ETC.

HARDWARE MAY BE FURNISHED UNASSEMBLED PER MIL-PRF-8805

CIRCUIT ARRANGEMENT

SWITCH NO.	LEVER POSITION NO. 1	LEVER POSITION NO. 2	LEVER POSITION NO. 3
SWITCH NO. 1	N.O. TO C. CIRCUIT MADE	N.C. TO C. CIRCUIT MADE	N.C. TO C. CIRCUIT MADE
SWITCH NO. 2	N.O. TO C. CIRCUIT MADE	N.C. TO C. CIRCUIT MADE	N.C. TO C. CIRCUIT MADE
SWITCH NO. 3	N.C. TO C. CIRCUIT MADE	N.C. TO C. CIRCUIT MADE	N.O. TO C. CIRCUIT MADE
SWITCH NO. 4	N.C. TO C. CIRCUIT MADE	*	N.O. TO C. CIRCUIT MADE

N.C. TO C. CIRCUIT MADE IF LEVER LAST MOVED TO LEVER POSITION 1 N.O. TO C. CIRCUIT MADE IF LEVER LAST MOVED TO LEVER POSITION 3