
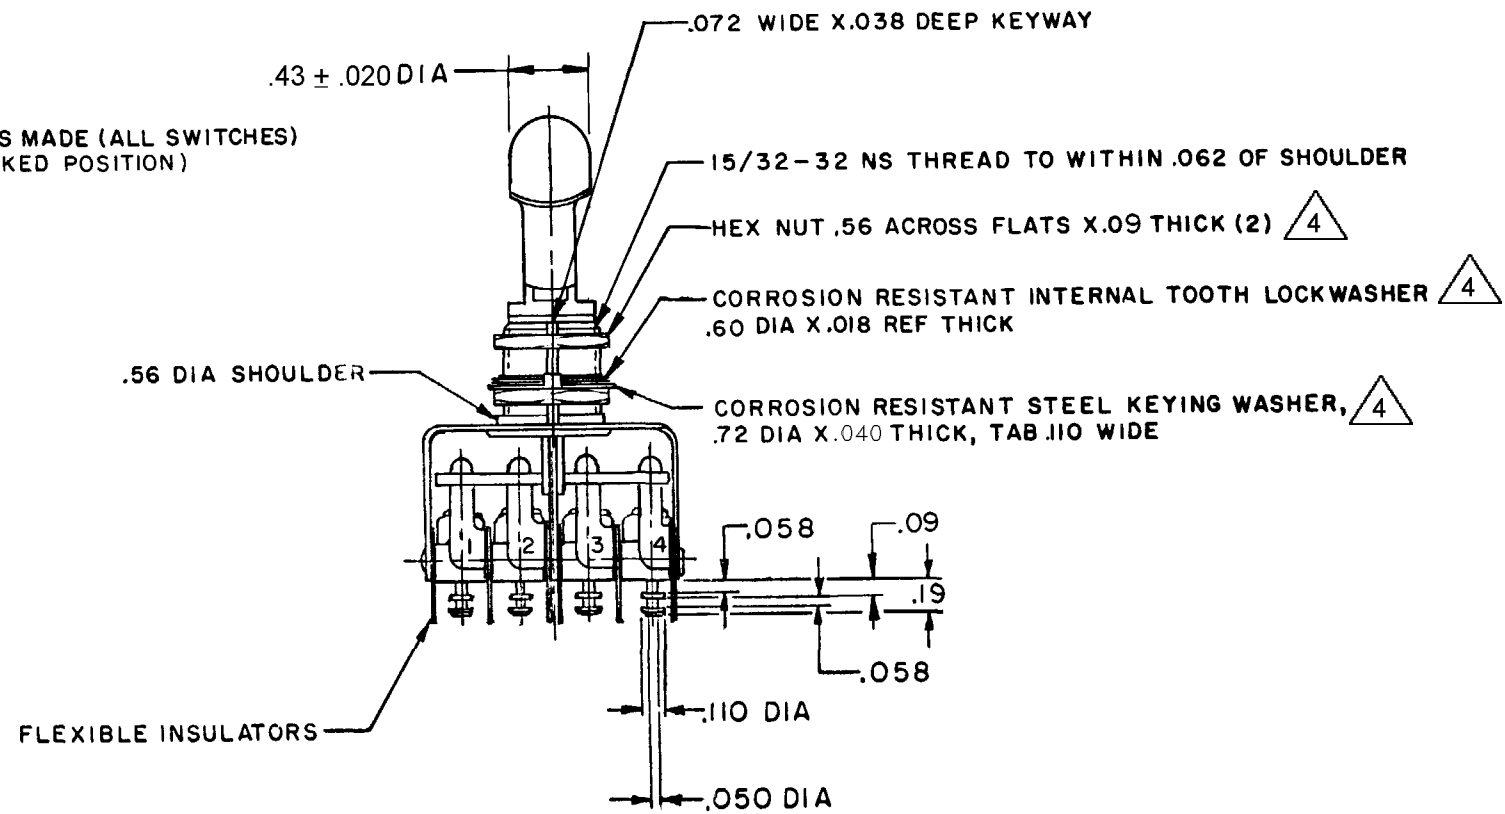


ASSEMBLY- TOGGLE SWITCH

CATALOG LISTING
23AT74-T2-G
 MILITARY P/N
 M8805/92-004

23AT74-T2-G
 PAGE 1 OF 1
 RELEASE NO. PR-1630
 DRAWING NUMBER
 ISSUE 10
 REVISIONS
 A C080402 JALA 11 APR 95
 B C093688 MPO 23 OCT 98
 C C092636 CCK 21 DEC 98
 D 207004 TSM 10 DEC 02
 E 0008575 KSR 15 OCT 04
 DRAWN
 OMW 4 FEB 71
 CHECK
 DAW 15 FEB 71
 CHECK
 AK 15 OCT 04
 CHECK
 RASTER

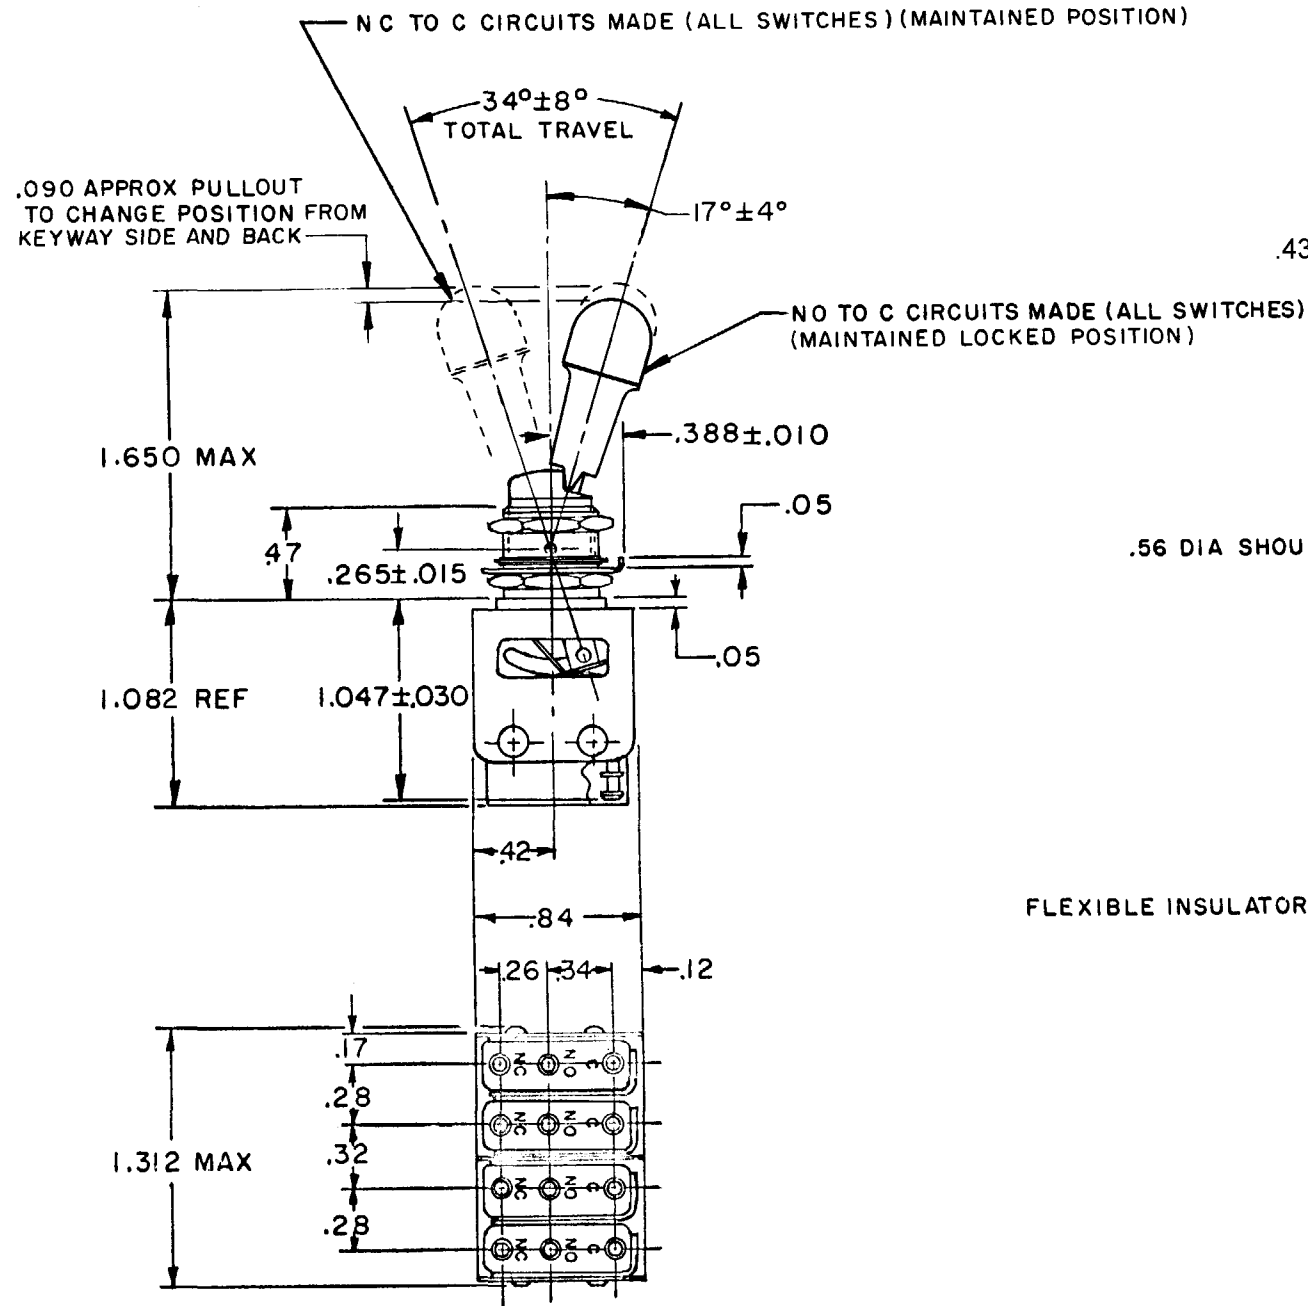

- NOTES
- 1 - UNIT INCLUDES CAT. LIST 21SM284-T2 BASIC SWITCH (MS 25085-2) (4)
 - 2 - TERMINALS ARE PLATED FOR SOLDERING
 - 3 - OPERATING POSITION SIMULTANEITY OF ALL BASIC SWITCHES MUST BE WITHIN 10° OF LEVER TRAVEL
 - 4 - HARDWARE FURNISHED ASSEMBLED WITH SWITCH OR IN PACKET PER MIL-PR-8805
 - 5 - REPLACEMENT MOUNTING HARDWARE PACKET 15PA311-AT

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS		ELECTRICAL DATA			SCALE FULL
		CONTACT ARRANGEMENT S P D T (4)			DO NOT SCALE PRINT
		SEA LEVEL 50,000 FT			UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES
		LOAD	28 VDC	115 VAC	28 VDC
		RESISTIVE	5	5	5
		INDUCTIVE	3	5	2.5
		LAMP	2.4	1.5	2.4
TOLERANCES ARE:					
ONE PLACE (.0) ±.030					
TWO PLACE (.00) ±.015					
THREE PLACE (.000) ±.005					
ANGLES ±					
WEIGHT					