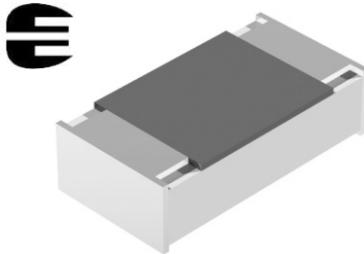


Precision Flat Chip Resistors



Thin Film Flat Chip Resistors combine the proven reliability of the professional products with an advanced level of precision and stability. Therefore they are perfectly suited for applications in the fields of test and measuring equipment together with industrial and medical electronics. The latest member of this product family size 0402 follows the ongoing trend of miniaturisation and enables precision applications in micro circuit designs.

FEATURES

- Approved according to EN 140401-801
- Thin-film technology
- Low TCR: ± 10 to ± 25 ppm/K
- Precision tolerance of value: ± 0.1 and ± 0.25 %
- Superior overall stability: class 0.1 and 0.25
- Pure Sn termination on Ni barrier layer
- Compatible with lead (Pb)-free and lead containing soldering processes
- Lead (Pb)-free and RoHS compliant



APPLICATIONS

- Automotive
- Test and measuring equipment
- Medical equipment
- Industrial equipment

METRIC SIZE

| INCH: | 0402 | 0603 | 0805 | 1206 |
|---------|----------|----------|----------|----------|
| METRIC: | RR 1005M | RR 1608M | RR 2012M | RR 3216M |

TECHNICAL SPECIFICATIONS

| DESCRIPTION | MCS 0402 | | MCT 0603 | | MCU 0805 | | MCA 1206 | | | | | | | |
|--|--|--------------|-------------------------------|--------------|-------------------------------|--------------|-----------------------------|---------------|--|--|--|--|--|--|
| Metric size | RR 1005M | | RR 1608M | | RR 2012M | | RR 3216M | | | | | | | |
| Resistance range | 100 Ω to 221 k Ω | | 39 Ω to 511 k Ω | | 39 Ω to 1.5 M Ω | | 39 Ω to 2 M Ω | | | | | | | |
| Resistance tolerance | ± 0.25 %; ± 0.1 % | | | | | | | | | | | | | |
| Temperature coefficient | ± 25 ppm/K; ± 15 ppm/K; ± 10 ppm/K | | | | | | | | | | | | | |
| Operation mode | precision | standard | precision | standard | precision | standard | precision | standard | | | | | | |
| Climatic category (LCT/UCT/days) | 10/85/56 | 55/125/56 | 10/85/56 | 55/125/56 | 10/85/56 | 55/125/56 | 10/85/56 | 55/125/56 | | | | | | |
| Rated dissipation, P_{70} ⁽¹⁾ | 0.016 W | 0.063 W | 0.032 W | 0.1 W | 0.050 W | 0.125 W | 0.1 W | 0.25 W | | | | | | |
| Operating voltage, $U_{max. AC/DC}$ | 12.5 V | 50 V | 25 V | 75 V | 35 V | 150 V | 50 V | 200 V | | | | | | |
| Film temperature | 85 °C | 125 °C | 85 °C | 125 °C | 85 °C | 125 °C | 85 °C | 125 °C | | | | | | |
| Max. resistance change at P_{70} for resistance range, $\Delta R/R$ max., after: | 100 Ω to 221 k Ω | | 39 Ω to 511 k Ω | | 39 Ω to 1.5 M Ω | | 39 Ω to 2 M Ω | | | | | | | |
| 1000 h | ≤ 0.1 % | ≤ 0.2 % | ≤ 0.1 % | ≤ 0.2 % | ≤ 0.1 % | ≤ 0.2 % | ≤ 0.05 % | ≤ 0.1 % | | | | | | |
| 8000 h | ≤ 0.2 % | ≤ 0.4 % | ≤ 0.2 % | ≤ 0.4 % | ≤ 0.2 % | ≤ 0.4 % | ≤ 0.1 % | ≤ 0.25 % | | | | | | |
| 225 000 h | ≤ 0.5 % | ≤ 1.0 % | ≤ 0.5 % | ≤ 1.0 % | ≤ 0.5 % | ≤ 1.0 % | ≤ 0.25 % | ≤ 0.5 % | | | | | | |
| Specified lifetime | 225 000 h | | 225 000 h | | 225 000 h | | 225 000 h | | | | | | | |
| Insulation voltage: | 1 min; U_{ins} continuous | | 75 V | | 100 V | | 200 V | | | | | | | |
| | | | 75 V | | 75 V | | 300 V | | | | | | | |
| | | | | | | | 75 V | | | | | | | |
| $FIT_{observed}$ | $\leq 0.1 \times 10^{-9}/h$ | | $\leq 0.1 \times 10^{-9}/h$ | | $\leq 0.1 \times 10^{-9}/h$ | | $\leq 0.1 \times 10^{-9}/h$ | | | | | | | |

Note

⁽¹⁾ The power dissipation on the resistor generates a temperature rise against the local ambient, depending on the heat flow support of the printed-circuit board (thermal resistance). The rated dissipation applies only if the permitted film temperature is not exceeded.

**12NC INFORMATION FOR HISTORICAL CODING REFERENCE ONLY**

- The resistors have a 12-digit numeric code starting with 2312.
- The subsequent 4 digits indicate the resistor type, specification and packaging; see the 12NC table.
- The remaining 4 digits indicate the resistance value:
 - The first 3 digits indicate the resistance value.
 - The last digit indicates the resistance decade in accordance with the 12NC Indicating Resistance Decade table.

Last Digit of 12NC Indicating Resistance Decade

| RESISTANCE DECADE | LAST DIGIT |
|-------------------|------------|
| 10 Ω to 99.9 Ω | 9 |
| 100 Ω to 999 Ω | 1 |
| 1 kΩ to 9.99 kΩ | 2 |
| 10 kΩ to 99.9 kΩ | 3 |
| 100 kΩ to 999 kΩ | 4 |
| 1 MΩ to 9.99 MΩ | 5 |

12NC Example

The 12 NC of a MCT 0603 resistor, value 47 kΩ and TCR 25 with ± 0.1 % tolerance, supplied in cardboard tape of 5000 units per reel is: 2312 216 74703.

| 12NC - resistors type and packaging | | | | | | | |
|-------------------------------------|------------|----------|----------------------------|------------------|--------------------|------------------|--------------------|
| DESCRIPTION | | | ORDERING CODE 2312... | | | | |
| | | | CARDBOARD TAPE ON REEL | | | | |
| TYPE | TCR | TOL. | P1 1000 UNITS | P5 5000 UNITS | PW 20 000 UNITS | E1 1000 UNITS | E0 10 000 UNITS |
| MCS 0402 | ± 25 ppm/K | ± 0.25 % | - | - | - | 261 6.... | 276 6.... |
| | | ± 0.1 % | - | - | - | 261 7.... | 276 7.... |
| | ± 15 ppm/K | ± 0.25 % | - | - | - | 262 6.... | 277 6.... |
| | | ± 0.1 % | - | - | - | 262 7.... | 277 7.... |
| | ± 10 ppm/K | ± 0.25 % | - | - | - | 263 6.... | 278 6.... |
| | | ± 0.1 % | - | - | - | 263 7.... | 278 7.... |
| MCT 0603 | ± 25 ppm/K | ± 0.25 % | 201 6.... | 216 6.... | 206 6.... | - | - |
| | | ± 0.1 % | 201 7.... | 216 7.... | 206 7.... | - | - |
| | ± 15 ppm/K | ± 0.25 % | 202 6.... | 217 6.... | 207 6.... | - | - |
| | | ± 0.1 % | 202 7.... | 217 7.... | 207 7.... | - | - |
| | ± 10 ppm/K | ± 0.25 % | 203 6.... | 218 6.... | 208 6.... | - | - |
| | | ± 0.1 % | 203 7.... | 218 7.... | 208 7.... | - | - |
| MCU 0805 | ± 25 ppm/K | ± 0.25 % | 241 6.... | 256 6.... | 246 6.... | - | - |
| | | ± 0.1 % | 241 7.... | 256 7.... | 246 7.... | - | - |
| | ± 15 ppm/K | ± 0.25 % | 242 6.... | 257 6.... | 247 6.... | - | - |
| | | ± 0.1 % | 242 7.... | 257 7.... | 247 7.... | - | - |
| | ± 10 ppm/K | ± 0.25 % | 243 6.... | 258 6.... | 248 6.... | - | - |
| | | ± 0.1 % | 243 7.... | 258 7.... | 248 7.... | - | - |
| MCA 1206 | ± 25 ppm/K | ± 0.25 % | 381 6.... | 396 6.... | 386 6.... | - | - |
| | | ± 0.1 % | 381 7.... | 396 7.... | 386 7.... | - | - |
| | ± 15 ppm/K | ± 0.25 % | 382 6.... | 397 6.... | 387 6.... | - | - |
| | | ± 0.1 % | 382 7.... | 397 7.... | 387 7.... | - | - |
| | ± 10 ppm/K | ± 0.25 % | 383 6.... | 398 6.... | 388 6.... | - | - |
| | | ± 0.1 % | 383 7.... | 398 7.... | 388 7.... | - | - |

PART NUMBER AND PRODUCT DESCRIPTION⁽¹⁾

PART NUMBER: MCT0603D4641BPW00

| | | | | | | | | | | | | | | | | | |
|--|-------------------|--|--|-----------------------------|----------------------------|---------------------------------|---|---|---|---|---|---|---|---|---|---|---|
| M | C | T | 0 | 6 | 0 | 3 | 0 | D | 4 | 6 | 4 | 1 | B | P | W | 0 | 0 |
| <hr/> | | | | | | | | | | | | | | | | | |
| MODEL/SIZE | SPECIAL CHARACTER | TCR | VALUE | TOLERANCE | PACKAGING ⁽²⁾ | SPECIAL | | | | | | | | | | | |
| MCS0402 MCT0603 MCU0805 MCA1206 | 0 = neutral | F = ± 10 ppm/K E = ± 15 ppm/K D = ± 25 ppm/K | 3 digit value 1 digit multiplier | B = ± 0.1 % C = ± 0.25 % | P1 P5 PW E1 E0 | up to 2 digits 00 = standard | | | | | | | | | | | |
| | | | MULTIPLIER 7 = *10 ⁻³ 2 = *10 ² 8 = *10 ⁻² 3 = *10 ³ 9 = *10 ⁻¹ 4 = *10 ⁴ 0 = *10 ⁰ 5 = *10 ⁵ 1 = *10 ¹ 6 = *10 ⁶ | | | | | | | | | | | | | | |

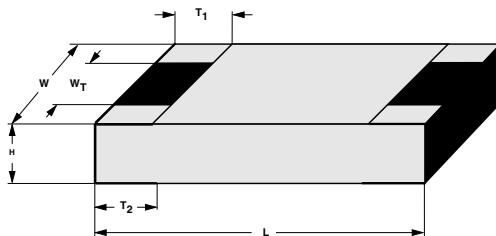
PRODUCT DESCRIPTION: MCT 0603 - 25 0.1 % PW 4K64

| | | | | | |
|--------------------------|------------------------------|--|---------------------|----------------------------|------------------------------|
| MCT | 0603 | - 25 | 0.1 % | PW | 4K64 |
| MODEL | SIZE | TCR | TOLERANCE | PACKAGING ⁽²⁾ | RESISTANCE VALUE |
| MCS MCT MCU MCA | 0402 0603 0805 1206 | ± 10 ppm/K ± 15 ppm/K ± 25 ppm/K | ± 0.1 % ± 0.25 % | P1 P5 PW E1 E0 | 47K = 47 kΩ 50R1 = 50.1 Ω |

Notes

(1) Products can be ordered using either the PRODUCT DESCRIPTION or the PART NUMBER

(2) Please refer to table PACKAGING, next page

DIMENSIONS**DIMENSIONS - CHIP** resistor types, mass and relevant physical dimensions

| TYPE | H (mm) | L (mm) | W (mm) | w _T (mm) | T ₁ (mm) | T ₂ (mm) | MASS (mg) |
|----------|-------------------|-----------------|-------------|---------------------|---------------------|---------------------|-----------|
| MCS 0402 | 0.32 ± 0.05 | 1.0 ± 0.05 | 0.5 ± 0.05 | > 75 % of W | 0.2 + 0.1/- 0.15 | 0.2 ± 0.1 | 0.6 |
| MCT 0603 | 0.45 + 0.1/- 0.05 | 1.55 ± 0.05 | 0.85 ± 0.1 | > 75 % of W | 0.3 + 0.15/- 0.2 | 0.3 + 0.15/- 0.2 | 1.9 |
| MCU 0805 | 0.45 + 0.1/- 0.05 | 2.0 ± 0.1 | 1.25 ± 0.15 | > 75 % of W | 0.4 + 0.1/- 0.2 | 0.4 + 0.1/- 0.2 | 4.6 |
| MCA 1206 | 0.55 ± 0.1 | 3.2 + 0.1/- 0.2 | 1.6 ± 0.15 | > 75 % of W | 0.5 ± 0.25 | 0.5 ± 0.25 | 9.2 |



MCS 0402, MCT 0603, MCU 0805, MCA 1206 - Precision

Precision Flat Chip Resistors

Vishay Beyschlag

| TEMPERATURE COEFFICIENT AND RESISTANCE RANGE | | | | | |
|--|---------------|--|---|---|---|
| DESCRIPTION | | RESISTANCE VALUE ⁽¹⁾ | | | |
| TCR | TOLERANCE | MCS 0402 | MCT 0603 | MCU 0805 | MCA 1206 |
| $\pm 25 \text{ ppm/K}$ | $\pm 0.25 \%$ | 100 Ω to 221 kΩ | 39 Ω to 511 kΩ | 39 Ω to 1.5 MΩ | 39 Ω to 2 MΩ |
| | $\pm 0.1 \%$ | 150 Ω to 221 kΩ | 47 Ω to 511 kΩ | 47 Ω to 1.5 MΩ | 47 Ω to 2 MΩ |
| $\pm 15 \text{ ppm/K}$ | $\pm 0.25 \%$ | 100 Ω to 150 k Ω | 39 Ω to 332 k Ω | 39 Ω to 1 M Ω | 39 Ω to 1.5 M Ω |
| | $\pm 0.1 \%$ | 150 Ω to 150 kΩ | 47 Ω to 332 kΩ | 47 Ω to 1 MΩ | 47 Ω to 1.5 MΩ |
| $\pm 10 \text{ ppm/K}^{(2)}$ | $\pm 0.25 \%$ | 100 Ω to 130 k Ω | 39 Ω to 221 k Ω | 39 Ω to 511 k Ω | 39 Ω to 1 M Ω |
| | $\pm 0.1 \%$ | 150 Ω to 130 kΩ | 47 Ω to 221 kΩ | 47 Ω to 511 kΩ | 47 Ω to 1 MΩ |

Notes

(1) Resistance values to be selected from E96 and E192 series, other values are available on request

(2) TCR 10 is specified over the temperature range from - 10 °C to 85 °C

Resistance ranges printed in bold are preferred TCR/tolerance combinations with optimized availability.

| PACKAGING | | |
|-----------|-------------------------------|------|
| MODEL | REEL | |
| | PIECES/ PAPER TAPE ON REEL | CODE |
| MCS0402 | 1000 | E1 |
| | 10 000 | E0 |
| MCT0603 | 1000 | P1 |
| | 5000 | P5 |
| | 20 000 | PW |
| MCU0805 | 1000 | P1 |
| | 5000 | P5 |
| | 20 000 | PW |
| MCA1206 | 1000 | P1 |
| | 5000 | P5 |
| | 20 000 | PW |

DESCRIPTION

Production is strictly controlled and follows an extensive set of instructions established for reproducibility. A homogeneous film of metal alloy is deposited on a high grade Al₂O₃ ceramic substrate and conditioned to achieve the desired temperature coefficient. Specially designed inner contacts are deposited on both sides. A special laser is used to achieve the target value by smoothly fine trimming the resistive layer without damaging the ceramics. A further conditioning is applied in order to stabilize the trimming result. The resistor elements are covered by a blue protective coating designed for electrical, mechanical and climatic protection. The terminations receive a final pure tin on nickel plating.

The result of the determined production is verified by an extensive testing procedure and optical inspection performed on 100 % of the individual chip resistors. Only accepted products are laid directly into the paper tape in accordance with **EN 60286-3**.

ASSEMBLY

The resistors are suitable for processing on automatic SMD assembly systems and for automatic soldering using wave, reflow or vapour phase. The encapsulation is resistant to all cleaning solvents commonly used in the electronics industry, including alcohols, esters and aqueous solutions. The suitability of conformal coatings, if applied, shall be qualified by appropriate means to ensure the long-term stability of the whole system. The resistors are RoHS compliant, the pure tin plating provides compatibility with lead (Pb)-free and lead-containing soldering processes. The immunity of the plating against tin whisker growth has been proven under extensive testing. All products comply with the CEFIC-EECA-EICTA list of legal restrictions on hazardous substances.

This includes full compatibility with the following directives:

- 2000/53/EC End of Vehicle life Directive (ELV)
- 2000/53/EC Annex II to End of Vehicle Life Directive (ELV II)
- 2002/95/EC Restriction of the use of Hazardous Substances Directive (RoHS)
- 2002/96/EC Waste Electrical and Electronic Equipment Directive (WEEE)

Solderability is specified for 2 years after production or re-qualification. The permitted storage time is 20 years.

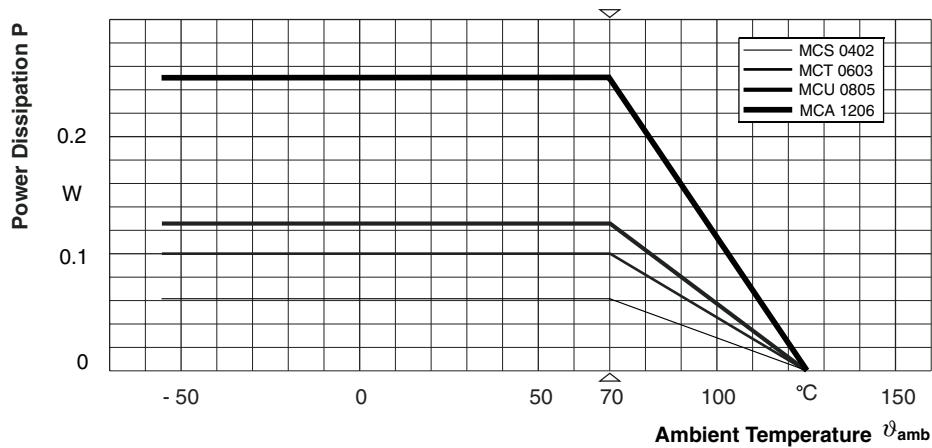
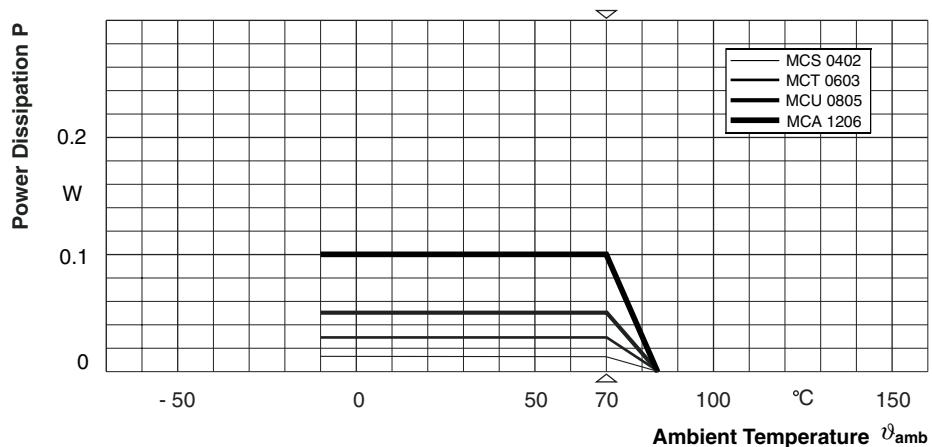
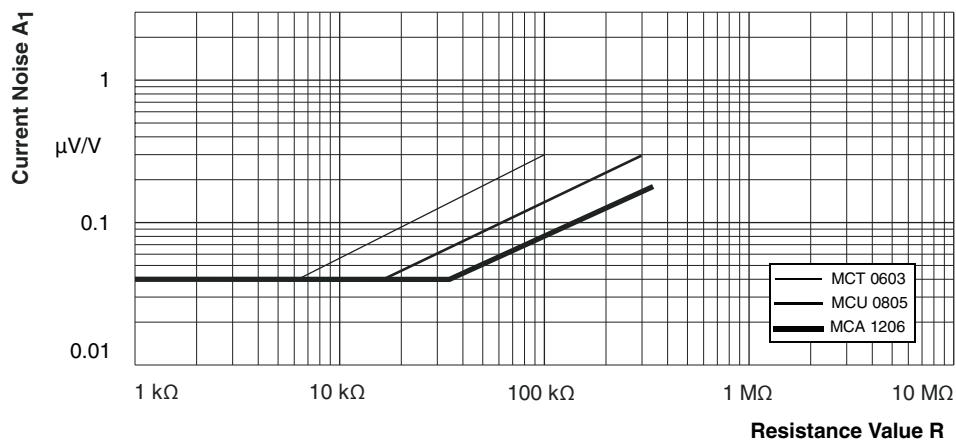
APPROVALS

The resistors are tested in accordance with **EN 140401-801** (superseding **CECC 40401-801**) which refers to **EN 60115-1** and **EN 140400**. Approval of conformity is indicated by the CECC logo on the package label.

Vishay BEYSCHLAG has achieved "**Approval of Manufacturer**" in accordance with **EN 100114-1**. The release certificate for "**Technology Approval Schedule**" in accordance with **CECC 240001** based on **EN 100114-6** is granted for the Vishay BEYSCHLAG manufacturing process.

SPECIALS

On request, resistors are available with established reliability in accordance with **EN 140 401-801 Version E**. Please refer to the special data sheet for information on failure rate level, available resistance ranges and order codes.

FUNCTIONAL PERFORMANCE

Derating - Standard Operation

Derating - Precision Operation

Current Noise A_1

In accordance with IEC 60195

TEST AND REQUIREMENTS

All tests are carried out in accordance with the following specifications:

EN 60115-1, Generic specification (includes tests)

EN 140 400, Sectional specification (includes schedule for qualification approval)

EN 140 401-801, Detail specification (includes schedule for conformance inspection)

The components are approved in accordance with the European CECC-system, where applicable. The following table contains only the most important tests. For the full test schedule refer to the documents listed above. The testing also covers most of the requirements specified by EIA/IS-703 and JIS-C-5202.

The tests are carried out in accordance with IEC 60068 and under standard atmospheric conditions in accordance with

IEC 60068-1, 5.3. Climatic category LCT/UCT/56 (rated temperature range: Lower Category Temperature, Upper Category Temperature; damp heat, long term, 56 days) is valid. Unless otherwise specified the following values apply:

Temperature: 15 °C to 35 °C

Relative humidity: 45 % to 75 %

Air pressure: 86 kPa to 106 kPa (860 mbar to 1060 mbar).

The components are mounted for testing on boards in accordance with EN 60115-1, 4.31 unless otherwise specified.

The parameters stated in the Test Procedures and Requirements table are based on the required tests and permitted limits of EN 140 401-801. However, some additional tests and a number of improvements against those minimum requirements have been included.

TEST PROCEDURES AND REQUIREMENTS

| EN 60115-1 CLAUSE | IEC 60068-2 TEST METHOD | TEST | PROCEDURE | REQUIREMENTS PERMISSIBLE CHANGE ΔR | |
|-------------------------|----------------------------------|--|---|--|---|
| | | | | STABILITY CLASS 0.1 | STABILITY CLASS 0.25 |
| | | | Stability for product types: | | |
| | | | MCS 0402 | 470 Ω to 10 kΩ | > 10 kΩ to 52.3 kΩ |
| | | | MCT 0603 | 100 Ω to 10 kΩ | 39 Ω to < 100 Ω; > 10 kΩ to 511 kΩ |
| | | | MCU 0805 | 100 Ω to 47.5 kΩ | 39 Ω to < 100 Ω; > 47.5 kΩ to 1.5 MΩ |
| 4.5 | - | Resistance | | $\pm 0.1 \% R; \pm 0.25 \% R$ | |
| | | | At 20/- 10/20 °C and 20/85/20 °C | $\pm 25 \text{ ppm/K}; \pm 15 \text{ ppm/K}; \pm 10 \text{ ppm/K}$ | |
| 4.8.4.2 | - | Temperature coefficient | $U = \sqrt{P_{70} \times R}$ or $U = U_{\max.}$; whichever is the less severe; 1,5 h on; 0,5 h off 1,5 h on; 0,5 h off 70 °C; 1000 h 70 °C; 8000 h | $\pm (0.1 \% R + 0.02 \Omega)^{(1)}$ $\pm (0.2 \% R + 0.02 \Omega)^{(1)}$ | |
| | | | | $\pm (0.2 \% R + 0.02 \Omega)^{(1)}$ $\pm (0.4 \% R + 0.05 \Omega)^{(1)}$ | |
| 4.25.1 | - | Endurance at 70 °C: precision operation mode | $U = \sqrt{P_{70} \times R}$ or $U = U_{\max.}$; whichever is the less severe; 1,5 h on; 0,5 h off 1,5 h on; 0,5 h off 70 °C; 1000 h 70 °C; 8000 h | | |
| | - | Endurance at 70 °C: standard operation mode | | | |
| 4.25.3 | - | Endurance at upper category temperature | 85 °C; 1000 h 125 °C; 1000 h | $\pm (0.1 \% R + 0.02 \Omega)$ $\pm (0.2 \% R + 0.02 \Omega)$ | $\pm (0.2 \% R + 0.02 \Omega)$ $\pm (0.25 \% R + 0.05 \Omega)$ |



| TEST PROCEDURES AND REQUIREMENTS | | | | | | |
|----------------------------------|--|--|--|---|--|--|
| EN 60115-1 CLAUSE | IEC 60068-2 TEST METHOD | TEST | PROCEDURE | REQUIREMENTS PERMISSIBLE CHANGE ΔR | | |
| | | | | STABILITY CLASS 0.1 | STABILITY CLASS 0.25 | |
| | | | Stability for product types: MCS 0402 MCT 0603 MCU 0805 MCA 1206 | 470 Ω to 10 k Ω | > 10 k Ω to 52.3 k Ω | |
| | | | | 100 Ω to 10 k Ω | 39 Ω to < 100 Ω ; > 10 k Ω to 511 k Ω | |
| | | | | 100 Ω to 47.5 k Ω | 39 Ω to < 100 Ω ; > 47.5 k Ω to 1.5 M Ω | |
| | | | | 47 Ω to 332 k Ω | 39 Ω to < 47 Ω ; > 332 k Ω to 2 M Ω | |
| 4.24 | 78 (Cab) | Damp heat, steady state | (40 \pm 2) $^{\circ}$ C; 56 days; (93 \pm 3) % RH | $\pm (0.1 \% R + 0.02 \Omega)$ | $\pm (0.25 \% R + 0.05 \Omega)$ | |
| 4.23 | 2 (Ba) 30 (Db) 1 (Aa) 13 (M) 30 (Db) | Climatic sequence: Dry heat Damp heat, cyclic Cold Low air pressure Damp heat, cyclic | UCT; 16 h 55 $^{\circ}$ C; 24 h; > 90 % RH; 1 cycle LCT; 2 h 8.5 kPa; 2 h; 25 \pm 10 $^{\circ}$ C 55 $^{\circ}$ C; 5 days; > 95 to 100 % RH; 5 cycles LCT = - 55 $^{\circ}$ C; UCT = 125 $^{\circ}$ C | $\pm (0.1 \% R + 0.02 \Omega)$ | $\pm (0.25 \% R + 0.05 \Omega)$ | |
| 4.23.2 | | | | | | |
| 4.23.3 | | | | | | |
| 4.23.4 | | | | | | |
| 4.23.5 | | | | | | |
| 4.23.6 | | | | | | |
| - | 1 (Aa) | Cold | - 55 $^{\circ}$ C; 2h | $\pm (0.05 \% R + 0.01 \Omega)$ | | |
| 4.19 | 14 (Na) | Rapid change of temperature | 30 min at LCT and 30 min at UCT; LCT = - 10 $^{\circ}$ C UCT = 85 $^{\circ}$ C; 5 cycles | $\pm (0.05 \% R + 0.01 \Omega)$ no visible damage | | |
| | | | LCT = - 55 $^{\circ}$ C; UCT = 125 $^{\circ}$ C; 1000 cycles | $\pm (0.25 \% R + 0.05 \Omega)$ no visible damage | | |
| 4.13 | - | Short time overload; precision operation mode | $U = 2.5 \times \sqrt{P_{70} \times R}$ or $U = 2 \times U_{max};$ whichever is the less severe; 5 s | $\pm (0.05 \% R + 0.01 \Omega)$ | | |
| | | | | $\pm (0.05 \% R + 0.01 \Omega)$ | | |
| 4.27 | - | Single pulse high voltage overload; standard operation mode | Severity no. 4: $U = 10 \times \sqrt{P_{70} \times R}$ or $U = 2 \times U_{max};$ whichever is the less severe; 10 pulses 10 μ s/700 μ s | $\pm (0.5 \% R + 0.05 \Omega)^2$ no visible damage | | |
| 4.37 | - | Periodic electric overload; standard operation mode | $U = \sqrt{15 \times P_{70} \times R}$ or $U = 2 \times U_{max};$ whichever is the less severe; 0.1 s on; 2.5 s off; 1000 cycles | $\pm (0.5 \% R + 0.05 \Omega)^2$ no visible damage | | |
| 4.22 | 6 (Fc) | Vibration | eEndurance by sweeping; 10 to 2000 Hz; no resonance; amplitude \leq 1.5 mm or \leq 200 m/s ² ; 6 h | $\pm (0.05 \% R + 0.01 \Omega)$ no visible damage | | |

| TEST PROCEDURES AND REQUIREMENTS | | | | | |
|--|----------------------------------|--|---|---|--|
| EN 60115-1 CLAUSE | IEC 60068-2 TEST METHOD | TEST | PROCEDURE | REQUIREMENTS PERMISSIBLE CHANGE ΔR | |
| | | | | STABILITY CLASS 0.1 | STABILITY CLASS 0.25 |
| | | | Stability for product types: | | |
| | | | MCS 0402 | 470 Ω to 10 k Ω | > 10 k Ω to 52.3 k Ω |
| | | | MCT 0603 | 100 Ω to 10 k Ω | 39 Ω to < 100 Ω ; > 10 k Ω to 511 k Ω |
| | | | MCU 0805 | 100 Ω to 47.5 k Ω | 39 Ω to < 100 Ω ; > 47.5 k Ω to 1.5 M Ω |
| 4.17.2 | 58 (Td) | Solderability | Solder bath method; SnPb40; non-activated flux (215 ± 3) °C; (3 ± 0.3) s | Good tinning ($\geq 95\%$ covered); no visible damage | |
| | | | Solder bath method; SnAg3Cu0.5 or SnAg3.5; non-activated flux (235 ± 3) °C; (2 ± 0.2) s | | |
| 4.18.2 | 58 (Td) | Resistance to soldering heat | Solder bath method; (260 ± 5) °C; (10 ± 1) s | $\pm (0.05\% R + 0.01 \Omega)$ | |
| 4.29 | 45 (XA) | Component solvent resistance | Isopropyl alcohol + 50 °C; method 2 | No visible damage | |
| 4.32 | 21 (Ue ₃) | Shear (adhesion) | RR 1005M and RR 1608M; 9 N | No visible damage | |
| | | | RR 2012M and RR 3216M; 45 N | | |
| 4.33 | 21 (Ue ₁) | Substrate bending | Depth 2 mm, 3 times | $\pm (0.05\% R + 0.01 \Omega)$ no visible damage, no open circuit in bent position | |
| 4.7 | - | Voltage proof | $U_{RMS} = U_{ins}$; 60 ± 5 s | No flashover or breakdown | |
| 4.35 | - | Flammability | IEC 60695-2-2, needle flame test; 10 s | No burning after 30 s | |
| Special requirements for type MCA 1206 | | | | | |
| 4.25.1 | - | Endurance at 70 °C: precision operation mode | $U = \sqrt{P_{70} \times R}$ or $U = U_{max.}$; whichever is the less severe 70 °C; 1000 h 70 °C; 8000 h | $\pm (0.05\% R + 0.02 \Omega)$ $\pm (0.1\% R + 0.02 \Omega)$ | |
| | - | Endurance at 70 °C: standard operation mode | $U = \sqrt{P_{70} \times R}$ or $U = U_{max.}$; whichever is the less severe 70 °C; 1000 h 70 °C; 8000 h | $\pm (0.1\% R + 0.02 \Omega)$ $\pm (0.25\% R + 0.05 \Omega)$ | |

Notes

- (1) See 4.25.1 (above): special requirements for type MCA 1206
(2) The pulse load stability of professional MFC resistors applies for precision resistors also. However, severe pulse loads are likely to jeopardise precision stability requirements.



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.