





NOTES:

1. MATERIALS AND FINISHES:
 BODY - BRASS, NICKEL PLATING
 CONTACT - BRASS, GOLD PLATING
 INSULATOR - PTFE
2. ELECTRICAL:
 A. IMPEDANCE: 50 OHM
 B. FREQUENCY RANGE: DC 0-4 GHz
 C. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.
3. MECHANICAL:
 A. DURABILITY: 500 CYCLES MIN.
 B. TEMPERATURE RANGE: - 65°C to +165°C
4. REFER. TO AMPHENOL SPEC.123-219. FOR CABLE TO CONNECTOR.
 INSTRUCTIONS AND SELECTION OF PROPER BRAID CRIMPING TOOL.

THIRD ANGLE PROJ.

REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
B	SEE SHEET 1	04-Mar-08	--	A.WU
T	REDRAWN TO UPDATE FORMAT	17-Feb-09	47239	

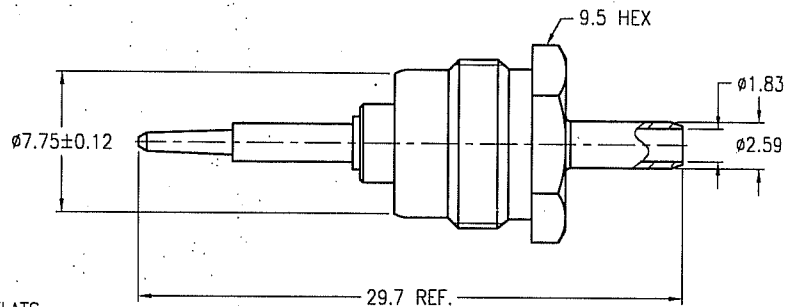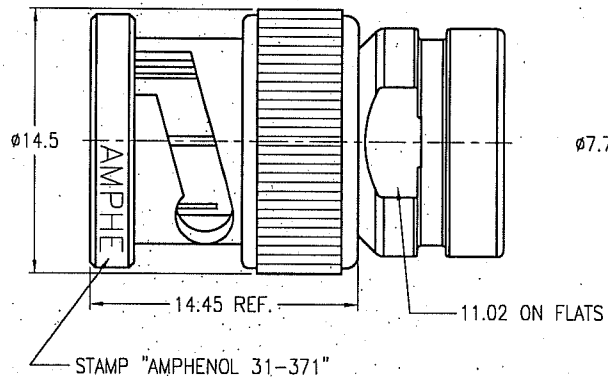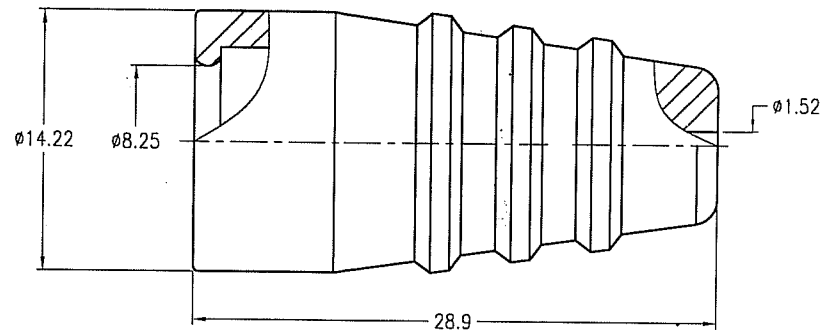

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: 0.5 - 5mm ±0.1mm 6 - 30mm ±0.2mm 30 - 120mm ±0.3mm ANGLES ±1°	MATERIAL	DRAWN SUSAN	DATE 04-Mar-08	TITLE QUICK CRIMP BNC PLUG (FOR RG-161/U, 174/U, 187/U, 188/U)		Amphenol RF	
	NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	REFERENCE	ENGINEER CISSY			DATE 04-Mar-08	Danbury CT USA, Tainan Taiwan, Shenzhen China www.amphenolrf.com
		FINISH	APPROVED ANGELA.W	DATE 04-Mar-08	SCALE: 2.5/1	SHEET 2 OF 2	DRAWING NO. 31-371
			F:\DWG\CNPD\31\371-TSZ	DWG SIZE B	CODE ID 74868	REV T	ITEM NO. 31-371 PART NO. 31-371