

SMD Aluminum Solid Capacitors with Conductive Polymer



FEATURES

- Vishay OS-CON series utilizes a polymerized organic semiconductor as electrolyte
- Features superior heat-proof characteristics compared with previously developed Vishay OS-CON series
- Particularly effective when used as surface mounting devices of the switching power supply
- Rated ripple current values are guaranteed at 105 °C
- No need to consider derating on maximum allowable ripple current
- SMD-version with base plate, lead (Pb)-free
- Compliant to RoHS Directive 2002/95/EC


RoHS
COMPLIANT


QUICK REFERENCE DATA			
DESCRIPTION	VALUE		
Operating temperature range	- 55 °C to + 105 °C		
Capacitance tolerance at 120 Hz	M: ± 20 %		
Tangent of loss angle (tan δ) at 120 Hz	values in standard ratings table		
Leakage current (µA/2 min) (or less) ⁽¹⁾	values in standard ratings table		
Equivalent series resistance (Ω), (100 kHz to 300 kHz)	values in standard ratings table		
Characteristics at high temp. and low temp.	- 55 °C	Z/Z _{20 °C}	1.0 to 1.25
	+ 105 °C	Z/Z _{20 °C}	0.75 to 1.0
Impedance ratio at 100 kHz, + 20 °C	ΔC/C	within ± 20 %	
	tan δ	≤ 1.5 x the value of tangent of loss angle	
	ESR	≤ 1.5 x the value of ESR	
	leakage current	≤ the value of leakage current	
	leakage current	≤ the value of leakage current after voltage treatment	
Endurance + 105 °C, 2000 h Rated voltage applied (25 WV to 20 V) (1000 h for A5/B6 sizes)	ΔC/C	within ± 20 %	
	tan δ	≤ 1.5 x the value of tangent of loss angle	
	ESR	≤ 1.5 x the value of ESR	
	leakage current	≤ the value of leakage current after voltage treatment	
Damp heat (steady state) (+ 60 °C, 90 % to 95 % RH, 1000 h, no voltage) (500 h for A5/B6 sizes)	ΔC/C	within ± 20 %	
	tan δ	≤ 1.5 x the value of tangent of loss angle	
	ESR	≤ 1.5 x the value of ESR	
Reverse voltage guarantee	temporary: < 20 % of the rated voltage		
	continuous: < 10 % of the rated voltage		
Solder heat resistance (VPS) ⁽²⁾ (215 °C x 90 s) or (230 °C x 60 s) (Please consult us for A5/B6 sizes)	ΔC/C	within ± 10 %	
	tan δ	≤ 1.3 x the value of tangent of loss angle	
	ESR	≤ 1.3 x the value of ESR	
	leakage current	≤ the value of leakage current after voltage treatment	

Notes

⁽¹⁾ If any doubt arises, measure the current after applying voltage (voltage treatment). Voltage Treatment: The rated voltage is applied to Vishay OS-CON (2.5 WV to 20 WV) for 120 min at 105 °C. (However, 20 V is applied to a 25 WV Vishay OS-CON).

⁽²⁾ Refer to Standard Ratings table for soldering recommendation.


DIMENSIONS in millimeters

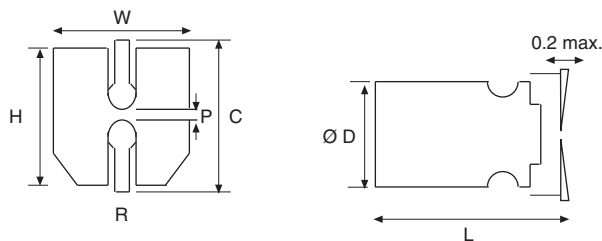

DIMENSIONS in millimeters

SIZE CODE	Ø D ± 0.5	L max.	W ± 0.2	H ± 0.2	C ± 0.2	R	P ± 0.2
A5	4.0	5.5	4.3	4.3	5.0	0.5 to 0.8	1.0
B6	5.0	6.0	5.3	5.3	6.0	0.5 to 0.8	1.4
C6	6.3	6.0	6.6	6.6	7.3	0.5 to 0.8	2.1
E7	8.0	7.0	8.3	8.3	9.0	0.5 to 0.8	3.2
F8	10.0	8.0	10.3	10.3	11.0	0.5 to 0.8	4.6
E12	8.0	12.0	8.3	8.3	9.0	0.8 to 1.1	3.2
F12	10.0	12.7	10.3	10.3	11.0	0.8 to 1.1	4.6

RECOMMENDED LAND PATTERN

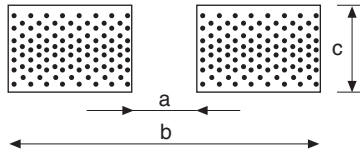

DIMENSIONS in millimeters

SIZE CODE	a	b	c
A5	1.0	6.2	1.6
B6	1.4	7.4	1.6
C6	2.1	9.1	1.6
E7	2.8	11.1	1.9
F8	4.3	13.1	1.9
E12	2.8	11.1	1.9
F12	4.3	13.1	1.9

CASE CODE LIST

WV ⁽¹⁾	(SV) ⁽²⁾	2.5	4	6.3	10	16	20	25
CAPACITANCE (μF)		(3.3)	(5.2)	(8.2)	(11.5)	(18.4)	(23)	(25)
3.3	-	-	-	-	-	A5	-	-
4.7	-	-	-	-	A5	-	-	-
6.8	-	-	-	-	A5	-	-	C6
10.0	-	-	-	-	A5	-	B6	E7
15.0	-	-	-	-	A5	B6	-	-
27.0	-	-	-	-	-	-	C6	-
22.0	-	-	-	A5	-	B6	C6	F8
33.0	-	-	A5	-	B6	-	E7	E12
39.0	-	-	B6	-	-	C6	-	-
47.0	-	-	-	B6	C6	-	E7	-
56.0	-	-	-	-	C6	E7	F8	F12
68.0	-	-	B6	-	-	-	F8	-
82.0	-	-	-	C6	-	E7	-	-
100.0	-	-	-	C6	-	F8	E12	-
120.0	-	-	-	-	E7	-	-	-
150.0	-	-	C6, E7	-	E7, F8	F8	F12	-
180.0	-	-	-	-	-	E12	-	-
220.0	-	-	-	E7, F8	-	-	-	-
270.0	-	-	-	-	E7, F8	-	-	-
330.0	-	-	E7	F8	E12	F12	-	-
470.0	-	-	-	F8, E12	-	-	-	-
560.0	-	-	E12	-	F12	-	-	-
680.0	E12	F8	-	-	-	-	-	-
820.0	-	-	-	F12	-	-	-	-
1200.0	-	F12	-	-	-	-	-	-
1500.0	F12	-	-	-	-	-	-	-

Notes

(1) WV = Rated Voltage.

(2) (SV) = Surge Voltage (at room temperature). The description contents are subject to change due to technical improvement without notice. Please ask for latest specifications for order and use.

STANDARD RATINGS

CASE CODE	PART NUMBER ⁽¹⁾	RATED VOLTAGE (V)	RATED CAPACITANCE (μF)	MAX. ESR (100 kHz to 300 kHz) (mΩ)	ALLOWABLE RIPPLE CURRENT (mA) at 100 kHz, + 105 °C	MAX. TANGENT OF LOSS ANGLE	MAX. LEAKAGE CURRENT (μA) (after 2 min)
A5	94SVP335X0016A5	16	3.3	280	590	0.07	26.4
	94SVP475X0010A5	10	4.7	260	660	0.08	23.5
	94SVP685X0010A5	10	6.8	260	660	0.09	34.0
	94SVP106X0010A5	10	10	240	670	0.10	50.0
	94SVP156X0010A5	10	15	240	670	0.10	75.0
	94SVP226X006R3A5	6.3	22	220	700	0.12	69.3
	94SVP336X0004A5	4	33	200	740	0.15	66.0

Note

(1) Part Numbers shown are for ± 20 % capacitance tolerance (X0).



SMD Aluminum Solid Capacitors
with Conductive Polymer

STANDARD RATINGS							
CASE CODE	PART NUMBER (1)	RATED VOLTAGE (V)	RATED CAPACITANCE (μF)	MAX. ESR (100 kHz to 300 kHz) (mΩ)	ALLOWABLE RIPPLE CURRENT (mA) at 100 kHz, + 105 °C	MAX. TANGENT OF LOSS ANGLE	MAX. LEAKAGE CURRENT (μA) (after 2 min)
B6	94SVP106X0020B6	20	10	170	850	0.10	100
	94SVP156X0016B6	16	15	150	920	0.10	120
	94SVP226X0016B6	16	22	150	920	0.15	176
	94SVP336X0010B6	10	33	130	990	0.15	165
	94SVP476X06R3B6	6.3	47	90	1060	0.15	148
	94SVP396X0004B6	4	39	70	1100	0.15	78
	94SVP686X0004B6	4	68	70	1100	0.15	136
C6	94SVP685X0025C6	25	6.8	80	1200	0.10	85
	94SVP226X0020C6	20	22	65	1390	0.10	88
	94SVP276X0020C6	20	27	60	1450	0.10	108
	94SVP396X0016C6	16	39	65	1390	0.10	125
	94SVP476X0010C6	10	47	60	1450	0.12	94
	94SVP566X0010C6	10	56	55	1510	0.12	112
	94SVP107X06R3C6	6.3	100	40	1810	0.12	126
	94SVP826X06R3C6	6.3	82	50	1570	0.12	103
94SVP157X0004C6	4	150	50	1620	0.12	120	
E7	94SVP106X0025E7	25	10	60	1500	0.10	125
	94SVP336X0020E7	20	33	50	1700	0.12	132
	94SVP476X0020E7	20	47	50	1700	0.12	188
	94SVP566X0016E7	16	56	50	1800	0.12	179
	94SVP826X0016E7	16	82	45	1890	0.12	262
	94SVP127X0010E7	10	120	40	2120	0.12	240
	94SVP157X0010E7	10	150	35	2560	0.12	300
	94SVP157X0004E7	4	150	35	2350	0.12	120
	94SVP337X0004E7	4	330	35	2560	0.12	264
94SVP227X06R3E7	6.3	220	35	2560	0.12	277	
F8	94SVP226X0025F8	25	22	50	2000	0.10	275
	94SVP566X0020F8	20	56	45	2200	0.12	224
	94SVP686X0020F8	20	68	45	2200	0.12	272
	94SVP107X0016F8	16	100	40	2400	0.12	320
	94SVP157X0016F8	16	150	35	2670	0.12	480
	94SVP157X0010F8	10	150	35	2670	0.12	300
	94SVP277X0010F8	10	270	30	3020	0.12	540
	94SVP227X06R3F8	6.3	220	30	3020	0.12	277
	94SVP477X06R3F8	6.3	470	25	3700	0.12	592
94SVP337X06R3F8	6.3	330	25	3300	0.12	416	
94SVP687X0004F8	4	680	25	3700	0.12	544	
E12	94SVP336X0025E12	25	33	30	2980	0.12	413
	94SVP107X0020E12	20	100	25	3260	0.15	400
	94SVP187X0016E12	16	180	22	3480	0.15	576
	94SVP337X0010E12	10	330	19	3740	0.15	660
	94SVP477X06R3E12	6.3	470	17	3960	0.15	592
	94SVP567X0004E12	4	560	16	4080	0.15	448
	94SVP687X02R5E12	2.5	680	16	4080	0.15	340
F12	94SVP566X0025F12	25	56	28	3800	0.12	700
	94SVP157X0020F12	20	150	21	4220	0.15	600
	94SVP337X0016F12	16	330	17	4580	0.15	792
	94SVP567X0010F12	10	560	15	4870	0.15	840
	94SVP827X06R3F12	6.3	820	14	5040	0.15	775
	94SVP128X0004F12	4	1200	13	5230	0.18	960
94SVP158X02R5F12	2.5	1500	13	5230	0.18	750	

Note

(1) Part Numbers shown are for ± 20 % capacitance tolerance (X0).



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Material Category Policy

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.

Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.