

SHINDENGEN

General Purpose Rectifiers

Single

D3F60

600V 3A

FEATURES

High reliability with superior moisture resistance

Applicable to Automatic Insertion

APPLICATION

Conventional Rectification

Power source(Power Supply)


Home Appliances, Office Equipment

Telecommunication, Factory Automation

OUTLINE DIMENSIONS

Case : 2F

(Unit : mm)

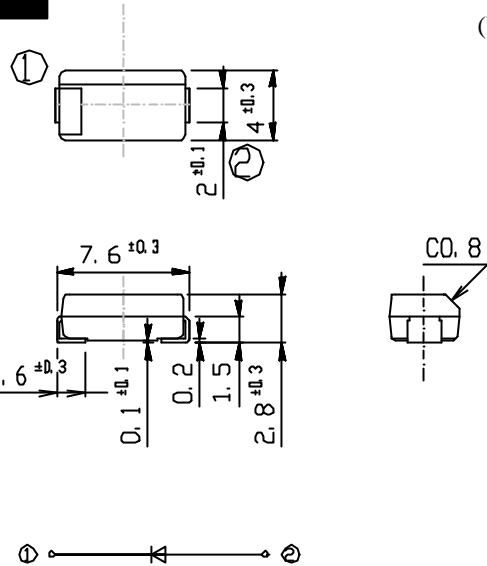

RATINGS

Absolute Maximum Ratings (If not specified $T_J=25^\circ C$)


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T_{STG}		-55 ~ 150	
Operating Junction Temperature	T_J		150	
Maximum Reverse Voltage	V_{RM}		600	V
Average Rectified Forward Current	I_F	50Hz sine wave, R-load $T_J=25^\circ C$	3	A
Peak Surge Forward Current	I_{FSM}	50Hz sine wave, Non-repetitive 1 cycle peak value, $T_J=25^\circ C$	150	A

Electrical Characteristics (If not specified $T_J=25^\circ C$)

Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V_F	$I_F=3A$, Pulse measurement	Max.1.05	V
Reverse Current	I_R	$V_R=V_{RM}$, Pulse measurement	Max.10	μA
Thermal Resistance	j_L	junction to lead	Max.23	/W
	j_A	junction to ambient, On alumina substrate junction to ambient, On glass-epoxy substrate	Max.80 Max.115	


D3F60

Forward Voltage

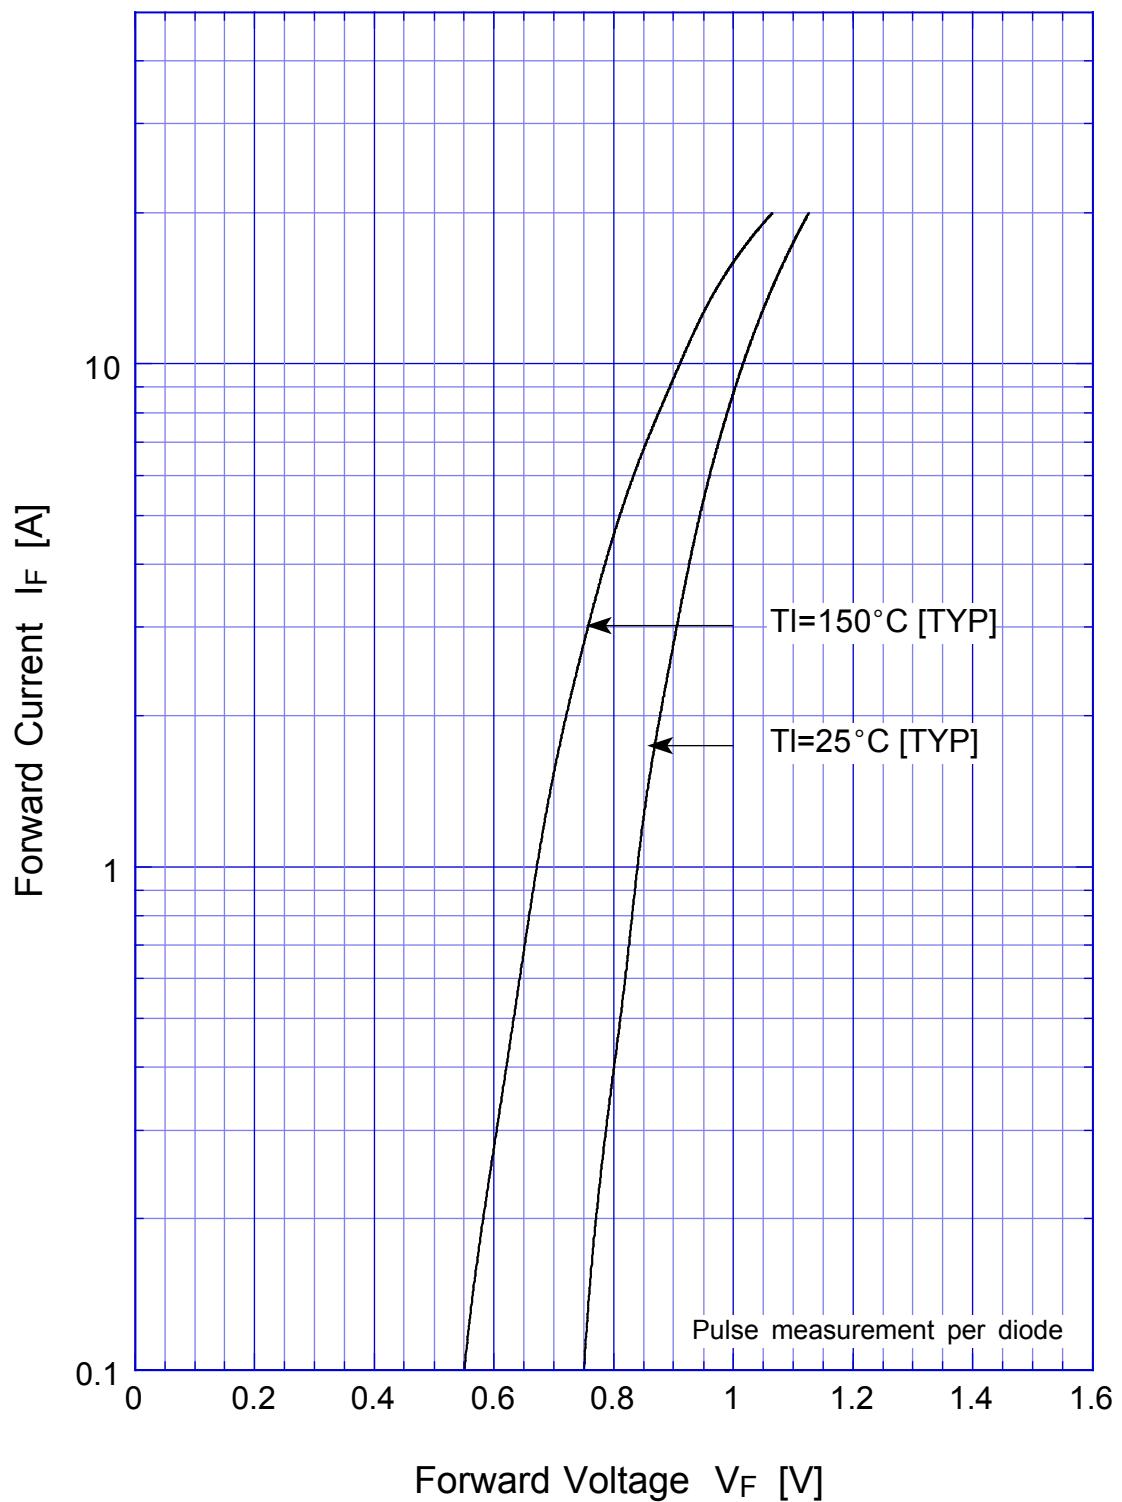


D3F60

Forward Power Dissipation

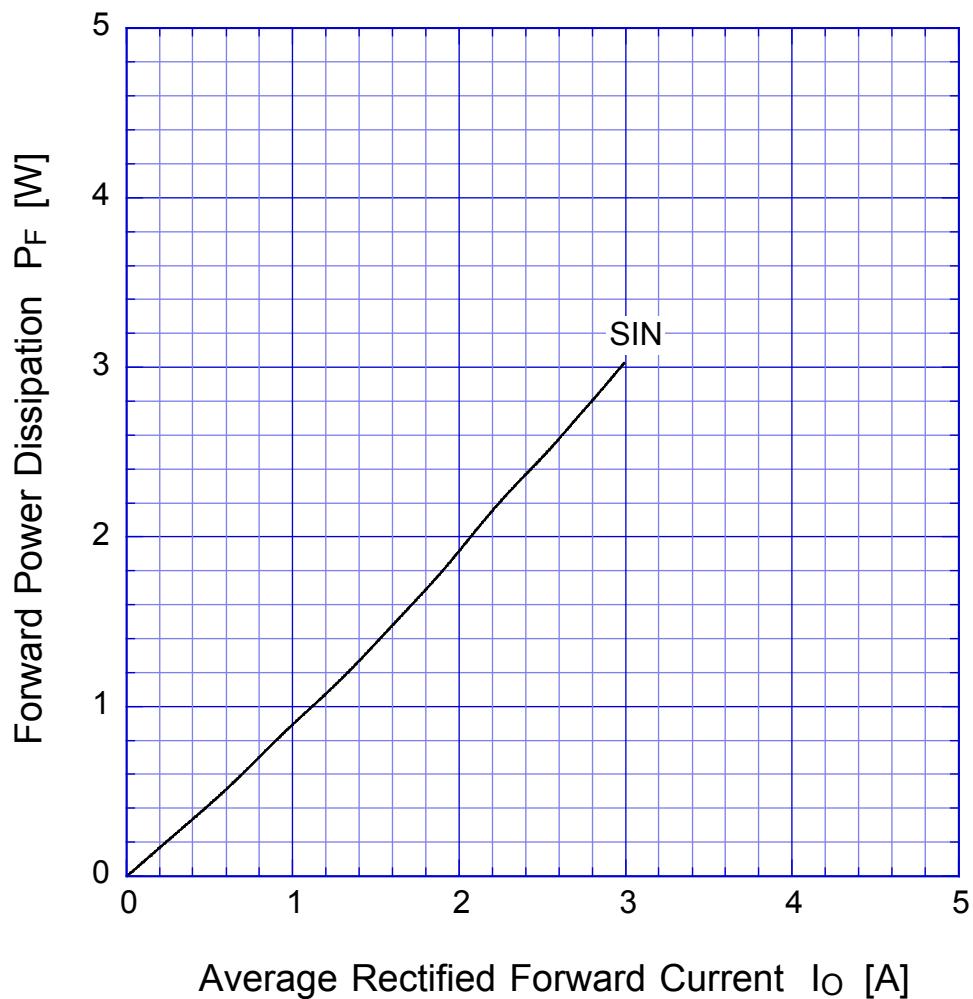

$T_j = 150^\circ\text{C}$
Sine wave

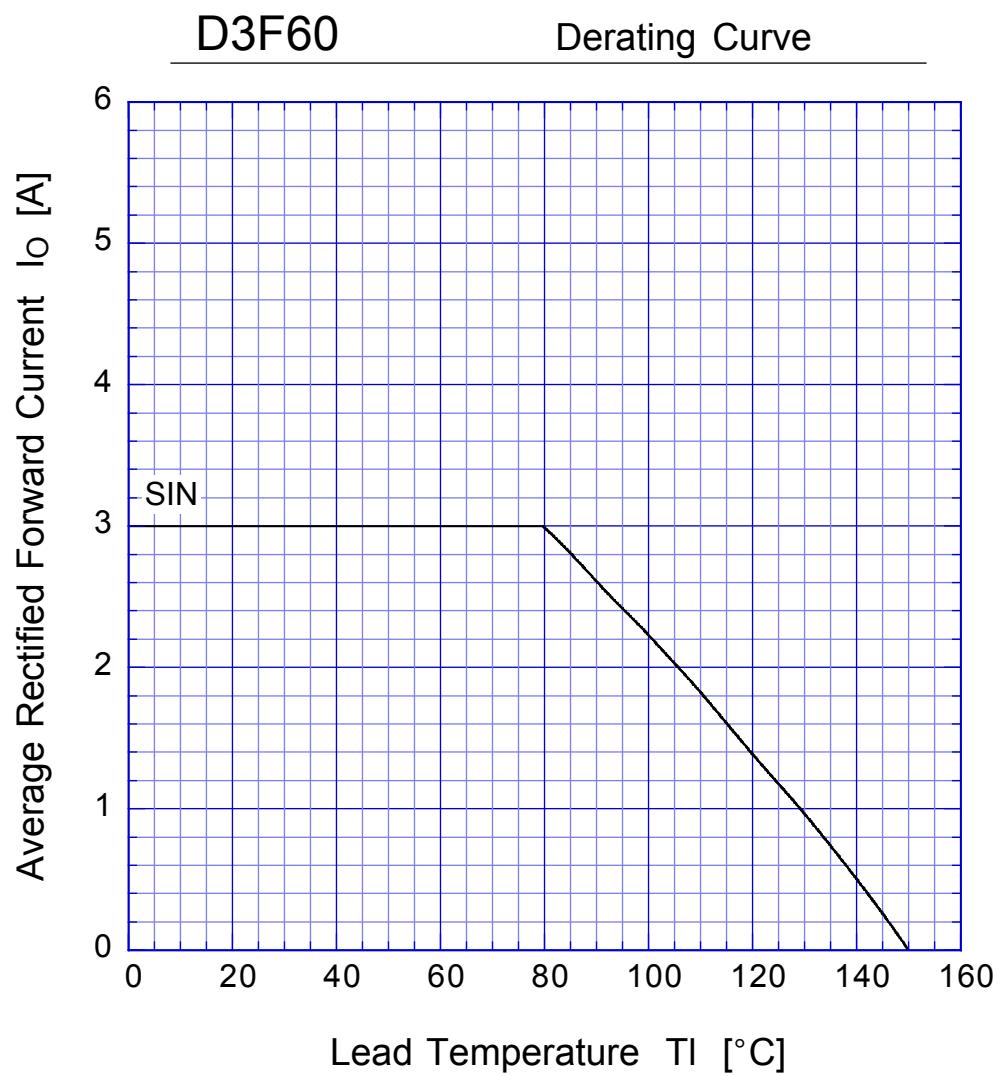

Sine wave
R-load

D3F60

Peak Surge Forward Capability

