

Customer: ALPS EUROPE DISTRIBUTION

No. KK-2006-1699

Date: Aug. 04, 2006

Attention:

Your ref. No.:

Your Part No.: EC12E2440301

SPECIFICATIONS

ALPS' ;

MODEL: EC12E2440301

Spec. No.:

Sample No.: F 3 3 0 2 0 1 2 M

RECEIPT STATUS
RECEIVED
By Date _____
Signature _____
Name _____
Title _____



Head Office
1-7, Yukigaya-otsuka-cho, Ota-ku, Tokyo, 145-8501 Japan
Phone, +81(3)3726-1211

DSG'D *K. Abe*

APP'D *S. Sato*
ENG. DEPT. DIVISION

Sales

S P E C I F I C A T I O N S

1. THIS SPECIFICATIONS APPLY TO EC12E2440301 ROTARY ENCODERS.

2. CONTENTS OF THIS SPECIFICATIONS.

F3302012M

LE2122G

3. MARKING

- MARKING ON ALL UNITS
DATE CODE

• CAUTION

Regardless of the suggested applications of these products being introduced in the specifications, when using them for equipment and devices requiring a high degree of safety, respective manufacturers will please preserve safety of the planned equipment and devices by providing necessary protective circuits and redundancy circuits and reconfirm if safety is being duly preserved.

Products being introduced in the specifications have been designed and manufactured for applications to ordinary electronic equipment and devices such as the AV equipment, electric home appliances, office machines and communications equipment. Consequently, when employing these products for applications requiring a high degree of safety and reliability such as the medical equipment, aviation and aircraft equipment, space equipment and burglar alarm equipment, the using manufacturers will please thoroughly study the proprieties of these products for the planned applications.

Although we are exerting our best efforts to maintain the quality of these products, we cannot guarantee that they will never cause short circuiting and open circuitry. Therefore, when designing an equipment or device with which the priority is given to the safety, you will please carefully study the influences to the whole equipment of a single function failure of Potentiometers and Encoders in advance to make out a fail-safe design providing.

4. 電氣特性 Electrical characteristics

項目 Item	条件 Conditions	規格 Specifications
4-1 出力信号 Output signal format	<p>1. 回転方向 Start rotational direction</p> <p>2. 回転方向 C. W.</p> <p>3. 回転方向 A(A-C端子) A(Terminal A-C)</p> <p>4. 回転方向 B(B-C端子) B(Terminal B-C)</p> <p>5. 回転方向 A(A-C端子) A(Terminal A-C)</p> <p>6. 回転方向 B(B-C端子) B(Terminal B-C)</p>	<p>A, B2 信号の電圧出力は、標準値 <math>\lt; 1.0 \text{ V}</math> 未満とする。</p> <p>出力信号は OFF の状態にあり、ON の状態にあり、(標準値は 1.5V 未満) の電圧を出力する。</p> <p>2 Phase-different signals (Signal A, signal B) details shown in <math>\text{Fig. 1}</math>. The output position will always be aligned with phase-different signals. The output position will always be aligned with phase-different signals.</p>
4-2 分解能 Resolution	1. 回転方向 Number of pulses in 360° rotation	標準値 24bit/360° 24 pulses/360° for each pulse
4-3 スイッチング特性 Switching characteristics	<p>1. 回転方向 Measurement shall be made under the condition as follows.</p> <p>2. Test circuit</p>	<p>下図の回路 <math>\text{Fig. 2}</math> を用い、標準値 360°/S の条件下で測定する。</p> <p>Measurement shall be made under the condition as follows.</p> <p>2) Test circuit</p>
4-4 出力信号 Output signal	<p>1. 回転方向 ON/OFF area</p> <p>2. 回転方向 ON/OFF area</p>	<p>ON/OFF 領域 : 標準値 1.5V-3.5V の範囲とする。</p> <p>ON/OFF 領域 : 標準値 3.5V 以上の範囲とする。</p> <p>(note) ON/OFF area : The area which the voltage is 1.5V or less.</p> <p>ON/OFF area : The area which the voltage is 3.5V or more.</p>

SYMB	DATE	APPD	CHKD	DSBD	ALPS ELECTRIC CO., LTD.
		K. ITO	Y. KANZAKI	H. MIURA	12 形回転式エンコーダ
					12mm Size Rotary Encoder
					DOCUMENT NO.
					F3302012M
					(2/8)

1. 一般事項 General

1-1 適用範囲 SCOPE
2. 0mm 以内の寸法に適用する。この規格は、12mm 以内の寸法に適用する。この規格は、12mm 以内の寸法に適用する。この規格は、12mm 以内の寸法に適用する。

1-2 標準状態 Standard atmospheric conditions
Unless otherwise specified, the standard range of atmospheric conditions for making measurements and tests is as follows:
 温度 Ambient temperature : 15°C to 35°C
 湿度 Relative humidity : 25% to 85%
 気圧 Air pressure : 86kPa to 106kPa

1-3 動作温度範囲 Operating temperature range : -10°C to +70°C

1-4 保存温度範囲 Storage temperature range : -40°C to +85°C

2. 構造 Construction

2-1 寸法 Dimensions
Refer to attached drawing


3. 定格 Rating

3-1 定格電圧 Rated voltage : D. C. 5V

3-2 定格電流 (負荷時) Operating current (resistive load)
 各端子ごとの電流 : 0.5mA (MAX) 5mA, MIN 0.5mA
 共通端子 : 1mA (MAX) 10mA, MIN 0.5mA

SYMB	DATE	APPD	CHKD	DSBD	ALPS ELECTRIC CO., LTD.
		K. ITO	Y. KANZAKI	H. MIURA	12 形回転式エンコーダ
					12mm Size Rotary Encoder
					DOCUMENT NO.
					F3302012M
					(1/8)

項目 Item	条件 Conditions	仕様 Specifications
2) 音響ノイズ (Sliding noise) (Bounce)	3-TONの条件下、5V以上の電圧変動を繰り返して、1.5V以上の電圧変動を繰り返して、音響ノイズを発生させる。音響ノイズは、音響ノイズ発生時に発生する。 When the bounce has code-ON time (less than 1ms between chatter times t_1 or t_2), the voltage change shall be regarded as a part of chatter. When the code-ON time between 2 bounces is less than 1ms, they are regarded as 1 linked bounce.	1.5V以上 1.5V以上
3) 音響ノイズ Sliding noise	3-TONの条件下、5V以上の電圧変動を繰り返して、1.5V以上の電圧変動を繰り返して、音響ノイズを発生させる。音響ノイズは、音響ノイズ発生時に発生する。 When the bounce has code-ON time (less than 1ms between chatter times t_1 or t_2), the voltage change shall be regarded as a part of chatter. When the code-ON time between 2 bounces is less than 1ms, they are regarded as 1 linked bounce.	3.5V以上 3.5V以上
4-1) 電気的強度 Dielectric strength	端子-電源間A、C、50Vの電圧を、(リ-クエリ) A voltage of 50V A.C. shall be applied for 1min between individual terminals and bracket. (Leak current limit)	漏れ電流は0.1mA以下 Without arcing or breakdown
4-2) 絶縁抵抗 Insulation resistance	端子-電源間D、C、50Vの電圧を、(リ-クエリ) A voltage of 50V D.C. is applied between individual terminals and bracket.	端子-電源間D、C、10MΩ以上 Between individual terminals and bracket: 10MΩ MIN
4-3) 圧差 Pressure-difference	測定時、測定速度は一定である。測定は、一定速度で回転させ、圧差を測定する。測定速度は、1000rpm以上である。 Measurement shall be made under the condition which the shaft is rotated in constant speed. <Fig. 4> 測定方向 CV	<Fig. 4> 20V 1000rpm以上 測定方向 CV

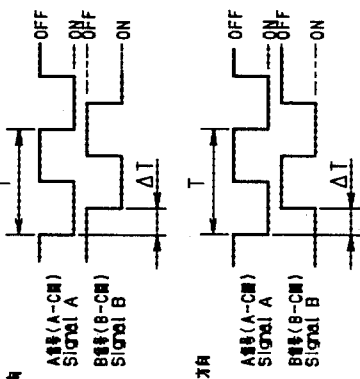

項目 Item	条件 Conditions	仕様 Specifications
2) 音響ノイズ (Sliding noise) (Bounce)	3-TONの条件下、5V以上の電圧変動を繰り返して、1.5V以上の電圧変動を繰り返して、音響ノイズを発生させる。音響ノイズは、音響ノイズ発生時に発生する。 When the bounce has code-ON time (less than 1ms between chatter times t_1 or t_2), the voltage change shall be regarded as a part of chatter. When the code-ON time between 2 bounces is less than 1ms, they are regarded as 1 linked bounce.	1.5V以上 1.5V以上
3) 音響ノイズ Sliding noise	3-TONの条件下、5V以上の電圧変動を繰り返して、1.5V以上の電圧変動を繰り返して、音響ノイズを発生させる。音響ノイズは、音響ノイズ発生時に発生する。 When the bounce has code-ON time (less than 1ms between chatter times t_1 or t_2), the voltage change shall be regarded as a part of chatter. When the code-ON time between 2 bounces is less than 1ms, they are regarded as 1 linked bounce.	3.5V以上 3.5V以上
4-1) 電気的強度 Dielectric strength	端子-電源間A、C、50Vの電圧を、(リ-クエリ) A voltage of 50V A.C. shall be applied for 1min between individual terminals and bracket. (Leak current limit)	漏れ電流は0.1mA以下 Without arcing or breakdown
4-2) 絶縁抵抗 Insulation resistance	端子-電源間D、C、50Vの電圧を、(リ-クエリ) A voltage of 50V D.C. is applied between individual terminals and bracket.	端子-電源間D、C、10MΩ以上 Between individual terminals and bracket: 10MΩ MIN
4-3) 圧差 Pressure-difference	測定時、測定速度は一定である。測定は、一定速度で回転させ、圧差を測定する。測定速度は、1000rpm以上である。 Measurement shall be made under the condition which the shaft is rotated in constant speed. <Fig. 4> 測定方向 CV	<Fig. 4> 20V 1000rpm以上 測定方向 CV

ALPS ELECTRIC CO., LTD.

APPD.	CHKD.	DSGD.	TITLE
APR. 22, '99	APR. 22, '99	APR. 22, '99	12 形回転スイッチ
K. ITO			Y. KANZAKI
H. MIURA			DOCUMENT NO.
F3302012M			(3/8)

項目 Item	条件 Conditions	仕様 Specifications
5-1) 回転トルク Total rotational torque	(リ-クエリ) (Applied for with-detent type)	360 (T7/TVX) 360 (ETC/less)
5-2) リ-クエリトルク Detent torque	(リ-クエリ) (Applied for with-detent type)	31.2mNm
5-3) リ-クエリトルク Number and position of detents		24 24 detents (7°ずつ、15°×3°) (Step angle: 15°×3°)
5-4) 軸受心許容推し Push-pull strength of shaft	軸受心許容推しは、100N以内である。(PCB実装用) Push and pull static load of BCN shall be applied to the shaft in the axial direction for 10S. (After soldering of the PC board)	100N以内 No excessive rotational feeling And electrical characteristics shall be satisfied.
5-5) 軸受心許容引 Terminal strength	軸受心許容引は、100N以内である。 A static load of 3N shall be applied to the tip of terminals for 10S in any direction.	100N以内 Without excessive play in terminals or poor contact.
5-6) 軸受心許容引 Start play in axial direction	軸受心許容引は、100N以内である。 Push and pull static load of 3N shall be applied to the shaft in the axial directions.	0.4mmp-max 0.4mm-p MAX

ALPS ELECTRIC CO., LTD.

APPD.	CHKD.	DSGD.	TITLE
APR. 22, '99	APR. 22, '99	APR. 22, '99	12 形回転スイッチ
K. ITO			Y. KANZAKI
H. MIURA			DOCUMENT NO.
F3302012M			(4/8)

項目 Item	条件 Conditions	基準 Specifications
5-1 溶接抵抗 Resistance to soldering heat	7.10 "Soldering conditions" Specified by the clause 7 "soldering conditions".	電気的性質、機械的性質等異常の こと、また、異常な劣化現象を おこすこと。 Electrical characteristics shall be satisfied. No mechanical abnormality such as a excessive play. 電圧降下、劣化現象等95% 以上の劣化を認めないこと。 A new uniform coating of solder shall cover a minimum of 95% of the surface being immersed.

ALPS ELECTRIC CO., LTD.

APPRO.	CHKD.	DSGD.	TITLE
APR. 22, '99	APR. 22, '99	APR. 22, '99	12 形回転式エコーダ 12mm Size Rotary encoder
K. ITO			Y. KANZAKI
H. MIURA			DOCUMENT NO.
F 3302012M			(5/8)

6. 耐久試験 Endurance characteristics.


項目 Item	条件 Conditions	基準 Specifications
5-1 回転寿命 Rotational life	速度約600~1000/Hの速度で、30,000回回転試験を行なう。 The shaft of encoder shall be rotated to 30,000 cycles at a speed of 600-1000/H without electrical load, after which measurements shall be made.	チタリング t ₁ , t ₂ ≤ 5MS ノイズ t ₃ ≤ 3MS Chattering t ₁ , t ₂ ≤ 5MS Bounce t ₃ ≤ 3MS クランク部が570°を越えてお り、残った部品は残ったままに 残る。
5-2 耐熱性 Damp heat	湿度40±2°C、湿度90~95%の環境中で240±10時間試験後、常温、湿度中1.5時間試験する。 The encoder shall be stored at a temperature of 40±2°C with relative humidity of 90% to 95% for 240±10H in a thermostatic chamber. And then the encoder shall be subjected to standard atmospheric conditions for 1.5H, after which measurement shall be made.	湿度試験(4.1~4.5及び5.1) を満足すること。 Specifications in clause 4.1~4.5 and 5.1 shall be satisfied.
5-3 耐熱性 Dry heat	湿度85±3°Cの環境中で240±10時間試験後、常温、湿度中1.5時間試験する。 The encoder shall be stored at a temperature of 85±3°C for 240±10H in a thermostatic chamber. And then the encoder shall be subjected to standard atmospheric conditions for 1.5H, after which measurements shall be made.	
5-4 耐寒性 Cold	湿度-40±3°Cの環境中で240±10時間試験後、常温、湿度中1.5時間試験する。 The encoder shall be stored at a temperature of -40±3°C for 240±10H in a thermostatic chamber. And then the encoder shall be subjected to standard atmospheric conditions for 1.5H, after which measurement shall be made.	
5-5 落下試験 Free Falling	60cmの高さより落下試験を行うが5ビニールを巻いたコンクリート製または自由落下させる。 The encoder shall be fallen freely at any posture from 60cm height to the concrete floor covered with vinyl-tile, after which measurement shall be made.	落下試験、衝撃試験等が 規定(4.1~4.5及び5.1)を 満足すること。 No excessive deformation or damage. (Except the deformation of terminal.) And specifications in clause 4.1~4.5 and 5.1 shall be satisfied.
5-6 振動試験 Vibration	10~55~10Hzの振幅を1分/1分(10分/10分)をX、Y、Z、各方向に2時間試験する。 The following vibration shall be applied to the encoder, after which measurement shall be made: The entire frequency range, from 10Hz to 55Hz and return to 10Hz, shall be traversed in 1 min. Amplitude (total excursion): 1.5mm. This motion shall be applied for a period of 2H in each of 3 mutually perpendicular axes (A total of 6H).	振動試験(4.1~4.5及び5.1) を満足すること。 Specifications in clause 4.1~4.5 and 5.1 shall be satisfied.

ALPS ELECTRIC CO., LTD.

APPRO.	CHKD.	DSGD.	TITLE
APR. 22, '99	APR. 22, '99	APR. 22, '99	12 形回転式エコーダ 12mm Size Rotary encoder
K. ITO			Y. KANZAKI
H. MIURA			DOCUMENT NO.
F 3302012M			(6/8)

9. その他、取扱い上の注意 PRECAUTIONS IN USE

- 9-1. 保管は常温、少量の湿度及び腐食性ガスを避けて下さい。
During operation, storage in high temperature and humidity, and in corrosive gas, should be avoided
- 9-2. エンコーダ - 01A、A スカウト用期の動作に当たっては動作スピード、サンプリングタイム、マスキングタイム等について、取扱書の上巻を参照して下さい。
In case of pulse count process design, operational speed, sampling time, and masking time etc should be taken into the consideration.
Please check above matter at first on your circuit for the secure reason.
- 9-3. 本製品がフリップフロップ回路でA相はOFF状態で空転を繰り返すので、ソフト起動前A相基準で設計して下さい。
A phase should be design criterion prior to B phase.
Because A phase has steady off signal at detent position.
- 9-4. エンコーダ - 01A、A スカウト用期の動作に当たっては動作スピード、サンプリングタイム、マスキングタイム等について、取扱書の上巻を参照して下さい。
For your pulse count design, it should be considered to add C/R filter on your circuit shown as below.

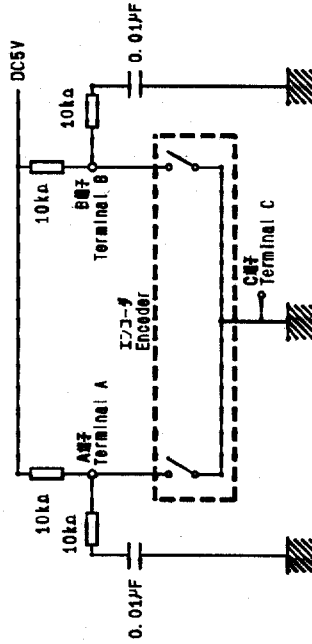

- 9-5. 本製品は本機に直接接続する場合は、A、B、C各相に異相が発生する可能性がありますので、製品に直接接続する場合は必ずしも注意してください。
Care must be taken not to expose this product to water or dew to prevent possible problems in pulse output wave form.
- 9-6. 医療用器械、器具への本製品の使用は避けて下さい。
Please avoid to medical instrument because this encoder is audio use.

SYMB		DATE	APPD	CHKD	USED
TITLE		12 形回転式エンコーダ		12mm SIZE ROTARY ENCODER	
APPD.		CHKD.	USED.	DOCUMENT NO.	
APR. 22, '99		APR. 22, '99	APR. 22, '99	F3302012M (8/8)	
K. ITO		Y. KAWAZAKI H. MIURA			


SYMB		DATE	APPD	CHKD	USED
TITLE		12 形回転式エンコーダ		12mm SIZE Rotary encoder	
APPD.		CHKD.	USED.	DOCUMENT NO.	
APR. 22, '99		APR. 22, '99	APR. 22, '99	F3302012M (7/8)	
K. ITO		Y. KAWAZAKI H. MIURA			

7. 半田付けの条件 Soldering conditions
7-1 半田付けの条件 Manual soldering

- 温度 : 350°C 以内
Bit temperature of soldering iron : 350°C or less.
Application time of soldering iron : within 3s.
- 7-2 半田付けの条件 Dip soldering
温度 : 260°C ± 5°C 以内
Printed wiring board: Single-sided copper clad laminate board with thickness of 1.6mm.
- 7-3 半田付けの条件 Flux
温度 : 260°C ± 5°C 以内
Flux shall be applied to the board using a bubble forming type flux.
The board shall be cooled in the middle of its thickness.
Flux shall not come into contact with the component side surface.



- 7-4 半田付けの条件 Preheating
温度 : 100°C 以上
Preheating time: within 1 min.
- 7-5 半田付けの条件 Soldering
温度 : 260°C ± 5°C 以内
Solder temperature: 260°C ± 5°C.
Immersion time: within 3s

8. 半田付けの条件 Note for soldering method.
8-1 半田付けの条件 Please avoid soldering on upper surface (the component side surface) of the PCB board as shown below




8-2 半田付けの条件 Please avoid cleaning of PCB board because the flux used during the dip soldering process may enter the encoder and cause poor contact


商標の位置は任意
THE DIRECTION OF
TRADE MARK IS OPTIONAL

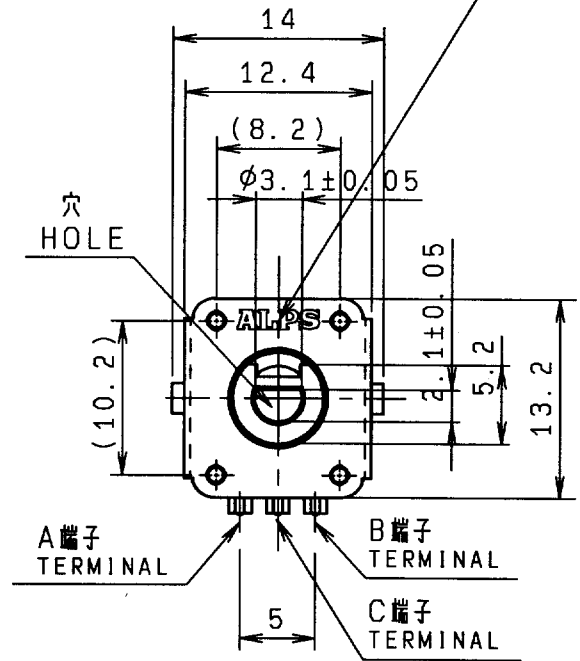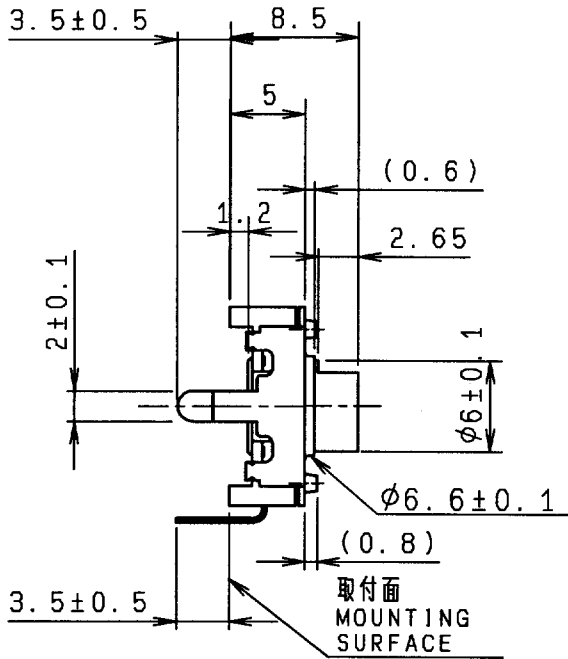

取付寸法図 (許容差±0.1)
*挿入側より見た図
P.W.B. MOUNTING DETAIL
(TOLERANCE±0.1)
VIEWED FROM MOUNTING SIDE

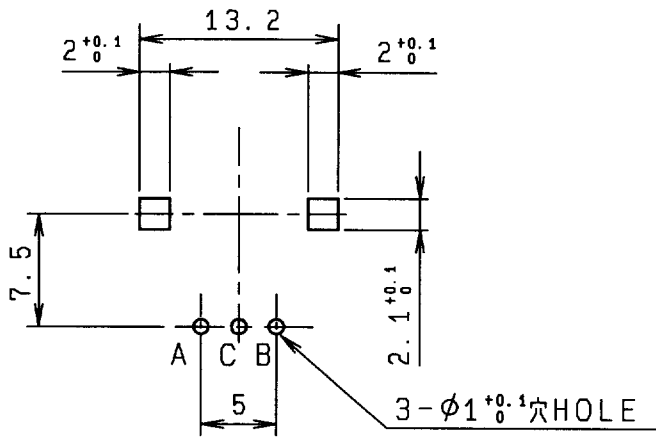

端子先端詳細図 (10:1)
DETAIL OF TERMINALS



基板板厚 t=1.6mm
P.C.B.

指定なき部分の許容差 TOLERANCES UNLESS OTHERWISE SPEC	
L ≤ 10	±0.3
10 < L < 100	±0.5
100 ≤ L	±0.8
角度 ANGULAR DIMENSION	±5°

			24パルス SHAFT COLOR:BLACK		L=8.5 伏形 JOGクリック
PART NO.	NAME	MATERIAL NAME / CODE	FINISH		
ALPS ELECTRIC CO., LTD.					
		DSGD. セツケイ2 H. MIURA '95-12-08	SCALE 2:1		
		CHKD. M. ENDOU '95-12-08		TITLE 12形 薄形エンコーダー	
		APPD. S. MIZOBUTI '95-12-08	UNIT mm	DOCUMENT NO. LE2122G	
SYMB	DATE	APPD	CHKD	DSGD	