

# Limitron® Fast-Acting Fuses


KLM

13/32" x 1 1/2"

600Vac/dc, 1/0 - 30A



### Dimensions - in

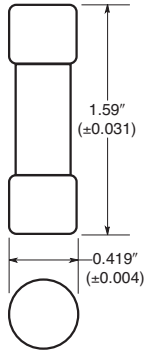

**Catalog Symbol:** KLM  
**Fast-Acting** 1/0-30A

**Agency Information:** CE; UL Listed Std. 248-14, File E19180, Guide JDYX; CSA Certified, C22.2 No. 248.14, Class 1422-01, File 53787

**Interrupting Ratings:** 100kA at 600Vac  
50kA at 600Vdc

- A full range DC midget fuse.
- Melamine tube.
- Nickel-plated brass endcaps.


### Electrical Ratings (Catalog Symbol and Amps) IR 100kAac/50kAdc

KLM-1/0	KLM-3/0	KLM-1-1/2	KLM-5	KLM-12	KLM-30
KLM-1/2	KLM-1	KLM-2	KLM-6	KLM-15	-
KLM-3/4	KLM-3/4	KLM-3	KLM-8	KLM-20	-
KLM-1	KLM-1	KLM-4	KLM-10	KLM-25	-

### Designed To:


Fuses:	Designed to:
KLM 1/0 thru 30	Carry 110% of rating for 4 hours
	AC Opens at 135% of rating within 1 hour
	AC Maximum Interrupting Rating of 100kA at 600Vac
	DC Maximum Interrupting Rating of 50kA at 600Vdc,

### Time-Current Characteristic Curves—Total Clearing

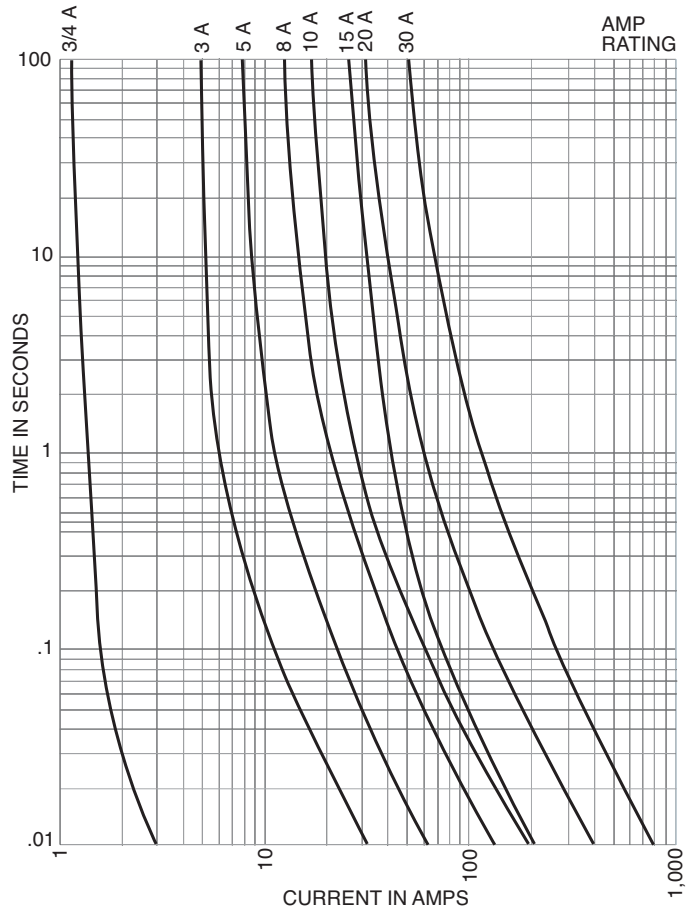

### Carton Quantity and Weight

Ampere Ratings	Carton Qty.	Weight	
		Lbs.	Kg.
0-30	10	0.187	0.088



**Recommended fuseblocks/fuseholders for 13/32" x 1-1/2" fuses**  
See Data Sheets listed below

- Open fuseblocks - 1104, 2104
- Finger-safe fuseholders - 1109, 1102, 1103, 1157, 2053
- Panel-mount fuseholders - 2114, 2113, 2108, 2112, 2109, 2140
- In-line fuseholders - 2127, 2126

The only controlled copy of this Data Sheet is the electronic read-only version located on the Cooper Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Cooper Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Cooper Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.