

# E.S.D NOISE CLIPPING DIODES

## NNCD3.3C to NNCD12C

### ELECTROSTATIC DISCHARGE NOISE CLIPPING DIODES (150 mW TYPE)

This product series is a diode developed for E.S.D (Electrostatic Discharge) noise protection. Based on the IEC1000-4-2 test on electromagnetic interference (EMI), the diode assures an endurance of no less than 30 kV, thus making itself most suitable for external interface circuit protection.

Type NNCD3.3C to NNCD12C Series are into 2PIN Ultra Super Mini Mold Package having allowable power dissipation of 150 mW.

#### FEATURES

- Based on the electrostatic discharge immunity test (IEC1000-4-2), the product assures the minimum endurance of 30 kV.
- Based on the reference supply of the set, the product achieves a series over a wide range (15 product name lined up).

#### APPLICATIONS


- External interface circuit E.S.D protection.
- Circuits for Waveform clipper, Surge absorber.

#### MAXIMUM RATINGS ( $T_A = 25\text{ }^\circ\text{C}$ )

Power Dissipation	P	150 mW	
Surge Reverse Power	$P_{RSM}$	85 W ( $t_r = 10\text{ }\mu\text{s}$ 1 pulse)	Fig. 6
Junction Temperature	$T_j$	150 $^\circ\text{C}$	
Storage Temperature	$T_{stg}$	-55 $^\circ\text{C}$ to +150 $^\circ\text{C}$	

#### PACKAGE DIMENSIONS

(in millimeters)

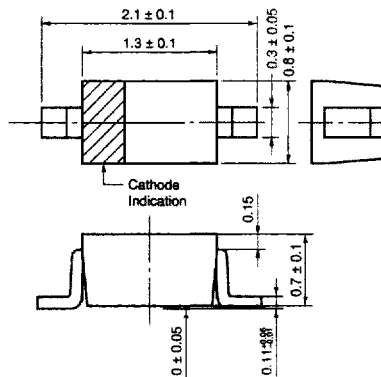

ELECTRICAL CHARACTERISTICS (T<sub>A</sub> = 25 °C)

Type Number	Breakdown Voltage <sup>Note 1</sup> V <sub>BR</sub> (V)			Dynamic Impedance <sup>Note 2</sup> Z <sub>Z</sub> (Ω)		Reverse Leakage I <sub>R</sub> (μA)		Capacitance C <sub>i</sub> (pF)		E.S.D Voltage (kV)	
	MIN.	MAX.	I <sub>r</sub> (mA)	MAX.	I <sub>r</sub> (mA)	MAX.	V <sub>R</sub> (V)	TYP.	TEST CONDITION	MIN.	TEST CONDITION
NNCD3.3C	3.10	3.50	5	130	5	20	1.0	220	V <sub>R</sub> = 0 V f = 1 MHz	30	C = 150 pF R = 330 Ω (IEC1000-4-2)
NNCD3.6C	3.40	3.80	5	130	5	10	1.0	210		30	
NNCD3.9C	3.70	4.10	5	130	5	10	1.0	200		30	
NNCD4.3C	4.00	4.49	5	130	5	10	1.0	180		30	
NNCD4.7C	4.40	4.92	5	130	5	10	1.0	170		30	
NNCD5.1C	4.82	5.39	5	130	5	5	1.5	160		30	
NNCD5.6C	5.29	5.94	5	80	5	5	2.5	140		30	
NNCD6.2C	5.84	6.55	5	50	5	5	3.0	120		30	
NNCD6.8C	6.44	7.17	5	30	5	2	3.5	110		30	
NNCD7.5C	7.03	7.87	5	30	5	2	4.0	90		30	
NNCD8.2C	7.73	8.67	5	30	5	2	5.0	90		30	
NNCD9.1C	8.53	9.58	5	30	5	2	6.0	90		30	
NNCD10C	9.42	10.58	5	30	5	2	7.0	80		30	
NNCD11C	10.40	11.60	5	30	5	2	8.0	70		30	
NNCD12C	11.38	12.64	5	35	5	2	9.0	70		30	

Notes 1. Tested with pulse (40 ms)

2. Z<sub>Z</sub> is measured at I<sub>r</sub> give a small A.C. signal.

TYPICAL CHARACTERISTICS (T<sub>A</sub> = 25 °C)

Fig. 1 POWER DISSIPATION vs. AMBIENT TEMPERATURE

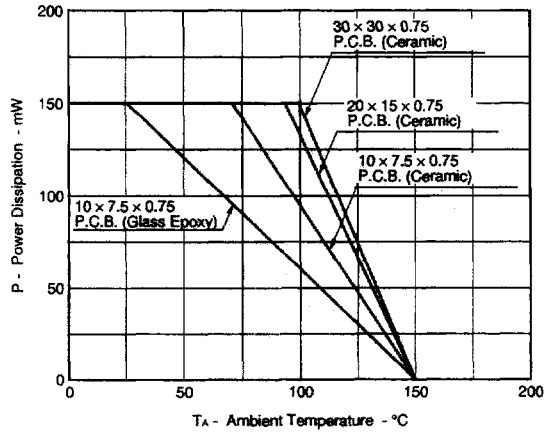


Fig. 2 I<sub>r</sub> - V<sub>BR</sub> CHARACTERISTICS

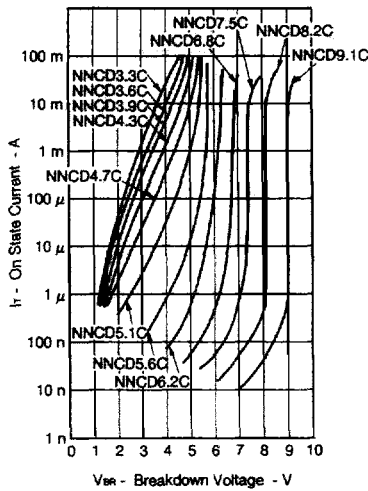


Fig. 3 I<sub>r</sub> - V<sub>BR</sub> CHARACTERISTICS

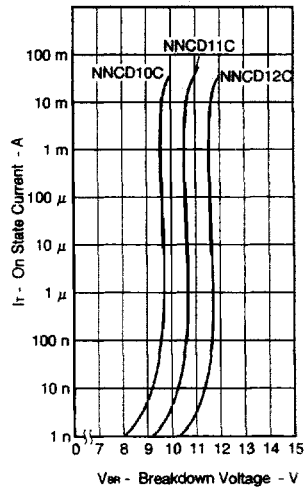


Fig. 4 Z<sub>z</sub>-I<sub>r</sub> CHARACTERISTICS

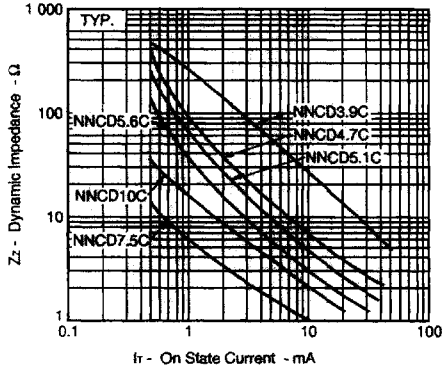


Fig. 5 TRANSIENT THERMAL IMPEDANCE



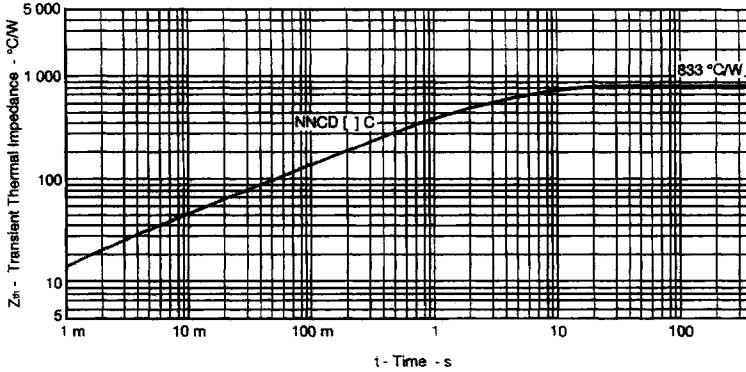


Fig. 6 SURGE REVERSE POWER RATING

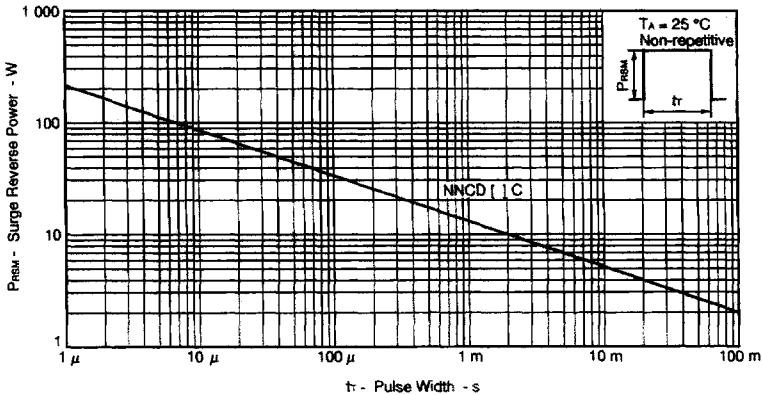

Sample Application Circuits

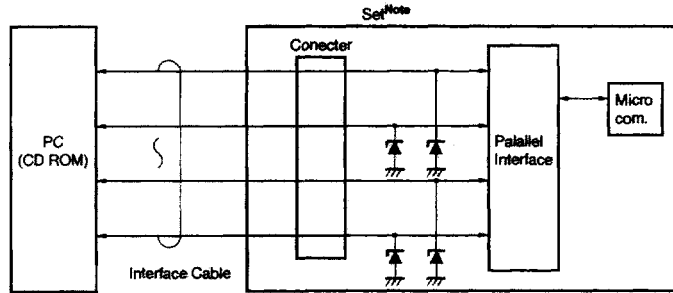

**Note** Set  
Printer, P.D.C, T.V Game etc.