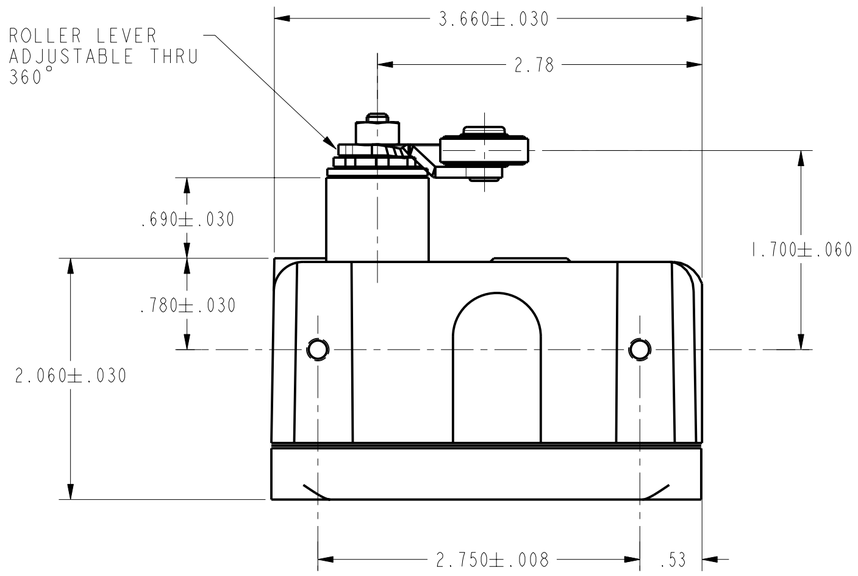

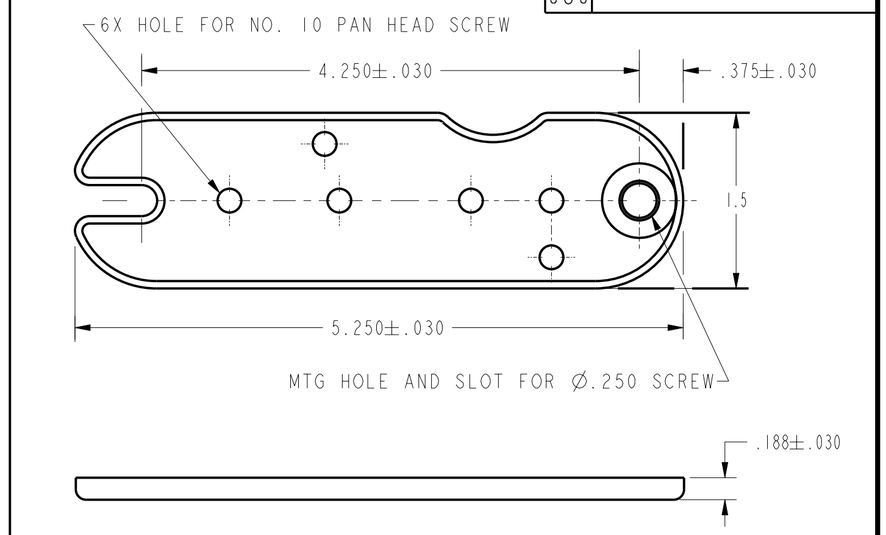

MOUNTING BRACKET AND 2X 10-32 UNF X (.250) PAN HEAD SCREW FURNISHED UNASSEMBLED

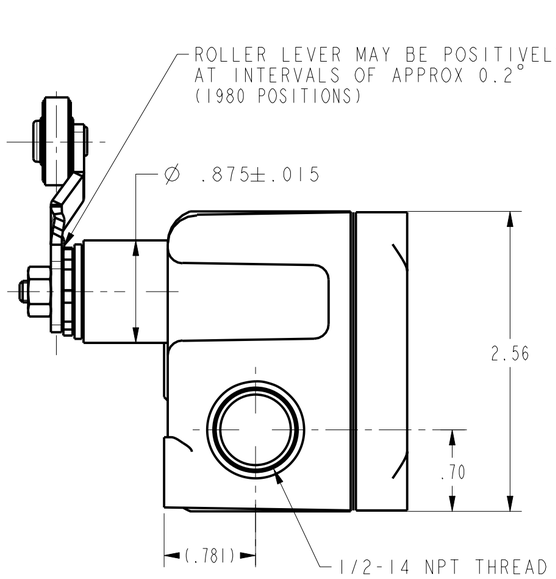

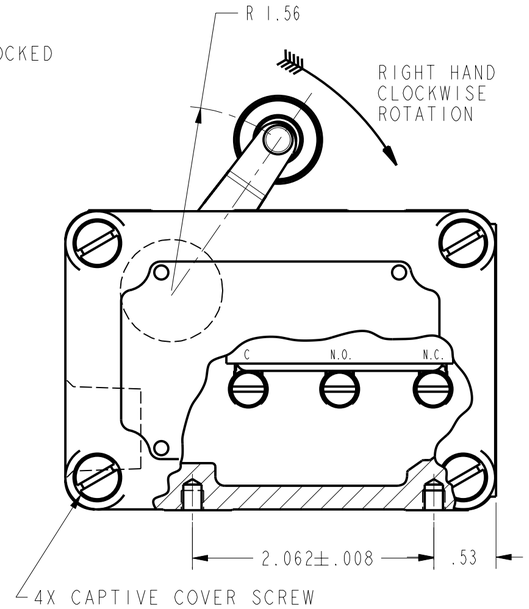

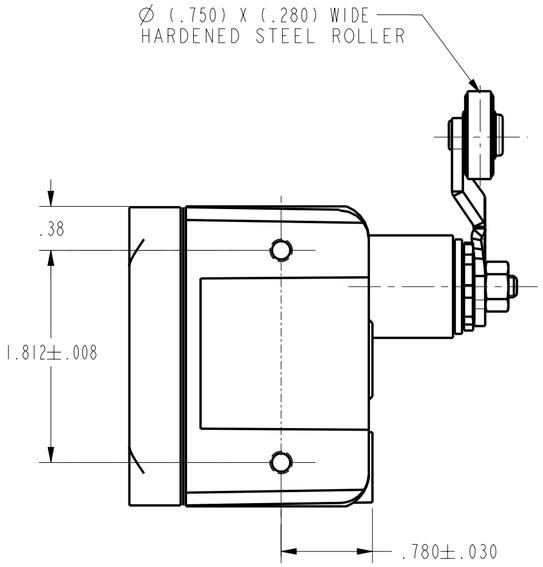

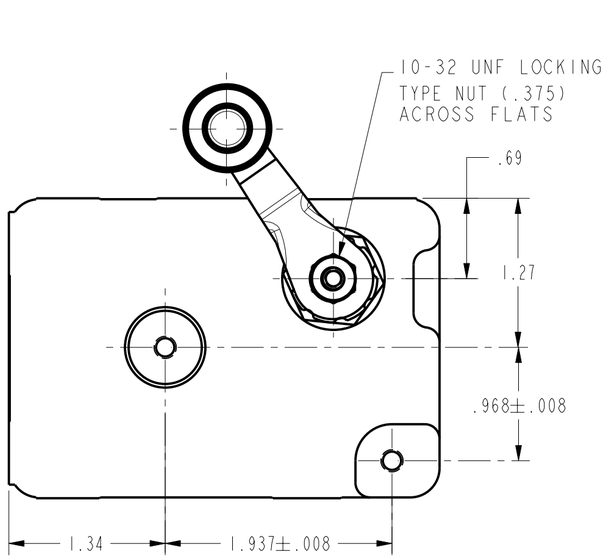

NOTES
1 - 8X MOUNTING SCREW HOLES, 10-32 UNF-2B THREADS X (.219) DEEP
2 - 8-32 UNC X (.219) BINDING HEAD TERMINAL SCREWS AND CUPWASHERS
3 - SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE

CHARACTERISTICS	ELECTRICAL DATA
OPERATING FORCE ----- 1/2 - 1 1/4 LB	CONTACT ARRANGEMENT S P D T
RELEASE FORCE ---------- 1/4 LB MIN	L96 15A 125, 250 OR 480 VAC 1/8HP 125 VAC, 1/4HP 250 VAC 1/2A 125 VDC, 1/4A 250 VDC
PRETRAVEL ---------- .219 MAX 8°	
DIFFERENTIAL TRAVEL --- .007 MAX 1/4°	
DO NOT OVERTRAVEL MORE THAN ---- 90°	
SWITCH - BASIC REPLACEMENT — BZ-2R-P4	

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

MICRO SWITCH a Honeywell Division
FED. MFG. CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING
OP-AR

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACES	(.00)	±.015
THREE PLACES	(.000)	±.005
ANGLES		±

WEIGHT

REVISIONS
A CO-94982 KAG 4MAY99

PTC/CAD 2D
DRAWN KAG 06MAY99
CHECK JAF 06MAY99
CHECK
CHECK
M OP-AR PAGE 1 OF 1
RELEASE NO.
DRAWING NUMBER
ISSUE 27
REPLACES