



DRG No. <b>CP32903</b>	ISSUE <b>1</b>	TYPE No. OXL/CLH/100/-/FLxx/-		DIM. IN: MILLIMETRES	ODC:QS:40077 ISSUE 1 DO NOT SCALE	THIS DRAWING AND THE COPYRIGHT AND DESIGN RIGHT THEREIN ARE THE PROPERTY OF OXLEY DEVELOPMENTS CO. Ltd. AND MUST NOT BE REPRODUCED OR DISCLOSED TO A THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF THE COMPANY.	ISS	MODIFICATION	DATE

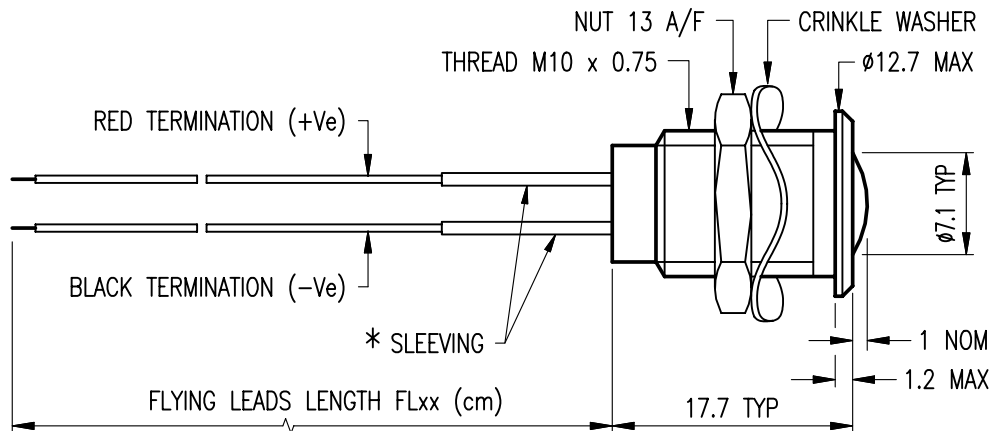

\* FOR 110V : BLUE SLEEVING ON RED TERMINATION &  
BLACK SLEEVING ON BLACK TERMINATION  
FOR 240V : BLACK SLEEVING ON BOTH TERMINATIONS

MATERIALS AND FINISHES	
DESCRIPTION	MATERIAL, FINISH
BODY	BRASS BS2874 CZ121. BLACK CHROMED
LENS	POLYCARBONATE
TERMINATIONS	FLYING LEADS
NUT	ALUMINIUM ALLOY
WASHER	BeCu. TIN PLATED

OPERATING AND STORAGE TEMPERATURE : -40°C to 85°C

ELECTRICAL CHARACTERISTICS										
	AlGaAs RED		YELLOW		GREEN		BLUE		WHITE	
LUMINOUS INTENSITY TYPICAL (mcd AT RATED VOLTAGE)	110	240	110	240	110	240	110	240	110	240
FORWARD CURRENT (mA) TYP	300	150	250	125	315	160	300	150	250	125
REVERSE VOLTAGE (V) MAX	5	2.5	5	2.5	5	2.5	5	2.5	5	2.5
	RATED VOLTAGE									

MOUNTING DETAILS
MOUNTING HOLE : Ø10.15±0.1
RECOMMENDED MOUNTING TORQUE : 1Nm
CHASSIS THICKNESS : 1.5mm (Min)

MATERIAL AS STATED	DRAWN <i>Simon Russam</i>
FINISH AS STATED	CHECKED <b>T. DAVIS</b>
PLATING AS STATED	APPROVED DA01/322
TOLERANCE AS STATED	DATE 2 APR 01
REMARKS	
TITLE LOW PROFILE HIGH INTENSITY LED INDICATOR LAMP	

WHEN ORDERING, PLEASE STATE TYPE NUMBER, SPECIFYING FLYING LEAD LENGTH, OPERATING VOLTAGE & LED COLOUR

e.g OXL/CLH/100/110/FL20/BLUE

OPERATING VOLTAGE REQUIRED (110Vac or 240Vac) —  
FLYING LEAD LENGTH IN cm —  
LED COLOUR REQUIRED (AlGaAs RED, YELLOW, GREEN, BLUE or WHITE) —



Tel. 01229 582621  
Fax. 01229 585090

**OXLEY DEVELOPMENTS COMPANY LTD.**

Ulverston  
Cumbria LA12 9QG  
ENGLAND

SCALE 2 : 1	TYPE No. OXL/CLH/100/-/FLxx/-	DRG No. <b>CP32903</b>	ISSUE <b>1</b>
----------------	----------------------------------	---------------------------	-------------------