


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

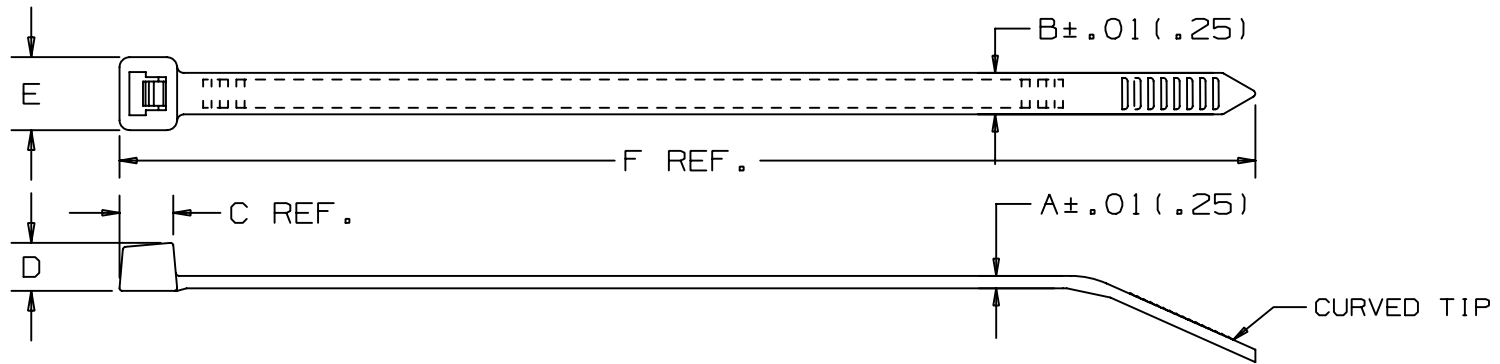

PANDUIT PART NO. *	BUNDLE DIA.		A	B	C	D	E	F	MIN. LOOP TENSILE lbs. (N)	CROSS SECTION	WEIGHT lbs./100 pcs. (g)
	MIN. in (mm)	MAX. in (mm)									
PLT1M	.06 (1.5)	.87 (22)	.043 (1.1)	.098 (2.5)	.169 (4.3)	.154 (3.9)	.180 (4.6)	3.9 (99)	18 (80)	MINIATURE	.07 (32)
PLT2I	.06 (1.5)	2.00 (51)	.045 (1.1)	.142 (3.6)	.206 (5.2)	.180 (4.6)	.240 (6.1)	8.0 (203)	40 (178)	INTERMEDIATE	.20 (91)
PLT2S	.06 (1.5)	1.88 (48)	.052 (1.3)	.190 (4.8)	.258 (6.6)	.220 (5.6)	.316 (8.0)	7.4 (188)	50 (222)	STANDARD	.29 (132)
PLT3S	.06 (1.5)	3.00 (76)	.052 (1.3)	.190 (4.8)	.265 (6.7)	.220 (5.6)	.337 (8.6)	11.5 (292)	50 (222)	STANDARD	.45 (204)

NOTES:

- * 1. SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE. SEE NOTE 2 FOR PART NUMBER SUFFIX FOR PART COLOR.
- 2. CABLE TIES ARE AVAILABLE IN 4 DIFFERENT FLUORESCENT COLORS:

PART NUMBER SUFFIX	COLOR
-53	ORANGE
-54	YELLOW
-55	GREEN
-59	PINK

SS_26476_05.PRT

CAD FILENAME/LAYERS

DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS

PANDUIT CORP. TINLEY PARK, ILLINOIS

PAN-TY FLUORESCENT LOCKING
CABLE TIE

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE:
(.X) ± (.XXX) ±
(.XX) ± ANGLES ±

UNLESS OTHERWISE SPECIFIED,
ALL DIMENSIONS ARE GIVEN
IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY
C. HARVELL

MAT'L:

SCALE

NONE

5 9/10/04 ERW

CORRECTED METRIC CONVERSIONS

26476

5

DATE
11/08/91

NYLON
6.6

DRAWING NO.

SS-26476

DWG
A
SIZE

REV DATE BY CHK

DESCRIPTION

ECN - R

CUST

SUP

CHK'D
HVP