Jun.1.2019 Copyright 2019 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

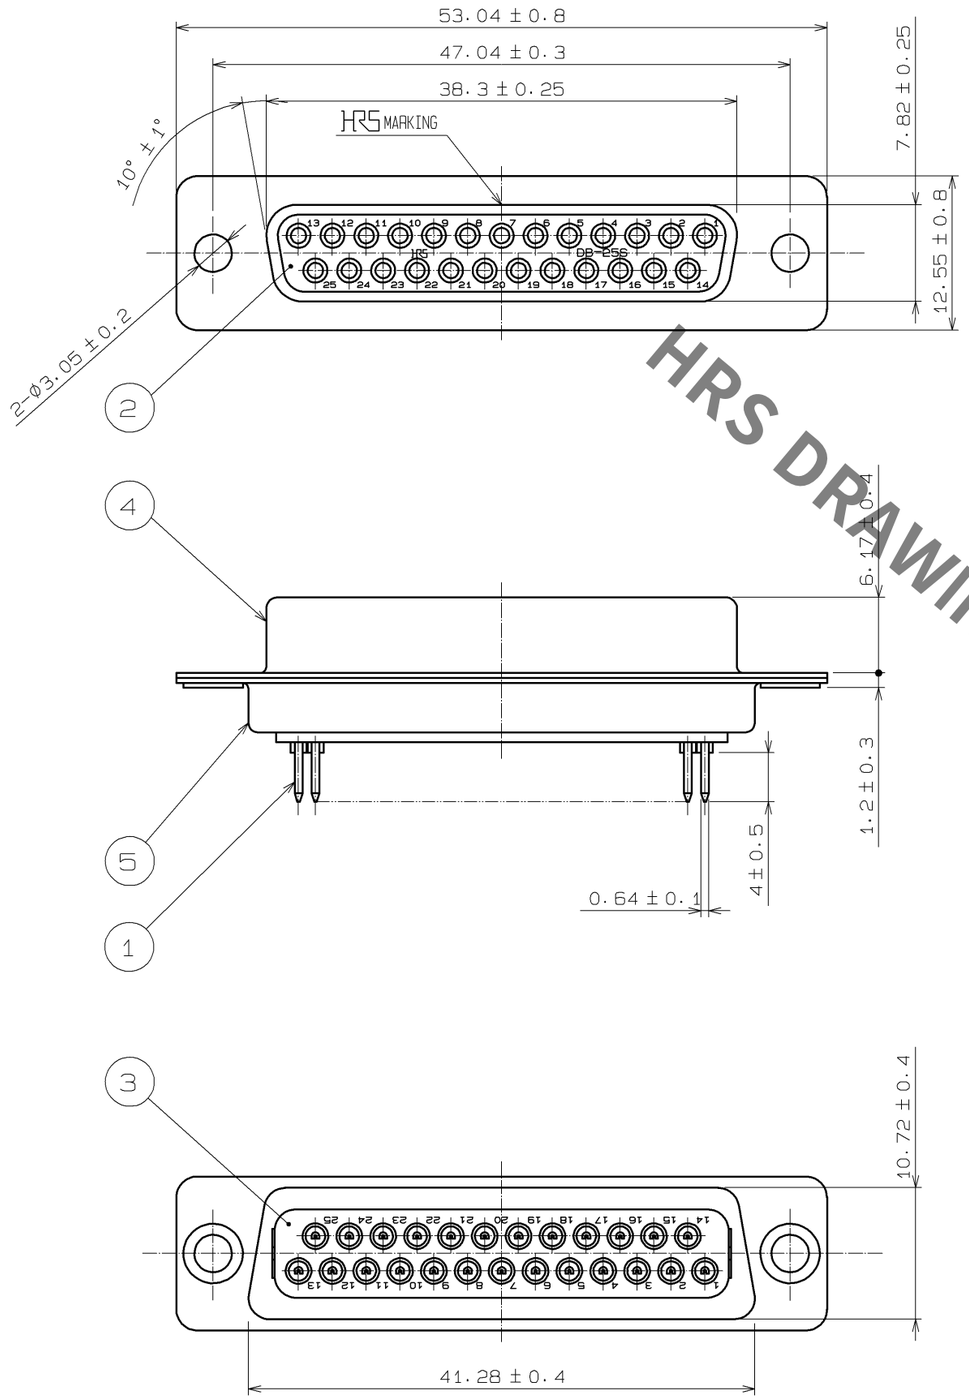

HRS DRAWING FOR REFERENCE

RECOMMENDED PC BOARD HOLE PATTERN

(SCALE 2/1)

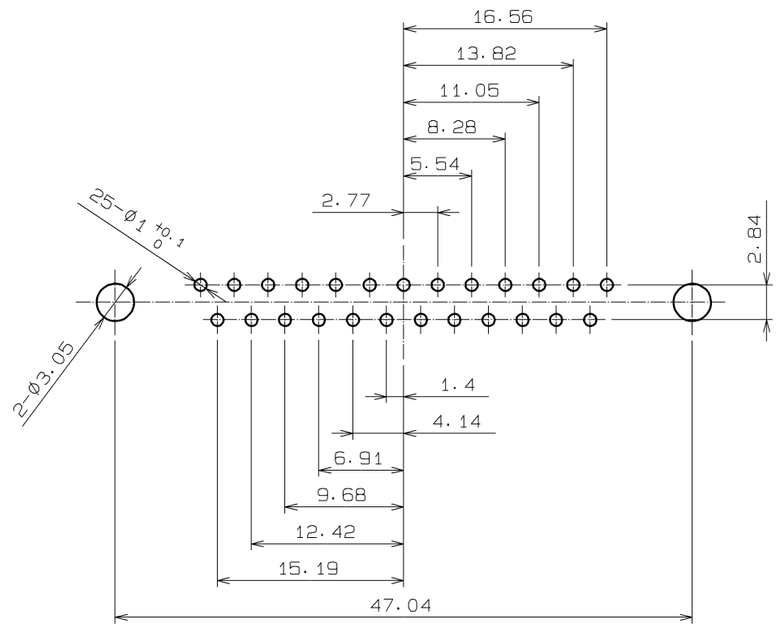

NOTE. TOLERANCE TO BE ±0.1 MAX,
UNLESS OTHERWISE SPECIFIED.

NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
3	PBT	BLACK, UL94V-0			
2	PBT	BLACK, UL94V-0	5	STEEL	OVER PLATING : NICKEL 1μm min UNDER PLATING : COPPER 5μm min
1	PHOSPHOR BRONZE	CONTACT AREA : GOLD PLATING 0.2μm min TERMINAL AREA : GOLD PLATING 0.03μm min UNDER PLATING : NICKEL PLATING 2μm min	4	STEEL	OVER PLATING : NICKEL 1μm min UNDER PLATING : COPPER 5μm min

UNITS	SCALE		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	△					

HIROSE ELECTRIC CO., LTD.

APPROVED	RI. TAKAYASU	12.12.18	DRAWING NO. EDC3-009839-02
CHECKED	EJ. WAKATSUKI	12.12.18	PART NO. SDBB-25S(55)
DESIGNED	TS. ITO	12.12.18	
DRAWN	TY. ITO	12.12.15	CODE NO. CL211-0252-3-55 △ 1/1