


## Zener Diodes

### Features

- Silicon Planar Power Zener Diodes
- For use in stabilizing and clipping circuits with high power rating
- The Zener voltages are graded according to the international E 24 standard. Smaller voltage tolerances are available upon request
- These diodes are also available in the DO41 case with the type designation ZPY3V9 to ZPY100
- Lead (Pb)-free component
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC



18315

### Mechanical Data

**Case:** MELF Glass case

**Weight:** approx. 135 mg

**Cathode Band Color:** black

**Packaging Codes/Options:**

GS18/ 5 k per 13" reel (12 mm tape), 10 k/box

GS08/ 1.5 k per 7" reel (12 mm tape), 12 k/box

### Absolute Maximum Ratings

$T_{amb} = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified

Parameter	Test condition	Symbol	Value	Unit
Zener current (see Table "Characteristics")				
Power dissipation		$P_{tot}$	1.0 <sup>1)</sup>	W

<sup>1)</sup> Valid provided that electrodes are kept at ambient temperature.

### Thermal Characteristics

$T_{amb} = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified

Parameter	Test condition	Symbol	Value	Unit
Thermal resistance junction to ambient air		$R_{thJA}$	170 <sup>1)</sup>	K/W
Thermal resistance junction to case		$R_{thJC}$	60	K/W
Junction temperature		$T_j$	175	$^{\circ}\text{C}$
Storage temperature		$T_{stg}$	- 55 to + 175	$^{\circ}\text{C}$

<sup>1)</sup> Valid provided that electrodes are kept at ambient temperature.

# ZMY3V9 to ZMY100



Vishay Semiconductors

## Electrical Characteristics

Partnumber	Zener Voltage (2)		Dynamic Resistance		Temperature Coefficient of Zener Voltage		Test Current	Reverse Voltage	Admissible Zener Current <sup>1)</sup>
	$V_Z$ at $I_{ZT}$		$r_{zj}$ at $I_{ZT}$ , $f = 1$ kHz		$\alpha_{VZ}$ at $I_{ZT}$		$I_{ZT}$	$V_R$ at $I_R = 0.5 \mu A$	$I_Z$ at $T_{amb} = 25^\circ C$
	V		$\Omega$		$10^{-4}/^\circ C$		mA	V	mA
	min	max		typ	min	max			
ZMY3V9	3.7	4.1	7	4	- 7	2	100	-	203
ZMY4V3	4	4.6	7	4	- 7	3	100	-	182
ZMY4V7	4.4	5	7	4	- 7	4	100	-	165
ZMY5V1	4.8	5.4	5	2	- 6	5	100	0.7	150
ZMY5V6	5.2	6	2	1	- 3	5	100	1.5	135
ZMY6V2	5.8	6.6	2	1	- 1	6	100	2	128
ZMY6V8	6.4	7.2	2	1	0	7	100	3	110
ZMY7V5	7	7.9	2	1	0	7	100	5	100
ZMY8V2	7.7	8.7	2	1	3	8	100	6	89
ZMY9V1	8.5	9.6	4	2	3	8	50	7	82
ZMY10	9.4	10.6	4	2	5	9	50	7.5	74
ZMY11	10.4	11.6	7	3	5	10	50	8.5	66
ZMY12	11.4	12.7	7	3	5	10	50	9	60
ZMY13	12.4	14.1	9	4	5	10	50	10	55
ZMY15	13.8	15.8	9	4	5	10	50	11	49
ZMY16	15.3	17.1	10	5	7	11	25	12	44
ZMY18	16.8	19.1	11	5	7	11	25	14	40
ZMY20	18.8	21.2	12	6	7	11	25	15	36
ZMY22	20.8	23.3	13	7	7	11	25	17	34
ZMY24	22.8	25.6	14	8	7	12	25	18	29
ZMY27	25.1	28.9	15	9	7	12	25	20	27
ZMY30	28	32	20	10	7	12	25	22.5	25
ZMY33	31	35	20	11	7	12	25	25	22
ZMY36	34	38	60	25	7	12	10	27	20
ZMY39	37	41	60	30	8	12	10	29	18
ZMY43	40	46	80	35	8	13	10	32	17
ZMY47	44	50	80	40	8	13	10	35	15
ZMY51	48	54	100	45	8	13	10	38	14
ZMY56	52	60	100	50	8	13	10	42	13
ZMY62	58	66	130	60	8	13	10	47	11
ZMY68	64	72	130	65	8	13	10	51	10
ZMY75	70	79	160	70	8	13	10	56	9
ZMY82	77	88	160	80	8	13	10	61	8
ZMY91	85	96	250	120	9	13	5	68	7.5
ZMY100	94	106	250	130	9	13	5	75	7

<sup>1)</sup> Valid provided that electrodes are kept at ambient temperature

<sup>2)</sup> Tested with pulses  $t_p = 5$  ms

## Typical Characteristics

$T_{amb} = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified

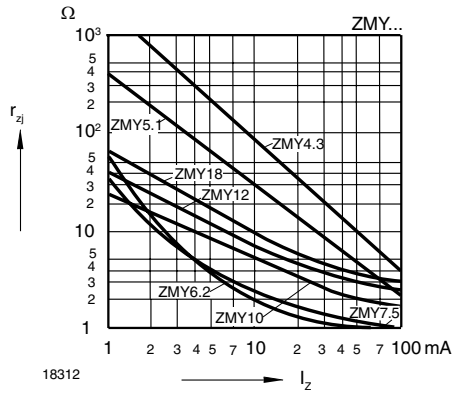


Figure 1. Dynamic Resistance vs. Zener Current

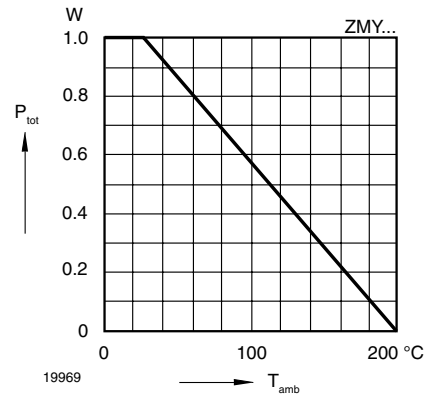


Figure 4. Admissible Power Dissipation vs. Ambient Temperature

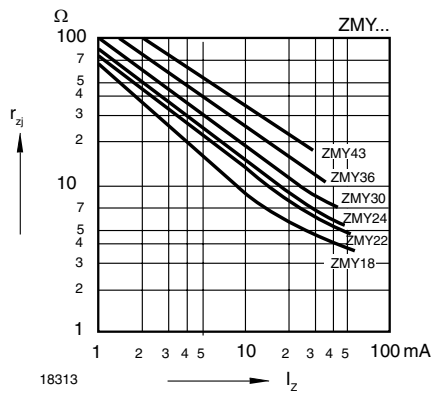


Figure 2. Dynamic Resistance vs. Zener Current

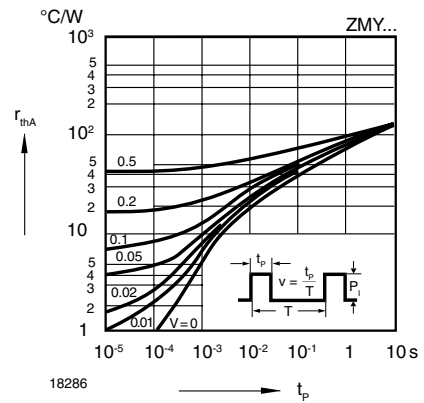


Figure 5. Pulse Thermal Resistance vs. Pulse Duration

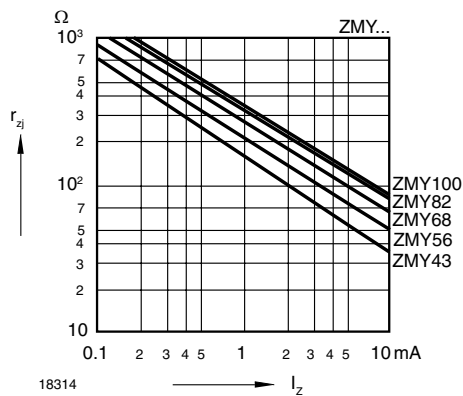


Figure 3. Dynamic Resistance vs. Zener Current

# ZMY3V9 to ZMY100

Vishay Semiconductors

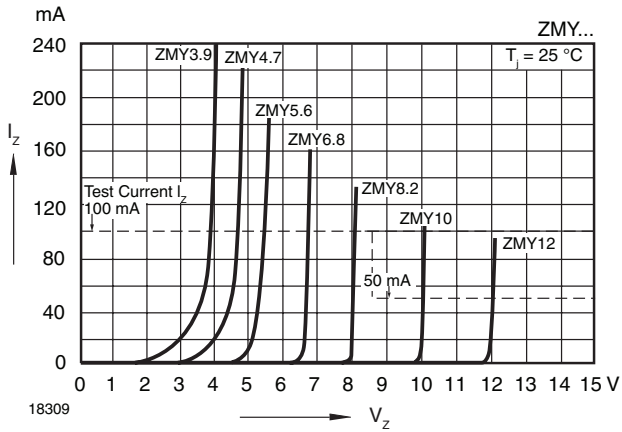


Figure 6. Breakdown Characteristics

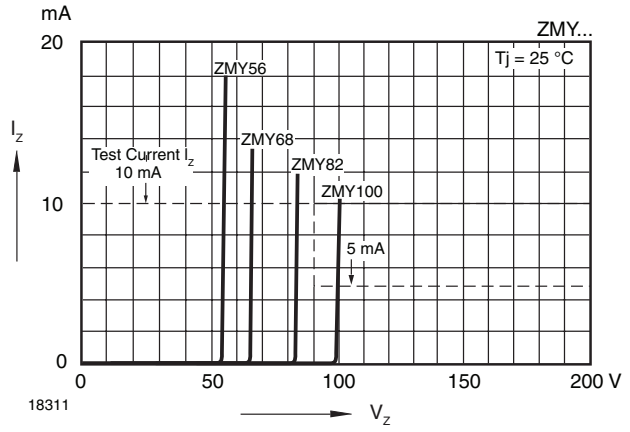


Figure 8. Breakdown Characteristics


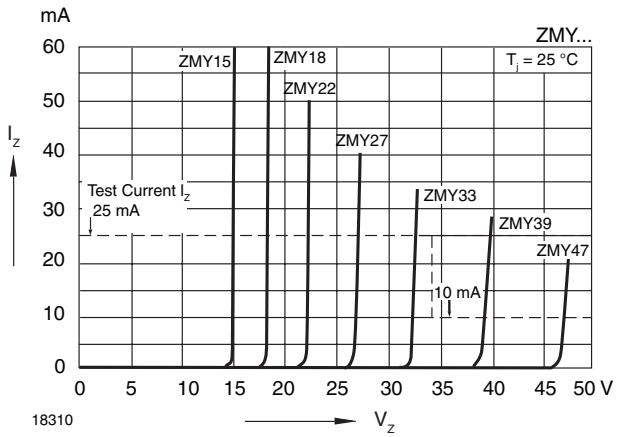



Figure 7. Breakdown Characteristics

## Package Dimensions of MELF Glass in mm (Inches): DO41

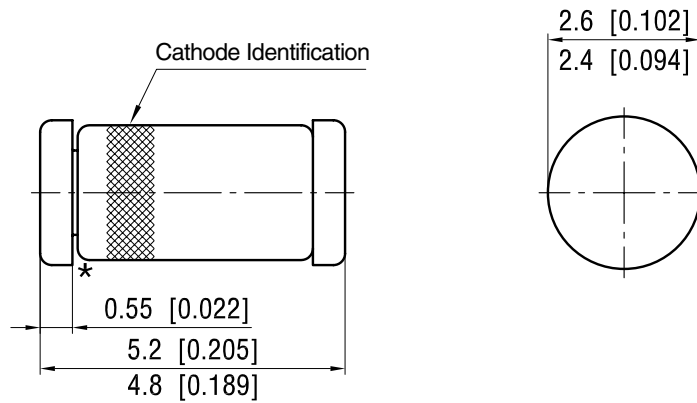

★ The gap between plug and glass can be either on cathode or anode side

foot print recommendation:

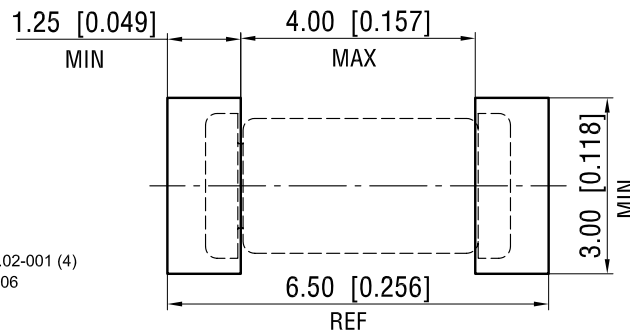

Document no.:S8-V-3453.02-001 (4)  
 Rev. 3 - Date: 07.June.2006  
 18317

### Ozone Depleting Substances Policy Statement

It is the policy of Vishay Semiconductor GmbH to

1. Meet all present and future national and international statutory requirements.
2. Regularly and continuously improve the performance of our products, processes, distribution and operating systems with respect to their impact on the health and safety of our employees and the public, as well as their impact on the environment.

It is particular concern to control or eliminate releases of those substances into the atmosphere which are known as ozone depleting substances (ODSs).

The Montreal Protocol (1987) and its London Amendments (1990) intend to severely restrict the use of ODSs and forbid their use within the next ten years. Various national and international initiatives are pressing for an earlier ban on these substances.

Vishay Semiconductor GmbH has been able to use its policy of continuous improvements to eliminate the use of ODSs listed in the following documents.

1. Annex A, B and list of transitional substances of the Montreal Protocol and the London Amendments respectively
2. Class I and II ozone depleting substances in the Clean Air Act Amendments of 1990 by the Environmental Protection Agency (EPA) in the USA
3. Council Decision 88/540/EEC and 91/690/EEC Annex A, B and C (transitional substances) respectively.

Vishay Semiconductor GmbH can certify that our semiconductors are not manufactured with ozone depleting substances and do not contain such substances.

We reserve the right to make changes to improve technical design  
and may do so without further notice.

Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer. Should the buyer use Vishay Semiconductors products for any unintended or unauthorized application, the buyer shall indemnify Vishay Semiconductors against all claims, costs, damages, and expenses, arising out of, directly or indirectly, any claim of personal damage, injury or death associated with such unintended or unauthorized use.

Vishay Semiconductor GmbH, P.O.B. 3535, D-74025 Heilbronn, Germany



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.