


## Professional Leaded Resistors



### FEATURES

- Approved according to CECC 40101-806
- Advanced thin film technology
- Power dissipation rating up to 1 W
- Excellent overall stability: Class 0.25
- Wide professional range: 0.22  $\Omega$  to 22 M $\Omega$
- Lead (Pb)-free solder contacts
- Pure tin plating provides compatibility with lead (Pb)-free and lead containing soldering processes
- Compatible with "Restriction of the use of Hazardous Substances" (RoHS) directive 2002/95/EC (issue 2004)

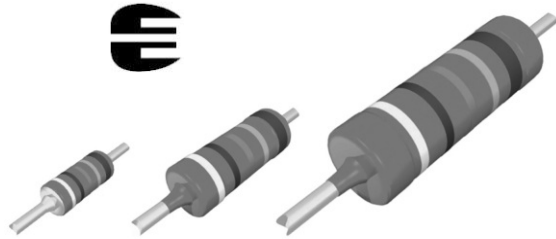

### DESCRIPTION

MBA/SMA 0204, MBB/SMA 0207 and MBE/SMA 0414 professional leaded thin film resistors are the general purpose resistor for all fields of professional electronics where reliability and stability is of major concern. Typical applications include industrial, telecommunication and medical equipment.

### APPLICATIONS

- Industrial
- Telecommunication
- Medical equipment

### METRIC SIZE

|       |      |      |      |
|-------|------|------|------|
| DIN:  | 0204 | 0207 | 0414 |
| CECC: | A    | B    | D    |

### TECHNICAL SPECIFICATIONS

| DESCRIPTION  | MBA/SMA 0204                        |                  | MBB/SMA 0207                   |                  | MBE/SMA 0414                   |                  |
|--|-------------------------------------|------------------|--------------------------------|------------------|--------------------------------|------------------|
| CECC Size  | A                                   |                  | B                              |                  | D                              |                  |
| Resistance Range   | 0.22 $\Omega$ to 10 M $\Omega$      |                  | 0.22 $\Omega$ to 22 M $\Omega$ |                  | 0.22 $\Omega$ to 22 M $\Omega$ |                  |
| Resistance Tolerance   | $\pm 5\%$ ; $\pm 1\%$ ; $\pm 0.5\%$ |                  |                                |                  |                                |                  |
| Temperature Coefficient  | $\pm 50$ ppm/K; $\pm 25$ ppm/K      |                  |                                |                  |                                |                  |
| Operation Mode   | Long term                           | Standard         | Long term                      | Standard         | Long term                      | Standard         |
| Climatic Category (LCT/UCT/Days)   | 55/125/56                           | 55/155/56        | 55/125/56                      | 55/155/56        | 55/125/56                      | 55/155/56        |
| Rated Dissipation, $P_{70}$  | 0.25 W                              | 0.4 W            | 0.4 W                          | 0.6 W            | 0.65 W                         | 1.0 W            |
| Operating Voltage, $U_{max}$ AC/DC   | 200 V                               |                  | 350 V                          |                  | 500 V                          |                  |
| Film Temperature   | 125 $^{\circ}$ C                    | 155 $^{\circ}$ C | 125 $^{\circ}$ C               | 155 $^{\circ}$ C | 125 $^{\circ}$ C               | 155 $^{\circ}$ C |
| Max. Resistance Change at $P_{70}$ for Resistance Range, $\Delta R/R$ max., After: | 1 $\Omega$ to 332 k $\Omega$        |                  | 1 $\Omega$ to 1 M $\Omega$     |                  | 1 $\Omega$ to 2.4 M $\Omega$   |                  |
| 1000 h   | $\leq 0.25\%$                       | $\leq 0.5\%$     | $\leq 0.25\%$                  | $\leq 0.5\%$     | $\leq 0.2\%$                   | $\leq 0.4\%$     |
| 8000 h   | $\leq 0.5\%$                        | $\leq 1.0\%$     | $\leq 0.5\%$                   | $\leq 1.0\%$     | $\leq 0.4\%$                   | $\leq 0.8\%$     |
| 225 000 h  | $\leq 1.5\%$                        | -                | $\leq 1.5\%$                   | -                | $\leq 1.2\%$                   | -                |
| Specified Lifetime   | 225 000 h                           | 8000 h           | 225 000 h                      | 8000 h           | 225 000 h                      | 8000 h           |
| Permissible Voltage Against Ambient (Insulation):                                  |                                     |                  |                                |                  |                                |                  |
| 1 Min; $U_{ins}$   | 300 V                               |                  | 500 V                          |                  | 800 V                          |                  |
| Continuous   | 75 V                                |                  | 75 V                           |                  | 75 V                           |                  |
| Failure Rate   | $\leq 0.7 \times 10^{-9}/h$         |                  | $\leq 0.3 \times 10^{-9}/h$    |                  | $\leq 0.1 \times 10^{-9}/h$    |                  |

### Note

MB\_ series has been merged with the related SMA series to form one series "MB\_/SMA\_"



# MBA/SMA 0204, MBB/SMA 0207, MBE/SMA 0414 - Professional

Professional Leaded Resistors

Vishay Beyschlag

| PART NUMBER AND PRODUCT DESCRIPTION   |  |  |  |  |                             |   |  |               |   |   |   |   |   |   |   |   |   |
|---|--|--|--|--|-----------------------------|---|--|---------------|---|---|---|---|---|---|---|---|---|
| PART NUMBER: MBB02070C1001FCT00   |  |  |  |  |                             |   |  |               |   |   |   |   |   |   |   |   |   |
| M   | B  | B  | 0  | 2                                      | 0                           | 7   | 0                                      | C             | 1 | 0 | 0 | 1 | F | C | T | 0 | 0 |
| MODEL/SIZE  | SPECIAL CHARACTER  | TCR/MATERIAL                                   | VALUE  |  |                             | TOLERANCE   | PACKAGING <sup>(1)</sup>               | SPECIAL       |   |   |   |   |   |   |   |   |   |
| MBA0204 =<br>MBA/SMA 0204<br>MBB0207 =<br>MBB/SMA 0207<br>MBE0414 =<br>MBE/SMA 0414 | 0 = Neutral<br>N = RB Radial 5 mm<br>S = UB Radial 2.5 mm<br>I = L0 (without lacquer<br>on termination for<br>MBB/SMA0207) | D = ± 25 ppm/K<br>C = ± 50 ppm/K<br>Z = Jumper | 3 digit value<br>1 digit multiplier<br>MULTIPLIER<br>7 = *10 <sup>-3</sup> 2 = *10 <sup>2</sup><br>8 = *10 <sup>-2</sup> 3 = *10 <sup>3</sup><br>9 = *10 <sup>-1</sup> 4 = *10 <sup>4</sup><br>0 = *10 <sup>0</sup> 5 = *10 <sup>5</sup><br>1 = *10 <sup>1</sup> 6 = *10 <sup>6</sup><br>0000 = Jumper |  |                             | D = ± 0.5 %<br>F = ± 1 %<br>J = ± 5 %<br>Z = Jumper | CT<br>C1<br>RP<br>R1<br>R2<br>R4<br>N4 | 00 = Standard |   |   |   |   |   |   |   |   |   |
| PRODUCT DESCRIPTION: MBB/SMA 0207-50 1% CT 1K0                                      |  |  |  |  |                             |   |  |               |   |   |   |   |   |   |   |   |   |
| MBB/SMA 0207  | -  | 50   | 1%   | CT                                     | 1K0                         |   |  |               |   |   |   |   |   |   |   |   |   |
| MODEL/SIZE  |  | TCR  | TOLERANCE  | PACKAGING <sup>(1)</sup>               | RESISTANCE                  |   |  |               |   |   |   |   |   |   |   |   |   |
| MBA/SMA 0204<br>MBB/SMA 0207<br>MBE/SMA 0414  |  | ± 25 ppm/K<br>± 50 ppm/K                       | ± 0.5 %<br>± 1.0 %<br>± 5.0 %  | CT<br>C1<br>RP<br>R1<br>R2<br>R4<br>N4 | 1K0 = 1 kΩ<br>51R1 = 51.1 Ω |   |  |               |   |   |   |   |   |   |   |   |   |

**Notes**

<sup>(1)</sup>Please refer to table PACKAGING for complete information

- The PART NUMBER shown above is to facilitate the unified part numbering system for ordering products

| PACKAGING    |        |                 |        |                 |
|--------------|--------|-----------------|--------|-----------------|
| MODEL        | REEL   |                 | BOX    |                 |
|              | PIECES | CODE            | PIECES | CODE            |
| MBA/SMA 0204 | 1000   | R1              | 1000   | C1              |
|              | 5000   | RP              | 5000   | CT              |
| MBB/SMA 0207 | 1000   | R1              | 1000   | C1              |
|              | 4000   | R4 (for RB, UB) | 4000   | N4 (for RB, UB) |
|              | 5000   | RP              | 5000   | CT              |
| MBE/SMA 0414 | 2500   | R2              | 1000   | C1              |

| 12NC CODE FOR HISTORICAL CODING REFERENCE OF MBA 0204/MBB 0207/MBE 0414 |            |           |                           |               |               |               |               |
|---|------------|-----------|---------------------------|---------------|---------------|---------------|---------------|
| DESCRIPTION   |            |           | ORDERING CODE 2312 ... .. |               |               |               |               |
|   |            |           | AMMOPACK                  |               | REEL          |               |               |
| TYPE  | TCR        | TOL.      | C1 1000 units             | CT 5000 units | R1 1000 units | R2 2500 units | RP 5000 units |
| MBA 0204  | ± 50 ppm/K | ± 5 %     | 900 3....                 | 905 3....     | 700 3....     | -             | 805 3....     |
|   |            | ± 1 %     | 900 1....                 | 905 1....     | 700 1....     | -             | 805 1....     |
|   |            | ± 0.5 %   | 900 5....                 | 905 5....     | 700 5....     | -             | 805 5....     |
|   | ± 25 ppm/K | ± 1 %     | 901 1....                 | 906 1....     | 701 1....     | -             | 806 1....     |
|   |            | ± 0.5 %   | 901 5....                 | 906 5....     | 701 5....     | -             | 806 5....     |
| jumper  | -          | 900 90001 | 905 90001                 | 700 90001     | -             | 805 90001     |               |
| MBB 0207  | ± 50 ppm/K | ± 5 %     | 910 3....                 | 915 3....     | 710 3....     | -             | 815 3....     |
|   |            | ± 1 %     | 910 1....                 | 915 1....     | 710 1....     | -             | 815 1....     |
|   |            | ± 0.5 %   | 910 5....                 | 915 5....     | 710 5....     | -             | 815 5....     |
|   | ± 25 ppm/K | ± 1 %     | 911 1....                 | 916 1....     | 711 1....     | -             | 816 1....     |
|   |            | ± 0.5 %   | 911 5....                 | 916 5....     | 711 5....     | -             | 816 5....     |
| jumper  | -          | 910 90001 | 915 90001                 | 710 90001     | -             | 815 90001     |               |
| MBE 0414  | ± 50 ppm/K | ± 5 %     | 920 3....                 | -             | -             | 825 3....     | -             |
|   |            | ± 1 %     | 920 1....                 | -             | -             | 825 1....     | -             |
|   |            | ± 0.5 %   | 920 5....                 | -             | -             | 825 5....     | -             |
|   | ± 25 ppm/K | ± 1 %     | 921 1....                 | -             | -             | 826 1....     | -             |
| ± 0.5 %   |            | 921 5.... | -                         | -             | 826 5....     | -             |               |

**12NC INFORMATION**


Last Digit of 12NC Indicating Resistance Decade

| RESISTANCE DECADE | LAST DIGIT |
|-------------------|------------|
| 0.1 Ω to 0.999 Ω  | 7          |
| 1 Ω to 9.99 Ω     | 8          |
| 10 Ω to 99.9 Ω    | 9          |
| 100 Ω to 999 Ω    | 1          |
| 1 kΩ to 9.99 kΩ   | 2          |
| 10 kΩ to 99.9 kΩ  | 3          |
| 100 kΩ to 999 kΩ  | 4          |
| 1 MΩ to 9.99 MΩ   | 5          |
| 10 MΩ to 99.9 MΩ  | 6          |

**12NC Example (for Historical Coding reference of MBA 0204/MBB 0207/MBE 0414)**

The 12NC code of a MBA 0204 resistor, value 47.5 kΩ and TCR 50 with ± 1 % tolerance, supplied on bandolier in a box of 5000 units is: 2312 905 14753.

**DIMENSIONS**

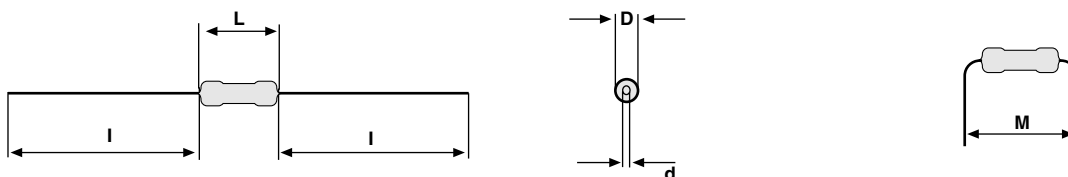

| <b>DIMENSIONS</b> - leaded resistor types, mass and relevant physical dimensions |                        |                        |                        |                        |                        |           |
|--|------------------------|------------------------|------------------------|------------------------|------------------------|-----------|
| TYPE   | D <sub>max.</sub> (mm) | L <sub>max.</sub> (mm) | d <sub>nom.</sub> (mm) | l <sub>min.</sub> (mm) | M <sub>min.</sub> (mm) | MASS (mg) |
| MBA/SMA 0204   | 1.6                    | 3.6                    | 0.5                    | 29.0                   | 5.0                    | 125       |
| MBB/SMA 0207   | 2.5                    | 6.3                    | 0.6                    | 28.0                   | 10.0 <sup>(1)</sup>    | 220       |
| MBE/SMA 0414   | 4.0                    | 11.9                   | 0.8                    | 31.0                   | 15.0                   | 700       |

**Note**

(1) For 7.5 ≤ M < 10.0 mm, use version MBB/SMA 0207 ... L0 without lacquer on the leads

| <b>TEMPERATURE COEFFICIENT AND RESISTANCE RANGE</b> |           |                                    |                                    |                  |
|---|-----------|------------------------------------|------------------------------------|------------------|
| DESCRIPTION   |           | RESISTANCE VALUE <sup>(2)</sup>    |                                    |                  |
| TCR   | TOLERANCE | MBA/SMA 0204                       | MBB/SMA 0207                       | MBE/SMA 0414     |
| ± 50 ppm/K  | ± 5 %     | 0.22 Ω to 0.91 Ω                   | 0.22 Ω to 0.91 Ω<br>11 MΩ to 22 MΩ | 0.22 Ω to 0.91 Ω |
|   | ± 2%      | -                                  | 0.22 Ω to 0.91 Ω                   | -                |
|   | ± 1 %     | 1 Ω to 10 MΩ                       | 1 Ω to 10 MΩ                       | 1 Ω to 22 MΩ     |
|   | ± 0.5 %   | 10 Ω to 475 kΩ                     | 10 Ω to 1 MΩ                       | 10 Ω to 2.4 MΩ   |
| ± 25 ppm/K  | ± 1 %     | 10 Ω to 475 kΩ                     | 10 Ω to 1 MΩ                       | 10 Ω to 2.4 MΩ   |
|   | ± 0.5 %   | 10 Ω to 475 kΩ                     | 10 Ω to 1 MΩ                       | 10 Ω to 2.4 MΩ   |
| Jumper  | -         | ≤ 10 mΩ; I <sub>max.</sub> = 3.0 A | ≤ 10 mΩ, I <sub>max.</sub> = 5.0 A | -                |

**Notes**

(2) Resistance value to be selected from E24 series for ± 5 %, ± 2 % tolerance, from E24/E96 series for ± 1 % tolerance and from E24/E192 for ± 0.5 % tolerance

- Resistance ranges printed in bold are preferred TCR/tolerance combinations with optimized availability



### DESCRIPTION

Production is strictly controlled and follows an extensive set of instructions established for reproducibility. A homogeneous film of metal alloy is deposited on a high grade ceramic body (85 % Al<sub>2</sub>O<sub>3</sub>) and conditioned to achieve the desired temperature coefficient. Nickel plated steel termination caps are firmly pressed on the metallized rods. A special laser is used to achieve the target value by smoothly cutting a helical groove in the resistive layer without damaging the ceramics. Connecting wires of electrolytic copper plated with 100 % pure tin are welded to the termination caps. The resistor elements are covered by a light blue protective coating designed for electrical, mechanical and climatic protection. Four or five colour code rings designate the resistance value and tolerance in accordance with **IEC 60062**.

The result of the determined production is verified by an extensive testing procedure performed on 100 % of the individual resistors. Only accepted products are stuck directly on the adhesive tapes in accordance with **IEC 60286-1**.

### ASSEMBLY

The resistors are suitable for processing on automatic insertion equipment and cutting and bending machines. Excellent solderability is proven, even after extended storage. They are suitable for automatic soldering using wave or dipping. The encapsulation is resistant to all cleaning solvents commonly used in the electronics industry, including alcohols, esters and aqueous solutions. The suitability of conformal coatings, if applied, shall be qualified by appropriate means to ensure the long-term stability of the whole system. The resistors are completely lead (Pb)-free, the pure tin plating provides compatibility with lead (Pb)-free and lead-containing soldering processes. The immunity of the plating against tin whisker growth has been proven under extensive testing. All products comply with the CEFIC-EECA-EICTA list of legal restrictions on hazardous substances. This includes full compliance with the following directives:

- 2000/53/EC End of Vehicle Life Directive (ELV)
- 2000/53/EC Annex II to End of Vehicle Life Directive (ELV II)
- 2002/95/EC Restriction of the use of Hazardous Substances Directive (RoHS)
- 2002/96/EC Waste Electrical and Electrical Equipment Directive (WEEE)

### APPROVALS

The resistors are tested in accordance with **CECC 40101-806** which refers to **EN 60115-1** and **EN 140100**. Approval of conformity is indicated by the CECC logo on the package label.

Vishay BEYSCHLAG has achieved “**Approval of Manufacturer**” in accordance with **EN 100114-1**.


### SPECIALS

This product family of leaded thin film resistors for professional applications is complemented by **Zero Ohm Jumpers** and **Isolators**.


On request, resistors are available with established reliability in accordance with **CECC 40101-806 Version E**. Please refer to the special data sheet for information on failure rate level, available resistance ranges and ordering codes.




**FUNCTIONAL PERFORMANCE**

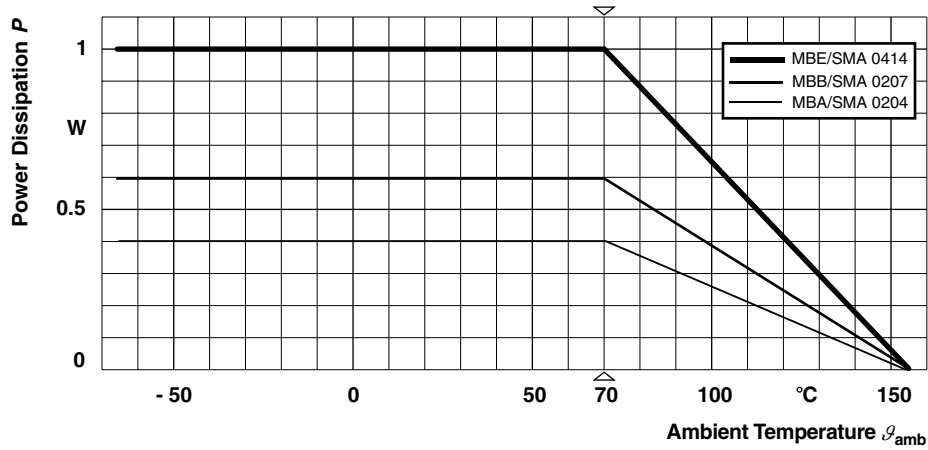


Derating - Standard Operation

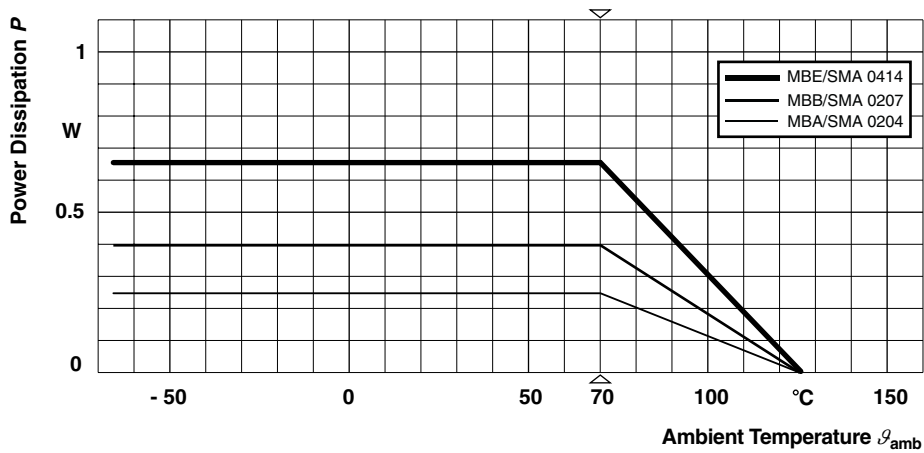


Derating Long Term Operation

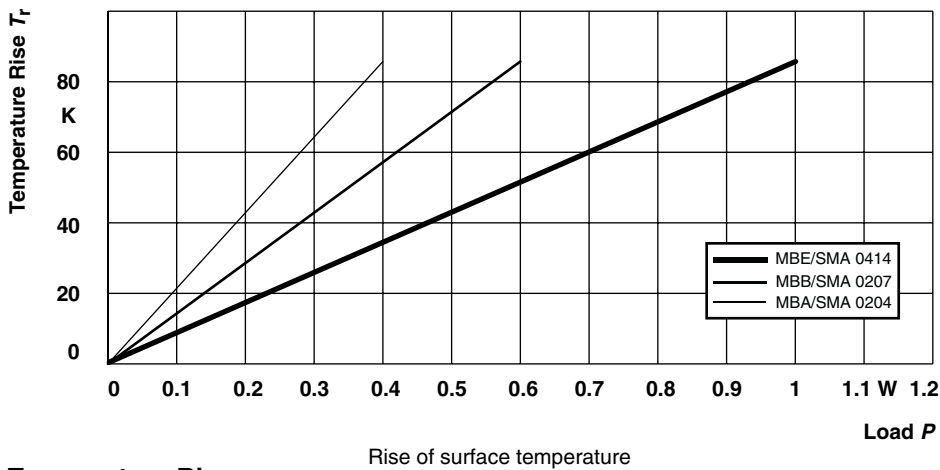


Temperature Rise

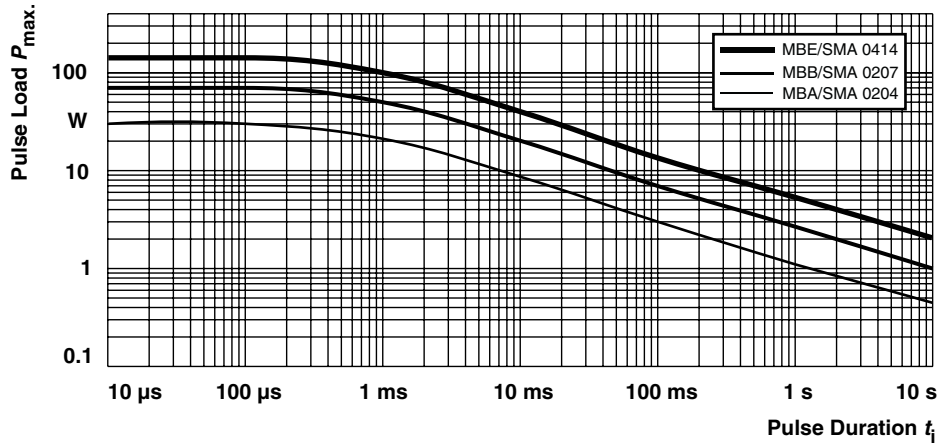


**Single Pulse**

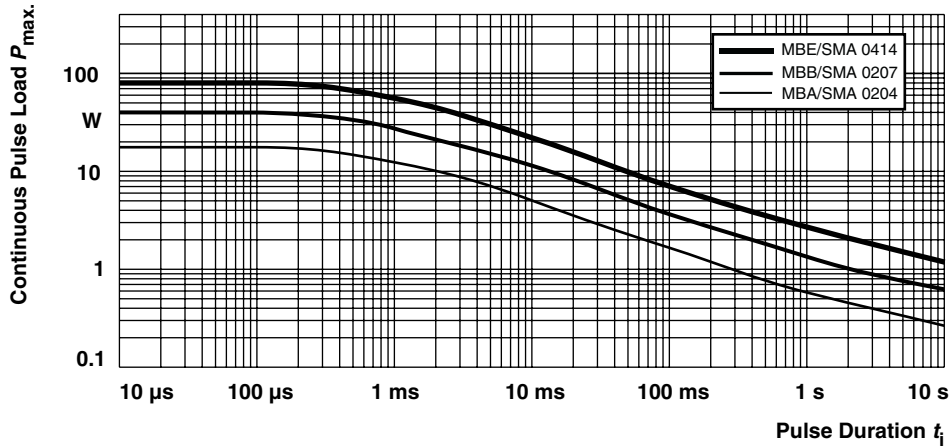

**Continuous Pulse**

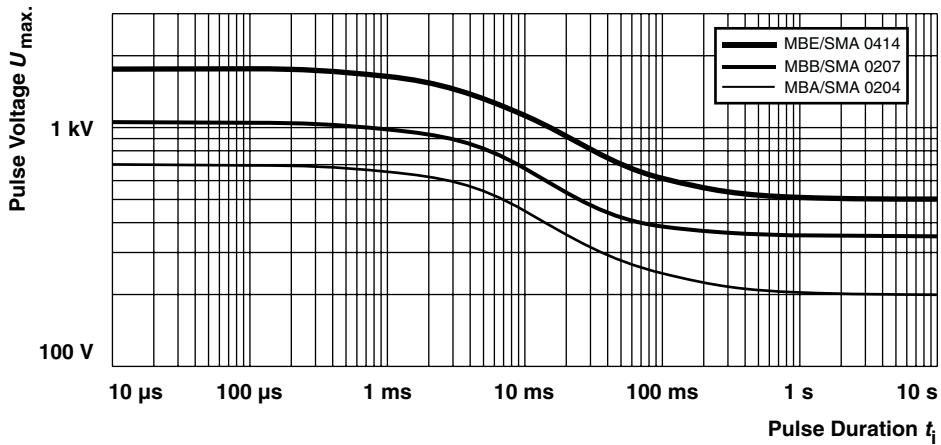


**Pulse Voltage**

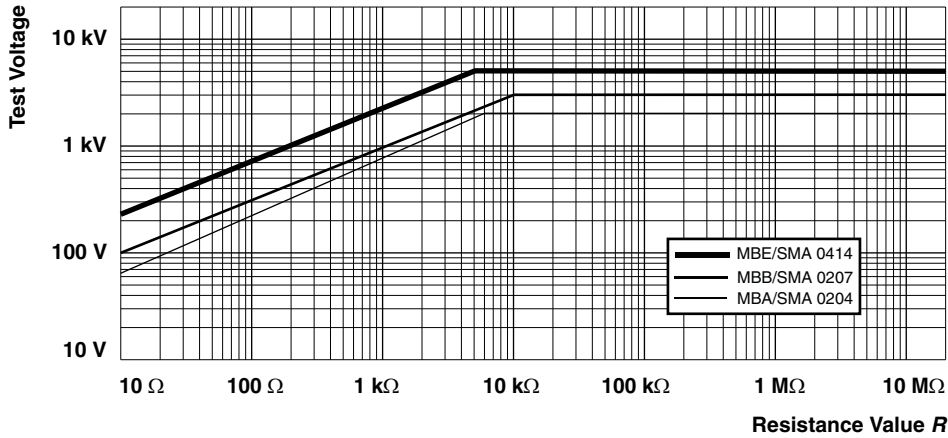


Pulse load rating in accordance with IEC 60115-1, 4.27; 1.2 μs/50 μs; 5 pulses at 12 s intervals; for permissible resistance change 0.5 %.

**1.2/50 Pulse**

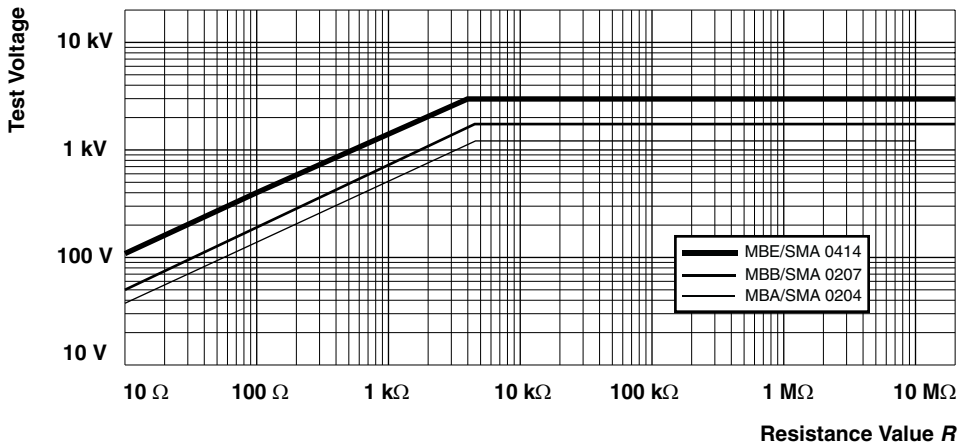

Pulse load rating in accordance with IEC 60115-1, 4.27; 10 μs/700 μs; 10 pulses at 1 minute intervals; for permissible resistance change 0.5 %.

**10/700 Pulse**

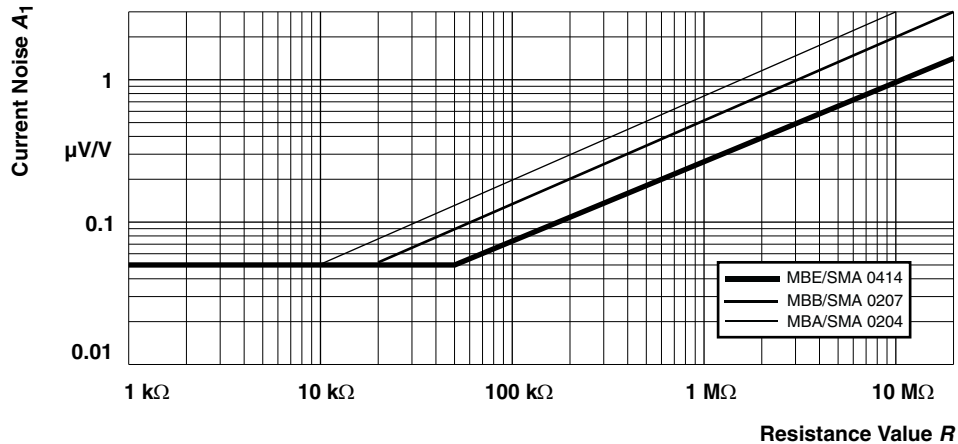

**Current noise - A<sub>1</sub> In Accordance With IEC 60195**



**TESTS AND REQUIREMENTS**

Essentially all tests are carried out in accordance with the following specifications:

EN 140000/IEC 60115-1, Generic specification (includes tests)

EN 140100/IEC 60115-2, Sectional specification (includes schedule for qualification approval)

CECC 40101-806, Detail specification (includes schedule for conformance inspection)

Most of the components are approved in accordance with the European CECC-system, where applicable. The Test and Requirements table contains only the most important tests. For the full test schedule refer to the documents listed above. The testing also covers most of the requirements specified by EIA/IS-703 and JIS-C-5202.

The tests are carried out in accordance with IEC 60068 and under standard atmospheric conditions in accordance with IEC 60068-1, 5.3. Climatic category LCT/UCT/56 (rated temperature range: Lower Category Temperature, Upper Category Temperature; damp heat, long term, 56 days) is valid.

Unless otherwise specified the following values apply:

Temperature: 15 °C to 35 °C

Relative humidity: 45 % to 75 %

Air pressure: 86 kPa to 106 kPa (860 mbar to 1060 mbar).

For testing the components are mounted on a test board in accordance with IEC 60115-1, 4.31 unless otherwise specified.

In Test Procedures and Requirements table, only the tests and requirements are listed with reference to the relevant clauses of IEC 60115-1 and IEC 60068-2; a short description of the test procedure is also given.

| <b>TEST PROCEDURES AND REQUIREMENTS</b> |                         |                         |                                  |  |                               |                   |
|---|-------------------------|-------------------------|----------------------------------|--|-------------------------------|-------------------|
| IEC 60115-1 CLAUSE                      | IEC 60068-2 TEST METHOD | TEST                    | PROCEDURE                        | REQUIREMENTS PERMISSIBLE CHANGE ( $\Delta R$ max.) |                               |                   |
|   |                         |                         |                                  | STABILITY CLASS 0.5                                | STABILITY CLASS 1             | STABILITY CLASS 2 |
|   |                         |                         | Stability for product types:     |  |                               |                   |
|   |                         |                         | <b>MBA/SMA 0204</b>              | 1 $\Omega$ to 332 k $\Omega$                       | 0.22 $\Omega$ to < 1 $\Omega$ | > 332 k $\Omega$  |
|   |                         |                         | <b>MBB/SMA 0207</b>              | 1 $\Omega$ to 1 M $\Omega$                         | 0.22 $\Omega$ to < 1 $\Omega$ | > 1 M $\Omega$    |
|   |                         |                         | <b>MBE/SMA 0414</b>              | 1 $\Omega$ to 2.4 M $\Omega$                       | 0.22 $\Omega$ to < 1 $\Omega$ | > 2.4 M $\Omega$  |
| 4.5                                     | -                       | Resistance              |                                  | $\pm 5 \%$ ; $\pm 1 \%$ ; $\pm 0.5 \%$             |                               |                   |
| 4.8.4.2                                 | -                       | Temperature coefficient | At 20/LCT/20 °C and 20/UCT/20 °C | $\pm 50$ ppm/K; $\pm 25$ ppm/K                     |                               |                   |





| TEST PROCEDURES AND REQUIREMENTS |                         |   |  |  |   |                                   |
|----------------------------------|-------------------------|---|--|--|---|-----------------------------------|
| IEC 60115-1 CLAUSE               | IEC 60068-2 TEST METHOD | TEST  | PROCEDURE  | REQUIREMENTS PERMISSIBLE CHANGE ( $\Delta R$ max.)                         |   |                                   |
|                                  |                         |   | Stability for product types:   | STABILITY CLASS 0.5  | STABILITY CLASS 1                                 | STABILITY CLASS 2                 |
|                                  |                         |   | <b>MBA/SMA 0204</b>  | 1 $\Omega$ to 332 k $\Omega$   | 0.22 $\Omega$ to < 1 $\Omega$                     | > 332 k $\Omega$                  |
|                                  |                         |   | <b>MBB/SMA 0207</b>  | 1 $\Omega$ to 1 M $\Omega$   | 0.22 $\Omega$ to < 1 $\Omega$                     | > 1 M $\Omega$                    |
|                                  |                         |   | <b>MBE/SMA 0414</b>  | 1 $\Omega$ to 2.4 M $\Omega$   | 0.22 $\Omega$ to < 1 $\Omega$                     | > 2.4 M $\Omega$                  |
| 4.25.1                           | -                       | Endurance at 70 °C: standard operation mode | $U = \sqrt{P_{70} \times R}$ or<br>$U = U_{max.}$ ;<br>1.5 h ON; 0.5 h OFF |  |   |                                   |
|                                  |                         |   | 70 °C; 1000 h  | $\pm (0.5 \% R + 0.05 \Omega)$   | $\pm (0.5 \% R + 0.05 \Omega)$                    | $\pm 0.5 \% R$                    |
|                                  |                         |   | 70 °C; 8000 h  | $\pm (1 \% R + 0.05 \Omega)$   | $\pm (1 \% R + 0.05 \Omega)$                      | $\pm 1 \% R$                      |
|                                  |                         |   | Endurance at 70 °C: long term operation mode                               | $U = \sqrt{P_{70} \times R}$ or<br>$U = U_{max.}$ ;<br>1.5 h ON; 0.5 h OFF |   |                                   |
|                                  |                         |   | 70 °C; 1000 h  | $\pm (0.25 \% R + 0.05 \Omega)$  | $\pm (0.25 \% R + 0.05 \Omega)$                   | $\pm 0.25 \% R$                   |
|                                  |                         |   | 70 °C; 8000 h  | $\pm (0.5 \% R + 0.05 \Omega)$   | $\pm (0.5 \% R + 0.05 \Omega)$                    | $\pm 0.5 \% R$                    |
| 4.25.3                           | -                       | Endurance at upper category temperature     | 125 °C; 1000 h   | $\pm (0.25 \% R + 0.05 \Omega)$  | $\pm (0.5 \% R + 0.05 \Omega)$                    | $\pm 1 \% R$                      |
|                                  |                         |   | 155 °C; 1000 h   | $\pm (0.5 \% R + 0.05 \Omega)$   | $\pm (1 \% R + 0.05 \Omega)$                      | $\pm 2 \% R$                      |
| 4.24                             | 78 (Cab)                | Damp heat, steady state                     | (40 $\pm$ 2) °C; 56 days;<br>(93 $\pm$ 3) % RH                             | $\pm (0.5 \% R + 0.05 \Omega)$   | $\pm (1 \% R + 0.05 \Omega)$                      | $\pm 2 \% R$                      |
| 4.23                             |                         | Climatic sequence:                          |  |  |   |                                   |
| 4.23.2                           | 2 (Ba)                  | Dry heat                                    | 155 °C; 16 h   |  |   |                                   |
| 4.23.3                           | 30 (Db)                 | Damp heat, cyclic                           | 55 °C; 24 h;<br>90 % to 100 % RH;<br>1 cycle                               |  |   |                                   |
| 4.23.4                           | 1 (Aa)                  | Cold  | - 55 °C; 2 h   |  |   |                                   |
| 4.23.5                           | 13 (M)                  | Low air pressure                            | 8.5 kPa; 2 h;<br>15 °C to 35 °C  |  |   |                                   |
| 4.23.6                           | 30 (Db)                 | Damp heat, cyclic                           | 55 °C; 5 days;<br>95 % to 100 % RH;<br>5 cycles                            | $\pm (0.5 \% R + 0.05 \Omega)$<br>no visible damage                        | $\pm (1 \% R + 0.05 \Omega)$<br>no visible damage | $\pm 2 \% R$<br>no visible damage |



| TEST PROCEDURES AND REQUIREMENTS |   |                              |   |   |  |                                     |
|----------------------------------|---|------------------------------|---|---|--|-------------------------------------|
| IEC 60115-1 CLAUSE               | IEC 60068-2 TEST METHOD                     | TEST                         | PROCEDURE   | REQUIREMENTS PERMISSIBLE CHANGE ( $\Delta R$ max.)  |  |                                     |
|                                  |   |                              | Stability for product types:  | <b>STABILITY CLASS 0.5</b>                          | <b>STABILITY CLASS 1</b>                             | <b>STABILITY CLASS 2</b>            |
|                                  |   |                              | <b>MBA/SMA 0204</b>   | 1 $\Omega$ to 332 k $\Omega$                        | 0.22 $\Omega$ to < 1 $\Omega$                        | > 332 k $\Omega$                    |
|                                  |   |                              | <b>MBB/SMA 0207</b>   | 1 $\Omega$ to 1 M $\Omega$                          | 0.22 $\Omega$ to < 1 $\Omega$                        | > 1 M $\Omega$                      |
|                                  |   |                              | <b>MBE/SMA 0414</b>   | 1 $\Omega$ to 2.4 M $\Omega$                        | 0.22 $\Omega$ to < 1 $\Omega$                        | > 2.4 M $\Omega$                    |
| 4.13                             | -   | Short time overload          | Room temperature;<br>$U = 2.5 \times \sqrt{P_{70}} \times \bar{R}$ or<br>$U = 2 \times U_{max}$ ; 5 s | $\pm (0.1 \% R + 0.01 \Omega)$<br>no visible damage | $\pm (0.25 \% R + 0.05 \Omega)$<br>no visible damage | $\pm 0.5 \% R$<br>no visible damage |
| 4.19                             | 14 (Na)                                     | Rapid change of temperature  | 30 min at LCT and<br>30 min at UCT; 5 cycles  | $\pm (0.1 \% R + 0.01 \Omega)$<br>no visible damage | $\pm (0.25 \% R + 0.05 \Omega)$<br>no visible damage | $\pm 0.5 \% R$<br>no visible damage |
| 4.29                             | 45 (XA)                                     | Component solvent resistance | Isopropyl alcohol<br>+ 23 $^{\circ}\text{C}$ ; toothbrush method                                      | Marking legible;<br>no visible damage               |  |                                     |
| 4.18.2                           | 20 (Tb)                                     | Resistance to soldering heat | Unmounted components;<br>(260 $\pm$ 5) $^{\circ}\text{C}$ ;<br>(10 $\pm$ 1) s                         | $\pm (0.1 \% R + 0.01 \Omega)$<br>no visible damage | $\pm (0.25 \% R + 0.05 \Omega)$<br>no visible damage | $\pm 0.5 \% R$<br>no visible damage |
| 4.17                             | 20 (Ta)                                     | Solderability                | + 235 $^{\circ}\text{C}$ ; 2 s<br>solder bath method  | good tinning (> 95 %<br>covered, no visible damage) |  |                                     |
| 4.22                             | 6 (B4)                                      | Vibration                    | 6 h; 10 Hz to 2000 Hz<br>1.5 mm or 196 m/s <sup>2</sup>   | $\pm (0.1 \% R + 0.01 \Omega)$                      | $\pm (0.25 \% R + 0.05 \Omega)$                      | $\pm 0.5 \% R$                      |
| 4.16                             | 21 (Ua <sub>1</sub> )<br>21 (Ub)<br>21 (Uc) | Robustness of terminations   | Tensile, bending and torsion  | $\pm (0.1 \% R + 0.01 \Omega)$                      | $\pm (0.25 \% R + 0.05 \Omega)$                      | $\pm 0.5 \% R$                      |
| 4.7                              | -   | Voltage proof                | $U_{RMS} = U_{ins}$ ; 60 s  | No flashover or breakdown                           |  |                                     |



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.