


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

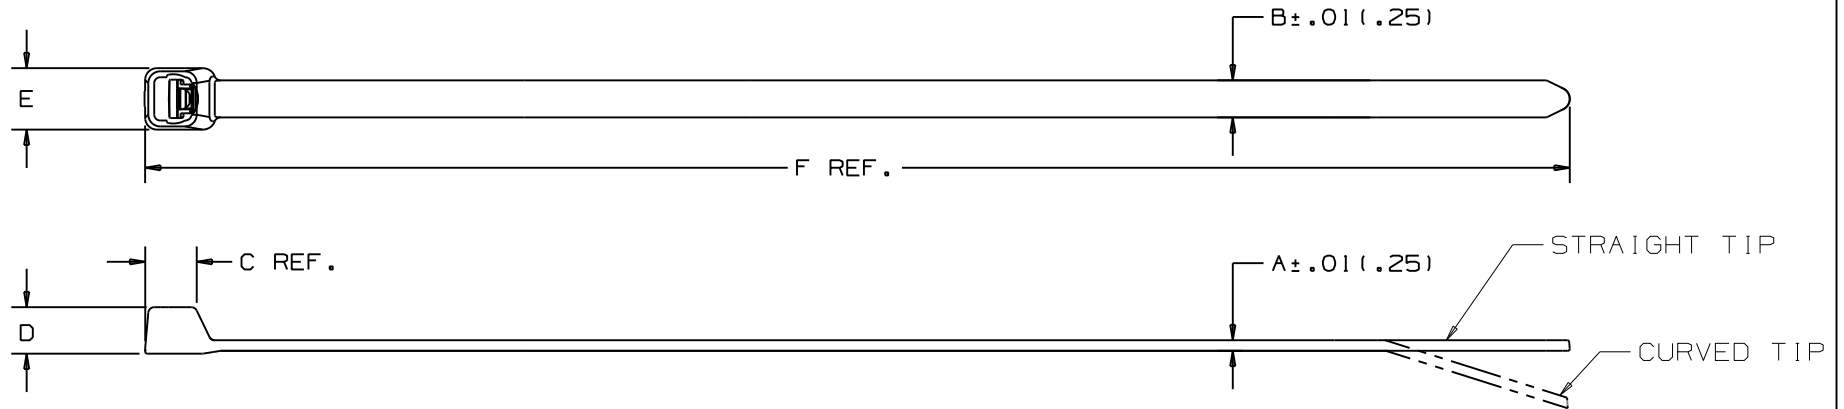

PANDUIT PART NO. *	BUNDLE DIA.		A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	MIN. LOOP TENSILE lbs. ** (N)	CROSS SECTION	TIP STYLE	WEIGHT lbs./100 pcs. (g)
	MIN. in (mm)	MAX. in (mm)										
PLT1M-71	.06 (1.5)	.87 (22)	.048 (1.2)	.098 (2.5)	.192 (4.9)	.131 (3.3)	.188 (4.8)	3.90 (99)	35 (156)	MINIATURE	CURVED	.08 (36)
PLT1.5M-71	.06 (1.5)	1.38 (35)	.048 (1.2)	.098 (2.5)	.192 (4.9)	.131 (3.3)	.188 (4.8)	5.80 (147)	35 (156)	MINIATURE	CURVED	.11 (52)
PLT2S-71	.13 (3.3)	1.88 (48)	.055 (1.4)	.190 (4.8)	.260 (6.6)	.240 (6.1)	.320 (8.1)	7.40 (188)	150 (668)	STANDARD	STRAIGHT	.38 (173)

NOTES:

- *1) SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE.
- 2) MATERIAL HAS A UL RELATIVE THERMAL INDEX RATING OF 500°F (260°C).
- 3) MATERIAL FLAMMABILITY RATING: UL94V-0.
- 4) EXCELLENT RESISTANCE TO MOST CHEMICALS.
- **5) MINIMUM LOOP TENSILE RATING AT 73°F (23°C).

W10035DS/02 SS_27424.PRT

DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS

PANDUIT CORP. TINLEY PARK, ILLINOIS

PAN-TY CABLE TIES
PLT ELEVATED TEMPERATURE SERIES

5	04/14/10	BWG	MPH	CHANGED PARTS ORDER ON CHART. TO BE IN DECENDING SIZE ORDER, LIKE OTHER CUSTOMER DRAWINGS.	27424	5	BOBK	UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) ± .1(2.5)(.XXX) ± .020(.51) (.XX) ± .02(1.5) ANGLES ±	UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.	
4	03/29/10	BWG	MPH	Corrected PLT1M-71 max bundle dia to 22mm, not 2.2 mm.	27424	4	BOBK			
3	03/18/10	BWG	MPH	ADDED 1M AND 1.5M PARTS.	27424	3	BOBK	DRAWN BY JABO DATE 06/01/04 CHK'D DM MAT'L: PEEK COLOR: BROWN REG. T.M. OF VICTREX MFG. LTD.	SCALE NONE	
2	11/15/06	JABO		CORRECTED RELATIVE THERMAL INDEX RATING TEMPERATURE.	27424	2			DRAWING NO. SS-27424	DWG A SIZE
REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST		SUP	